





27th Floor, One Unity Center (Erstwhile One International Center, Tower 4), Senapati Bapat Marg, Prabhadevi (West), Mumbai – 400013 | Tel.: 022-2406 4400 E-mail: illumination@bajajelectricals.com | www.bajajelectricals.com

f BajajElecBiz ⋈ BajajElecBiz @ bajajelecbiz in BajajElectricals

Images of the products shown are for representation purpose only and the actual colour/size may vary.



More than

150

Architectural Lighting
Projects executed

More than
20 YEARS
of presence in
Architectural Lighting

Reached more than

500 MILLION

eye balls







BOOST TOURISM

Facade lighting creates a captivating and inviting atmosphere, encouraging tourists to explore, engage, and spend more time in a destination, ultimately contributing to the growth of tourism.

ENHANCE VISUAL APPEAL

- Enhances the look of buildings and landmarks.
- Makes areas more attractive and inviting.
- Attracts tourists, encouraging them to explore.

CULTURAL SIGNIFICANCE

- Highlights the identity of historical or culturally significant structures.
- Attracts tourists interested in cultural experiences and historical insights.

NIGHT-TIME TOURISM

- Keeps landmarks visible and attractive at night.
- More appeal of destinations for evening exploration.
- Enhances night-time tourism by creating additional attractions.

EVENT HOSTING

- Create captivating backdrops for events and festivals.
- Cultural and entertainment events leverage the enhanced visual environment to boost tourism.





City beautification through architectural lighting is a multidimensional approach that requires collaboration between urban planners, architects, designers, and the community. When done thoughtfully, it can transform the nighttime experience of a city, creating a memorable and enchanting environment for all.

ARCHITECTURAL ACCENTUATION

- Accentuates architectural features, showcasing unique design elements.
- Enhances the visual appeal of buildings and monuments helps to beautifying cities.

CAPTIVATING NIGHTSCAPES

 Creates a sense of identity, community pride, and overall urban beautification.

ENCOURAGE NIGHTTIME ACTIVITIES

- Carefully designed lighting illuminates walkways, parks, and public spaces, improving safety.
- Enhances visibility in these areas promotes a sense of security for residents and visitors.

GLORIFY OUR GREAT HISTORY

(Fort and Historical Monument Lighting)

Facade lighting is a powerful and captivating way to celebrate and glorify a nation's rich history. By illuminating architectural masterpieces and significant landmarks, you can create a visual narrative that tells the story of a great and proud history.

NATIONAL SYMBOLS

Use facade lighting to

emphasize national symbols and emblems.

• Emp

HISTORICAL & CULTURAL IMPORTANCE

- Emphasize the cultural and historical value of the monuments to the community and the nation.
- Highlight the architectural uniqueness and the role the monuments played in the past.

RESTORATION AND STRENGTHENING OF HISTORICAL BUILDINGS

Restoration and strengthening of historical buildings requires a comprehensive approach that addresses not only the preservation of cultural heritage but also incorporates sustainable revenue models. Facade lighting can be a key component in enhancing the appeal of historical buildings and attracting attention.



CONNECTING NIGHT LIFE & EMOTIONS OF PEOPLE

(Festive and Special Day Lighting Schemes)

Integrating facade lighting to connect with the night life and emotions of people, especially during festive and special occasions, helps to create a vibrant and memorable atmosphere.

DYNAMIC LIGHTING AND CONTROL SYSTEMS

 Create thematic displays, seasonal variations, and festive celebrations, unity & pride among residents with customised colors, patterns and themes.

BRANDING

Well-lit facades provide excellent opportunities for photography.

Tourists often share their experiences through social media, attracting more attention to the destination and potentially influencing others to visit.

CITY BRANDING

 Illuminate cityscapes to reflect identity and brand with lighting.

PUBLIC PARTICIPATION & SOCIAL MEDIA INTEGRATION

- Designate photo spots with optimal lighting for social media sharing.
- Promote community engagement with specific hashtags for the illuminated building.

INTEGRATION WITH DIGITAL MARKETING

- Integrate facade lighting into digital marketing campaigns for a cohesive brand experience.
- Synchronize lighting displays with online promotions or social media events for immersive engagement.

MEMORABLE EXPERIENCE


 Incorporate interactive elements for customer engagement and Contributes to positive word-of-mouth and social media sharing.







An architectural Projector light is designed to project a controlled beam of light onto a building facade or an architectural element. Architectural lighting injects character and drama into architecture at night and transforms it into an inspired night scape. Projector lights with optical distributions ranging from narrow to wide beams, are the equipment of choice for translating an architectural lighting design into a memorable, sensible scene. Fascinating patterns of light delivered by these light fixtures can lend prestige, symbolism, and recognition to a building.

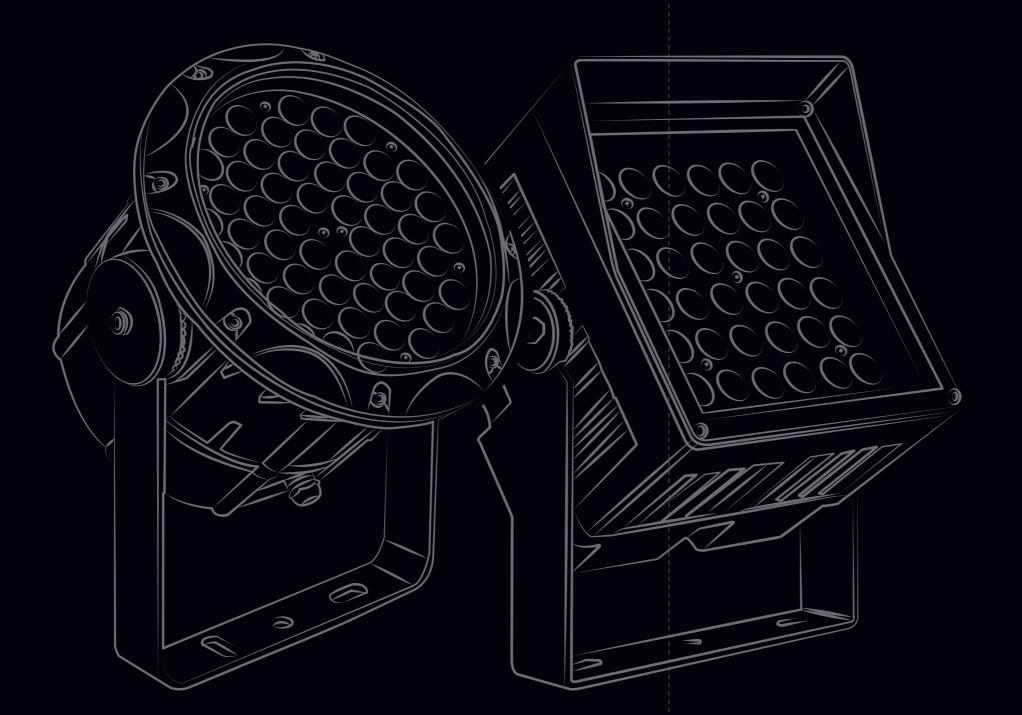

PRODUCT HIGHLIGHTS



Quality metal-core PCB with super drive technology



Superior Control with DMX/RDM



Different light distributions & wide range of light colours



Constant locking hinge with adjustable 15° step tilt angle



Excellent thermal management ensures long LED life



Anti reflection optical technology offers maximum visual comfort

APPLICATIONS

Architectu Buildings Statues & Monuments

Flags & Banners Bridges, Overnasse Treetops



BUGA

Round Projector

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Die-Casting Aluminium with corrosion resistance.
- · Compact, excellent in heat dissipation.
- Constant locking hinge with adjustable tilt angles
- Toughened glass for impact resistance.
- Anti Glare snoot/hood (on demand).
- IP 68 Connectors


LED AND OPTICALS

- High power LEDs with tailor made lens
- Symmetric and Asymmetric distribution.
- Full range of CCT and RGBW

CONTROL MODE

- DMX/RDM controllable
- Static lighting









RoHS guidelines



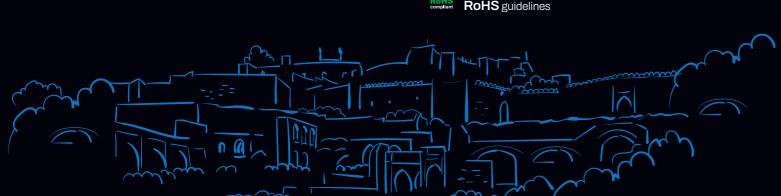

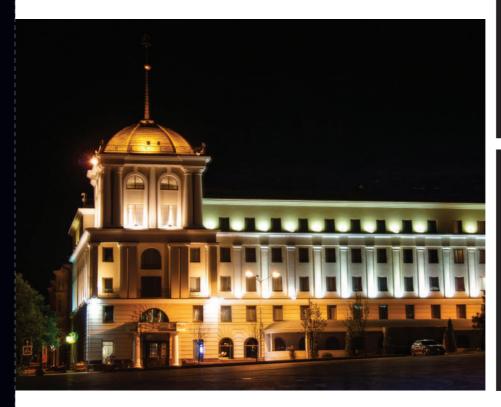





TECHNICAL SPECIFICATIONS

| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | D (MM) | H (MM) | MOUNTING BOLT |
|---------------|-------|---------|---------------|---------|-----------|-----------|------------------|
| BUGA AC 6W | 6W | 240V AC | WW | - | 105 | 130 | M5 |
| BUGA DC 6W | 6W | 24V DC | RGBW | DMX | 105 | 130 | M5 |
| BUGA AC 10W | 10W | 240V AC | WW | - | 130 | 160 | M5 |
| BUGA DC 10W | 10W | 24V DC | RGBW | DMX | 105 | 130 | M5 |
| BUGA AC 15W | 15W | 240V AC | WW | | 130 | 160 | M5 |
| BUGA AC 18W | 18W | 240V AC | WW | - | 150 | 190 | M6 |
| BUGA DC 18W | 18W | 24V DC | RGBW | DMX | 130 | 160 | M5 |
| BUGA AC 24W | 24W | 240V AC | WW | - | 150 | 190 | M6 |
| BUGA DC 24W | 24W | 24V DC | RGBW | DMX | 130 | 160 | M5 |
| BUGA AC 36W | 36W | 240V AC | WW | - | 180 | 210 | M8 |
| BUGA DC 36W | 36W | 24V DC | RGBW | DMX | 150 | 190 | M6 |
| BUGA DC 48W | 48W | 24V DC | RGBW | DMX | 180 | 210 | M8 |
| BUGA AC 54W | 54W | 240V AC | WW | - | 235 | 290 | M8 |
| BUGA DC 54W | 54W | 24V DC | RGBW | DMX | 180 | 210 | M8 |
| BUGA AC 54W | 54W | 240V AC | RGBW | DMX | 235 | 290 | M8 |
| BUGA AC 72W | 72W | 240V AC | WW | - | 290 | 320 | M8 |
| BUGA AC 72W | 72W | 240V AC | RGBW | DMX | 235 | 290 | M8 |
| BUGA AC 85W | 85W | 240V AC | RGBW | DMX | 235 | 290 | M8 |
| BUGA AC 85W | 85W | 240V AC | WW | - | 290 | 320 | M8 |
| BUGA AC 100W | 100W | 240V AC | WW | - | 290 | 320 | M8 |
| BUGA AC 100W | 100W | 240V AC | RGBW | DMX | 290 | 320 | M8 |

120W

240V AC

BUGA AC 120W

NW(4000K) Available on request. Available Beam Angles 8°, 15°, 25°, 30°, 45°, 60°


DMX

290 320

M8

RGBW

DIMENSONAL DRAWING



Tolerence in dimensions will be ±2mm





BUGA

Rectangle Projector (Flood Light)

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Die-Casting Aluminium with corrosion resistance.
- · Compact, excellent in heat dissipation.
- Constant locking hinge with adjustable tilt angles
- Toughened glass for impact resistance.
- Anti Glare snoot/hood (on demand).
- IP 68 Connectors

LED AND OPTICALS


- High power LEDs with tailor made lens
- Symmetric and Asymmetric distribution.
- Full range of CCT and RGBW

CONTROL MODE

- DMX/RDM controllable
- Static lighting




Ingress Protection





RoHS guidelines









TECHNICAL SPECIFICATIONS


| MODEL | DOWED | VOLTACE | COT/ | CONTROL | | W | H1 | 110 | MD* |
|-----------------|-------|---------|---------------|---------|------|------|------|-----|-----|
| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | (MM) | (MM) | (MM) | | MB* |
| BUGA FL AC 100W | 100W | 240V AC | WW | - | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 100W | 100W | 240V AC | RGBW | DMX | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 120W | 120W | 240V AC | WW | - | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 120W | 120W | 240V AC | RGBW | DMX | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 150W | 150W | 240V AC | WW | - | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 150W | 150W | 240V AC | RGBW | DMX | 404 | 125 | 196 | 272 | M8 |
| BUGA FL AC 180W | 180W | 240V AC | WW | - | 490 | 130 | 206 | 308 | M8 |
| BUGA FL AC 180W | 180W | 240V AC | RGBW | DMX | 490 | 130 | 206 | 308 | M8 |
| BUGA FL AC 200W | 200W | 240V AC | RGBW | DMX | 490 | 130 | 206 | 308 | M8 |
| BUGA FL AC 200W | 200W | 240V AC | WW | - | 650 | 140 | 215 | 356 | M8 |
| BUGA FL AC 250W | 250W | 240V AC | WW | - | 650 | 140 | 215 | 356 | M8 |
| BUGA FL AC 250W | 250W | 240V AC | RGBW | DMX | 650 | 140 | 215 | 356 | M8 |
| BUGA FL AC 300W | 300W | 240V AC | WW | - | 650 | 140 | 215 | 356 | M8 |
| BUGA FL AC 300W | 300W | 240V AC | RGBW | DMX | 650 | 140 | 215 | 356 | M8 |
| BUGA FL AC 350W | 350W | 240V AC | WW | - | 554 | 130 | 206 | 501 | M8 |
| BUGA FL AC 350W | 350W | 240V AC | RGBW | DMX | 554 | 130 | 206 | 501 | M8 |
| BUGA FL AC 400W | 400W | 240V AC | WW | - | 554 | 130 | 206 | 501 | M8 |
| BUGA FL AC 400W | 400W | 240V AC | RGBW | DMX | 554 | 130 | 206 | 501 | M8 |
| BUGA FL AC 600W | 600W | 240V AC | WW | - | 554 | 130 | 206 | 501 | M8 |
| BUGA FL AC 600W | 600W | 240V AC | RGBW | DMX | 554 | 130 | 206 | 501 | M8 |


*Mounting Bolt.

NW(4000K) Available on request.

Available Beam Angles 3°, 5°, 8°, 15°, 25°, 30°











MERC

Square Projector

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Die-Casting Aluminium with corrosion resistance.
- · Compact, excellent in heat dissipation.
- Constant locking hinge with adjustable tilt angles
- Toughened glass for impact resistance.
- Anti Glare snoot/hood (on demand).
- IP 68 Connectors

LED AND OPTICALS

- High power LEDs with tailor made lens
- Symmetric and Asymmetric distribution.
- Full range of CCT and RGBW

CONTROL MODE

- DMX/RDM controllable
- Static lighting





Ingress Protection





RoHS guidelines



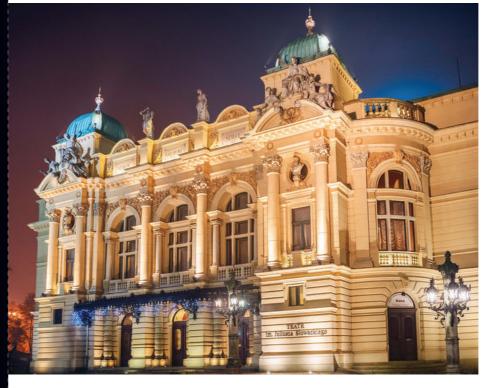





TECHNICAL SPECIFICATIONS


| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | L (MM) | W (MM) | H (MM) | MB* |
|---------------|-------|---------|---------------|---------|-----------|-----------|-----------|-----|
| MERC 6W | 6W | 240V AC | WW | - | 85 | 85 | 125 | M5 |
| MERC 6W | 6W | 24V DC | RGBW | DMX | 85 | 85 | 125 | M5 |
| MERC 10W | 10W | 240V AC | WW | - | 105 | 105 | 140 | M5 |
| MERC 10W | 10W | 24V DC | RGBW | DMX | 85 | 85 | 125 | M5 |
| MERC 15W | 15W | 240V AC | WW | - | 105 | 105 | 140 | M5 |
| MERC 18W | 18W | 240V AC | WW | - | 130 | 130 | 172 | M6 |
| MERC 18W | 15W | 24V DC | RGBW | DMX | 105 | 105 | 140 | M5 |
| MERC 18W | 18W | 24V DC | RGBW | DMX | 105 | 105 | 140 | M5 |
| MERC 24W | 24W | 240V AC | WW | - | 130 | 130 | 172 | M6 |
| MERC 24W | 24W | 24V DC | RGBW | DMX | 105 | 105 | 140 | M5 |
| MERC 36W | 36W | 240V AC | WW | - | 150 | 150 | 185 | M8 |
| MERC 36W | 36W | 24V DC | RGBW | DMX | 130 | 130 | 172 | M6 |
| MERC 48W | 48W | 24V DC | RGBW | DMX | 150 | 150 | 185 | M8 |
| MERC 54W | 54W | 240V AC | WW | - | 180 | 180 | 185 | M8 |
| MERC 54W | 54W | 24V DC | RGBW | DMX | 150 | 150 | 185 | M8 |
| MERC 54W | 54W | 240V AC | RGBW | DMX | 180 | 180 | 185 | M8 |
| MERC 72W | 72W | 240V AC | WW | - | 245 | 245 | 260 | M8 |
| MERC 72W | 72W | 240V AC | RGBW | DMX | 180 | 180 | 185 | M8 |
| MERC 85W | 85W | 240V AC | RGBW | DMX | 180 | 180 | 185 | M8 |
| MERC 85W | 85W | 240V AC | WW | - | 245 | 245 | 260 | M8 |
| MERC 100W | 100W | 240V AC | WW | - | 245 | 245 | 260 | M8 |
| MERC 100W | 100W | 240V AC | RGBW | DMX | 245 | 245 | 260 | M8 |
| MERC 120W | 120W | 240V AC | RGBW | DMX | 245 | 245 | 260 | M8 |

*Mounting Bolt.

NW(4000K) Available on request.

Available Beam Angles 8°, 15°, 25°, 30°, 45°, 60°

DIMENSONAL DRAWING




Tolerence in dimensions will be ±2mm





Wall Washers enables to create a unique identity for monuments and buildings. It comes with compact and elegant design for minimum impact on architecture / monument. It offers a wide palette of colours and lighting effects for creating warm and happening ambiance. Wall washer are designed to create striking lighting effects and enhance the value of architectural buildings at night. Using control systems, dynamic lighting scenarios can be achieved for dramatic results.

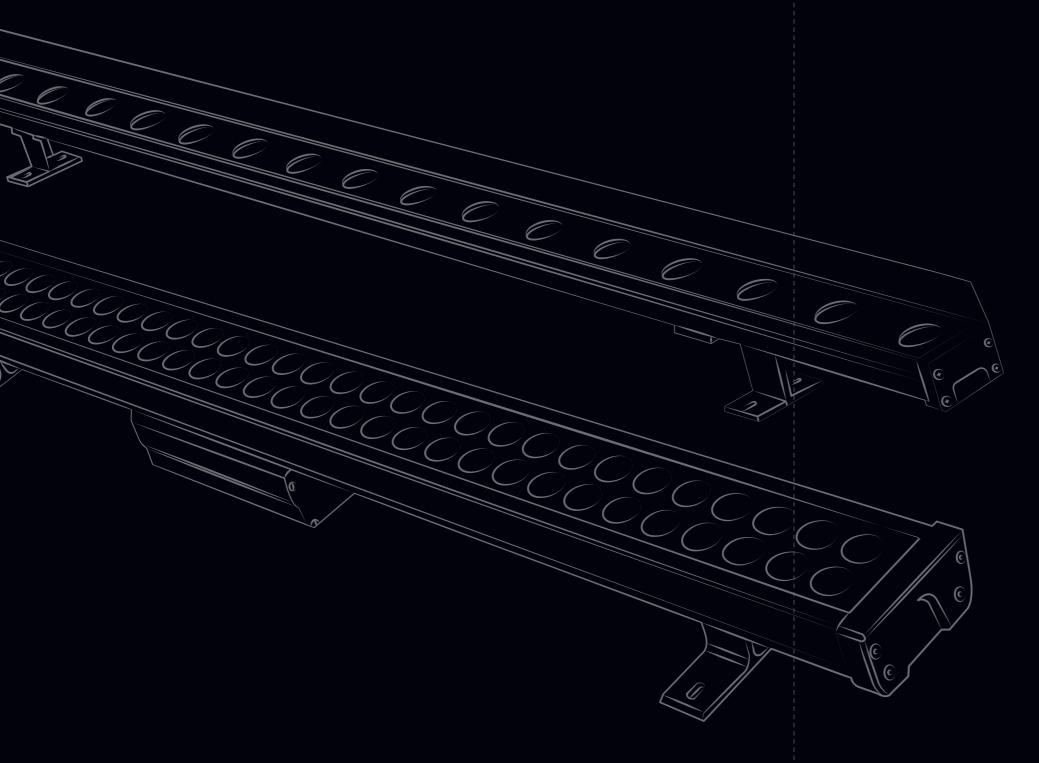

PRODUCT HIGHLIGHTS



Quality metal-core PCB with super drive technology



Superior Control with DMX/RDM



Different light distributions & wide range of light colours



Constant locking hinge with adjustable 15° step tilt angle



Excellent thermal management ensures long LED life



Anti reflection optical technology offers maximum visual comfort

APPLICATIONS

Architectu Buildings Statues & Monuments

Bridges, Overpasses





LIMO **Linear Wall Washer**

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Extruded Aluminum with corrosion resistance.
- · Compact, excellent in heat dissipation.
- Toughen glass for high impact resistance.
- · Constant locking hinge with adjustable tilt angles.
- Anti Glare snoot/hood (on demand).
- IP 68 Connectors.

LED AND OPTICALS


- High power LEDs with tailor made lens
- · Symmetric and Asymmetric distribution.
- Full range of CCT and RGBW

CONTROL MODE

- DMX/RDM controllable
- Static lighting




Ingress Protection





RoHS guidelines









TECHNICAL SPECIFICATIONS


| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | L (MM) | W (MM) | H1 (MM) | H2 (MM) | MB* |
|---------------|-------|---------|---------------|---------|-----------|-----------|------------|------------|-----|
| LIMO 5W | 5W | 24V DC | WW/RGBW | DMX | 500 | 33 | 40 | 85 | M5 |
| LIMO 10W | 10W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 12W | 12W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 15W | 15W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 18W | 18W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 24W | 24W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 30W | 30W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 36W | 36W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 40W | 40W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 45W | 45W | 24V DC | WW/RGBW | DMX | 1000 | 33 | 40 | 85 | M5 |
| LIMO 50W | 50W | 24V DC | WW/RGBW | DMX | 1000 | 65 | 50 | 125 | M6 |
| LIMO 60W | 60W | 24V DC | WW/RGBW | DMX | 1000 | 65 | 50 | 125 | M6 |
| LIMO 72W | 72W | 24V DC | WW/RGBW | DMX | 1000 | 65 | 50 | 125 | M6 |
| LIMO 80W | 80W | 24V DC | WW/RGBW | DMX | 1000 | 65 | 50 | 125 | M6 |
| LIMO 96W | 96W | 24V DC | WW/RGBW | DMX | 1000 | 65 | 50 | 125 | M6 |

*Mounting Bolt.

DMX Controls are applicable in case of RGBW only.

NW(4000K) Available on request. Available Beam Angles 10x30°, 10x60°, 15x45°, 15°, 25°, 40°


DIMENSONAL DRAWING







Outline Tubes range is composed of linear outliner highlighter fitted with white or RGBW low-power LEDs for marker or accent illumination. The compact design of product ensures perfect vertical and horizontal integration in all types of structures to highlight architectural details. As a versatile ground-lighting solution, Our outline tube can also be used to show people the way inside underpasses or any other building.

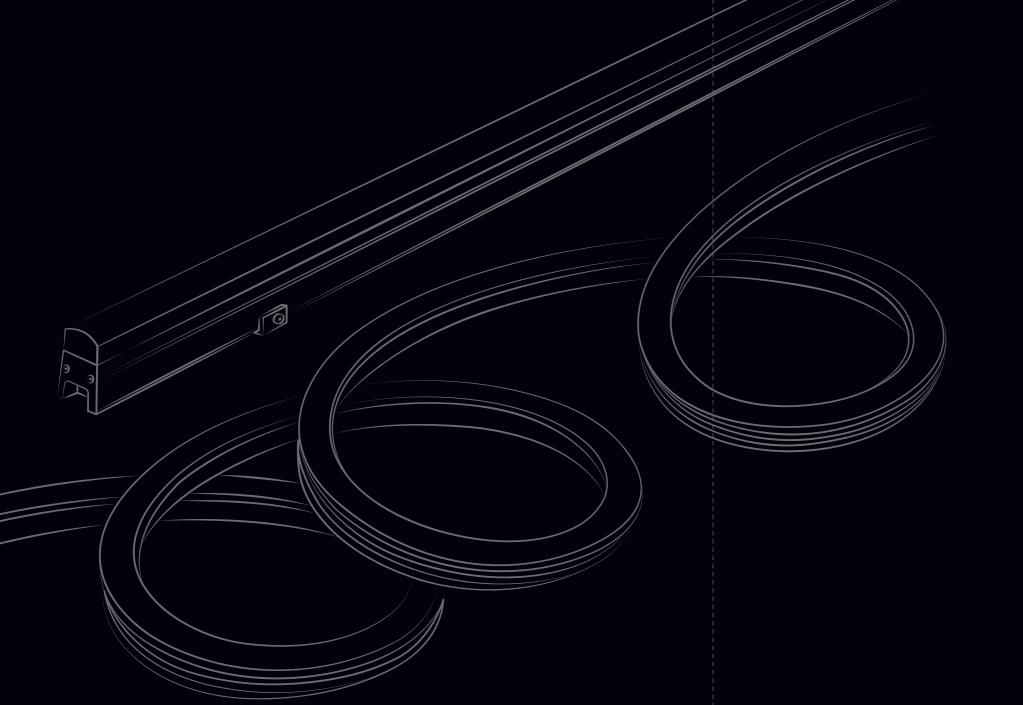

PRODUCT HIGHLIGHTS



Quality metal-core PCB with super drive technology



Superior Control with DMX



Different light distributions & wide range of light colours



Excellent thermal management ensures long LED life



Anti reflection optical technology offers maximum visual comfort

APPLICATIONS

Building

Stations & Metro

Sports Facilities Bridges, Overnass

Car Parking





Linear Outline Tubes

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Extruded Aluminum with corrosion resistance.
- High quality diffuser for visual comfort.
- Continuous line of light.
- IP68 connectors.

LED AND OPTICALS

- High Power LEDs
- Full Range of CCT and RGBW.

CONTROL MODE

- DMX controllable
- Static lighting




Ingress Protection









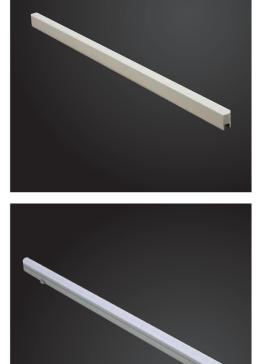

TECHNICAL SPECIFICATIONS


| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | L (MM) | W (MM) | H (MM) | MB* |
|---------------|-------|---------|---------------|---------|-----------|-----------|-----------|-----|
| STAMO 5W | 5W | 24V DC | WW/RGBW | DMX | 300 | 30 | 43 | M4 |
| STAMO 10W | 10W | 24V DC | WW/RGBW | DMX | 1000 | 30 | 43 | M4 |
| STAMO 12W | 12W | 24V DC | WW/RGBW | DMX | 1000 | 30 | 43 | M4 |
| STAMO 15W | 15W | 24V DC | WW/RGBW | DMX | 1000 | 30 | 43 | M4 |
| STAMO 18W | 18W | 24V DC | WW/RGBW | DMX | 1000 | 30 | 43 | M4 |

*Mounting Bolt.

DMX Controls are applicable in case of RGBW only.

NW(4000K) Available on request.

DIMENSONAL DRAWING









BENT

Flexible Neon Tubes

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Silicon mounted flexible tube with vertical and horizontal bending options
- Compact design
- Continuous line of light.
- IP68 connectors.

LED AND OPTICALS

- High Power LEDs
- Full Range of CCT and RGBW.

CONTROL MODE

- DMX controllable
- Static lighting





Ingress Protection





RoHS guidelines



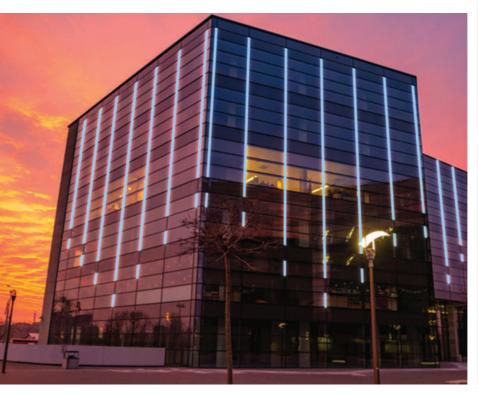







TECHNICAL SPECIFICATIONS

| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | W (MM) | H (MM) | |
|--------------|-------|---------|---------------|---------|-----------|-----------|--|
| BENT FLX 5W | 5W | 24V DC | WW | - | 6 | 12 | |
| BENT FLX 5W | 5W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 8W | 8W | 24V DC | WW | - | 6 | 12 | |
| BENT FLX 8W | 8W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 10W | 10W | 24V DC | WW | - | 16 | 16 | |
| BENT FLX 10W | 10W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 12W | 12W | 24V DC | WW | - | 16 | 16 | |
| BENT FLX 12W | 12W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 14W | 14W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 16W | 16W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 18W | 18W | 24V DC | WW | - | 16 | 16 | |
| BENT FLX 18W | 18W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 20W | 20W | 24V DC | WW | - | 16 | 16 | |
| BENT FLX 20W | 20W | 24V DC | RGBW | DMX | 20 | 20 | |
| BENT FLX 24W | 24W | 24V DC | WW | - | 16 | 16 | |
| BENT FLX 24W | 24W | 24V DC | RGBW | DMX | 20 | 20 | |

NW/4000K, Tri-Colour and different colours on request. (MOQ: 2KM)

DIMENSONAL DRAWING









PIXEL LIGHTS

The purpose of Pixel lighting is to enhance experiences, evoke emotions, and create memorable interactions through the use of dynamic and controllable light. Whether it's in architectural, artistic, or commercial contexts, pixel lighting offers a versatile and powerful tool for creative expression and functional illumination.

PRODUCT HIGHLIGHTS



Compact size



DMX Controllable



Customization for unique lighting effects.



Wide range of light colours



High Thermal Conductivity




Flexiblity of Installation.

APPLICATIONS

Government Buildings | Art Galleries | Complexes

Bridges & Structures



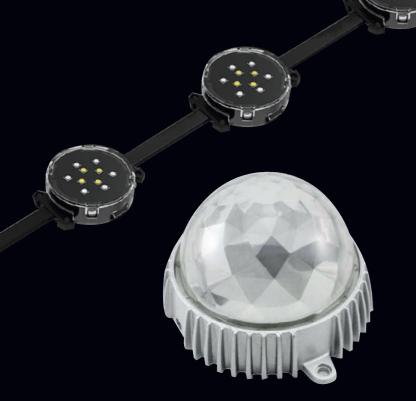

SUZU Pixel Lights

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- · Aluminium/Polycarbonate Housing
- Clip on-off style connection.
- Flame retardant feature.

LED AND OPTICALS


- Symmetric Distribution of light
- Full range of CCT and RGBW

CONTROL MODE

- DMX controllable
- Static lighting





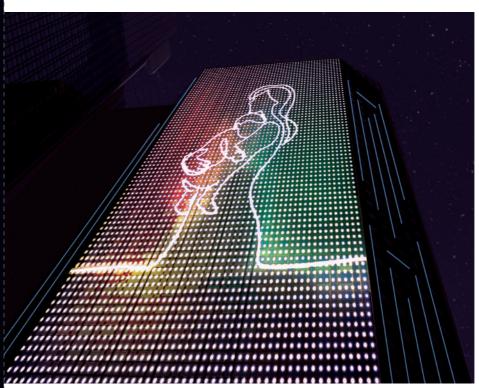






TECHNICAL SPECIFICATIONS

| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | D (MM) | H (MM) | |
|------------|-------|---------|---------------|---------|-----------|-----------|--|
| SUZU 0.75W | 0.75W | 24V DC | RGBW | DMX | 35 | 15.75 | |
| SUZU 1.8W | 1.8W | 24V DC | RGBW | DMX | 40 | 15.75 | |
| SUZU 1W | 1W | 24V DC | WW/RGBW | DMX | 70 | 52 | |
| SUZU 3W | 3W | 24V DC | WW/RGBW | DMX | 70 | 52 | |
| SUZU 5W | 5W | 24V DC | WW/RGBW | DMX | 100 | 75 | |
| SUZU 6W | 6W | 24V DC | WW/RGBW | DMX | 100 | 75 | |
| SUZU 9W | 9W | 24V DC | WW/RGBW | DMX | 120 | 80 | |
| SUZU 12W | 12W | 24V DC | WW/RGBW | DMX | 120 | 80 | |

Pixels per meter will depend on the requirement of the project

DMX controls are applicable in case of RGBW only

DIMENSONAL DRAWING

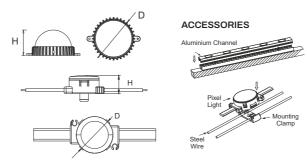


Tolerence in dimensions will be ±2mm Accessories only on request.



WALK OVER LIGHTS

Walk over lights are typically recessed into the ground or pavement, providing illumination while minimizing visual clutter and avoiding obtrusiveness during daylight hours. These are used to highlight architectural features, guide pathways, or create dramatic lighting effects. Buried lights are designed with various light distributions, colors, and intensities to achieve specific lighting objectives and create ambiance in outdoor environments. RGBW buried lights also provide functional illumination, enhancing safety and visibility in outdoor areas while adding visual interest and enhancing the architectural features of the surrounding environment.

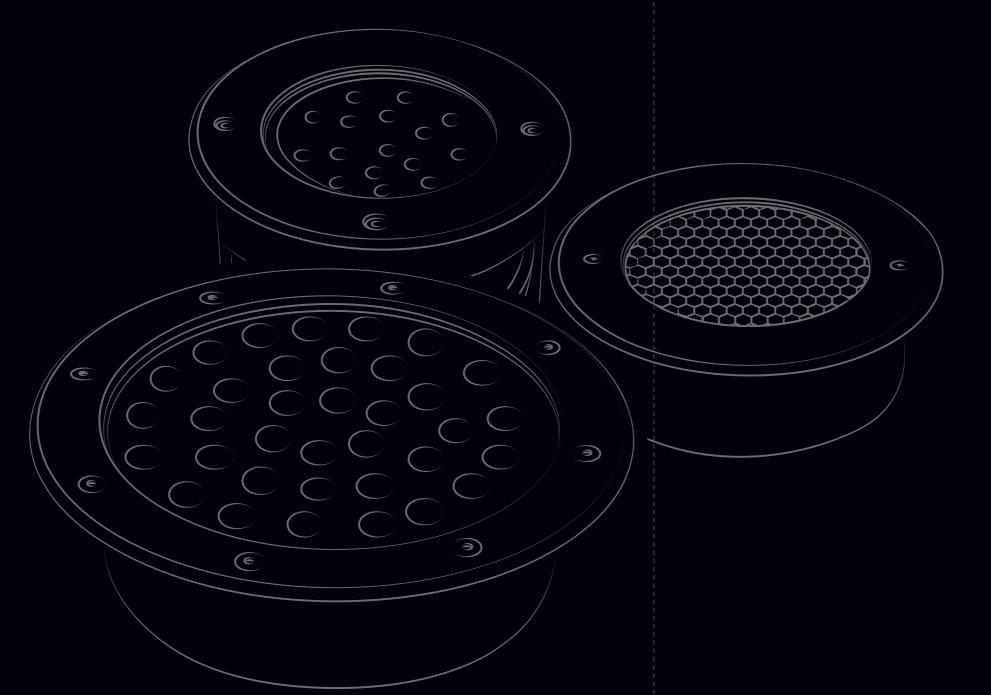

PRODUCT HIGHLIGHTS

DMX

Superior Control with DMX



Different light distributions & wide range of light colours



Wide ranage of light colours



Excellent thermal management ensures long LED life



Anti reflection optical technology offers maximum visual comfort

APPLICATIONS

Parks & Driveways, & Monuments Uplighting Gardens Pedestrian Walkways





COOP

Walk Over Lights

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Toughened glass for impact resistance.
- Stainless steel front cover for higher strength.
- An aluminum die-cast body with a round brushed stainless steel frame house.
- Symmetrical and asymmetrical light distribution.
- · Static load resistance.

LED AND OPTICALS

- High Power LEDs
- Full Range of CCT and RGBW.

CONTROL MODE

- DMX/RDM controllable
- Static lighting





Ingress Protection





RoHS guidelines



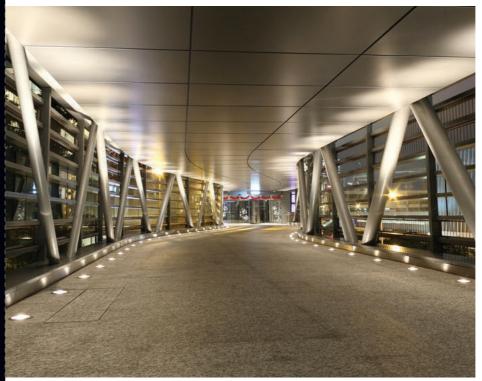






TECHNICAL SPECIFICATIONS

| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | D (MM) | H (MM) | |
|------------|-------|---------|---------------|---------|-----------|-----------|--|
| COOP1W | 1W | 220V AC | WW | - | 65 | 80 | |
| COOP1W | 1W | 24V DC | RGBW | DMX | 65 | 80 | |
| COOP 5W | 5W | 220V AC | WW | - | 100 | 80 | |
| COOP 5W | 5W | 24V DC | RGBW | DMX | 100 | 80 | |
| COOP 6W | 6W | 220V AC | WW | - | 120 | 90 | |
| COOP 6W | 6W | 24V DC | RGBW | DMX | 120 | 90 | |
| COOP12W | 12W | 220V AC | WW | - | 180 | 90 | |
| COOP12W | 12W | 24V DC | RGBW | DMX | 180 | 90 | |
| COOP15W | 15W | 220V AC | WW | - | 200 | 90 | |
| COOP15W | 15W | 24V DC | RGBW | DMX | 200 | 90 | |
| COOP 20W | 20W | 220V AC | WW | - | 220 | 90 | |
| COOP 20W | 20W | 24V DC | RGBW | DMX | 220 | 90 | |
| COOP 28W | 28W | 220V AC | WW | - | 250 | 90 | |
| COOP 28W | 28W | 24V DC | RGBW | DMX | 250 | 90 | |
| COOP 36W | 36W | 220V AC | WW | - | 250 | 90 | |
| COOP 36W | 36W | 24V DC | RGBW | DMX | 250 | 90 | |
| COOP 40W | 40W | 220V AC | WW | - | 300 | 90 | |
| COOP 40W | 40W | 24V DC | RGBW | DMX | 300 | 90 | |
| COOP 45W | 45W | 220V AC | WW | - | 300 | 90 | |
| COOP 45W | 45W | 24V DC | RGBW | DMX | 300 | 90 | |
| COOP 48W | 48W | 220V AC | WW | - | 300 | 90 | |
| COOP 48W | 48W | 24V DC | RGBW | DMX | 300 | 90 | |


DIMENSONAL DRAWING



Tolerence in dimensions will be ±2mm





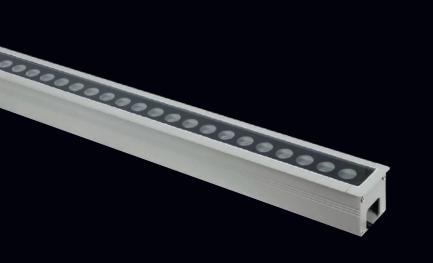

COOP Linear Walk Over Lights

PRODUCT FEATURES

HOUSING AND ACCESSORIES

- Toughened glass for impact resistance.
- Stainless steel front cover for higher strength.
- An aluminum die-cast body with a round brushed stainless steel frame house.
- Symmetrical and asymmetrical light distribution.
- · Static load resistance.

LED AND OPTICALS

- High Power LEDs
- Full Range of CCT and RGBW.

CONTROL MODE

- DMX/RDM controllable
- Static lighting




Ingress Protection





RoHS guidelines











TECHNICAL SPECIFICATIONS


| MODEL REF. | POWER | VOLTAGE | CCT/ COLOR | CONTROL | L (MM) | W (MM) | H (MM) |
|------------|-------|---------|---------------|---------|-----------|-----------|-----------|
| COOP 6W | 6W | 240V AC | WW | - | 300 | 90 | 90 |
| COOP 6W | 6W | 24V DC | RGBW | DMX | 300 | 90 | 90 |
| COOP9W | 9W | 240V AC | WW | - | 300 | 90 | 90 |
| COOP9W | 9W | 24V DC | RGBW | DMX | 300 | 90 | 90 |
| COOP12W | 12W | 240V AC | WW | - | 500 | 90 | 90 |
| COOP12W | 12W | 24V DC | RGBW | DMX | 500 | 90 | 90 |
| COOP18W | 18W | 240V AC | WW | - | 500 | 90 | 90 |
| COOP18W | 18W | 24V DC | RGBW | DMX | 500 | 90 | 90 |
| COOP 24W | 24W | 240V AC | WW | - | 1000 | 90 | 90 |
| COOP 24W | 24W | 24V DC | RGBW | DMX | 1000 | 90 | 90 |
| COOP 36W | 36W | 240V AC | WW | - | 1000 | 90 | 90 |
| COOP 36W | 36W | 24V DC | RGBW | DMX | 1000 | 90 | 90 |
| COOP 40W | 40W | 240V AC | WW | - | 1000 | 90 | 90 |
| COOP 40W | 40W | 24V DC | RGBW | DMX | 1000 | 90 | 90 |
| COOP 48W | 48W | 240V AC | WW | - | 1000 | 90 | 90 |
| COOP 48W | 48W | 24V DC | RGBW | DMX | 1000 | 90 | 90 |









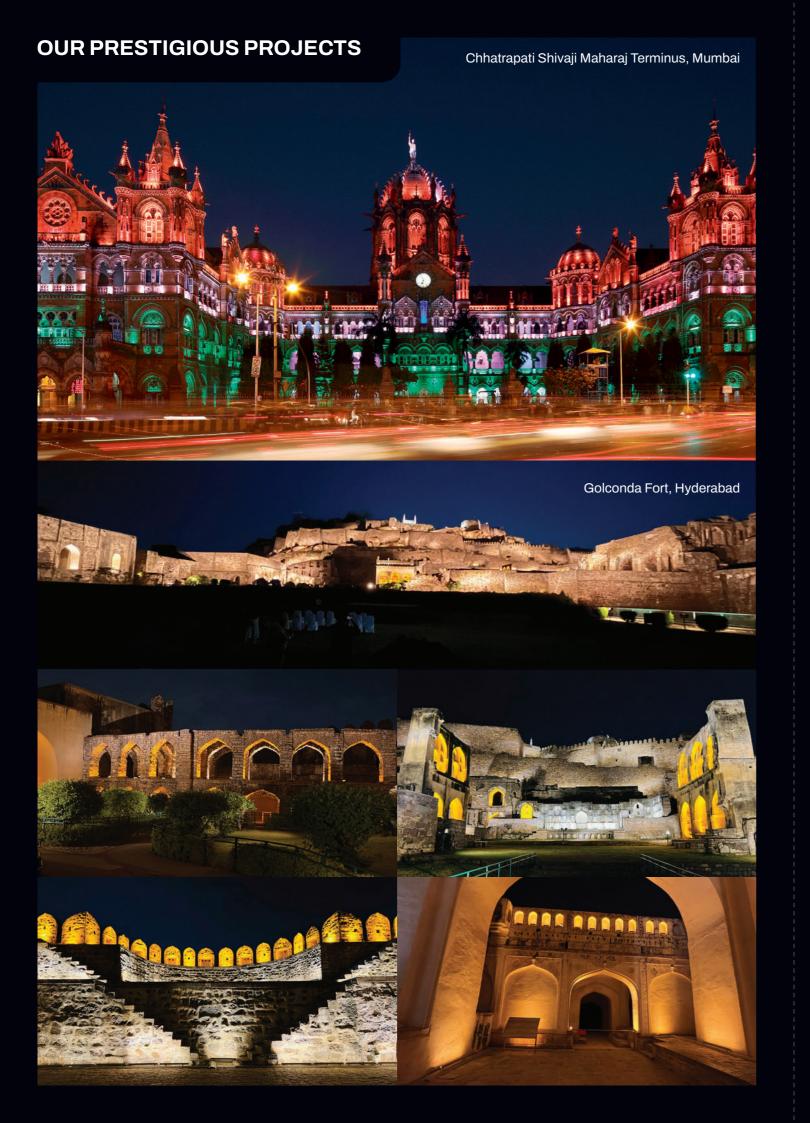

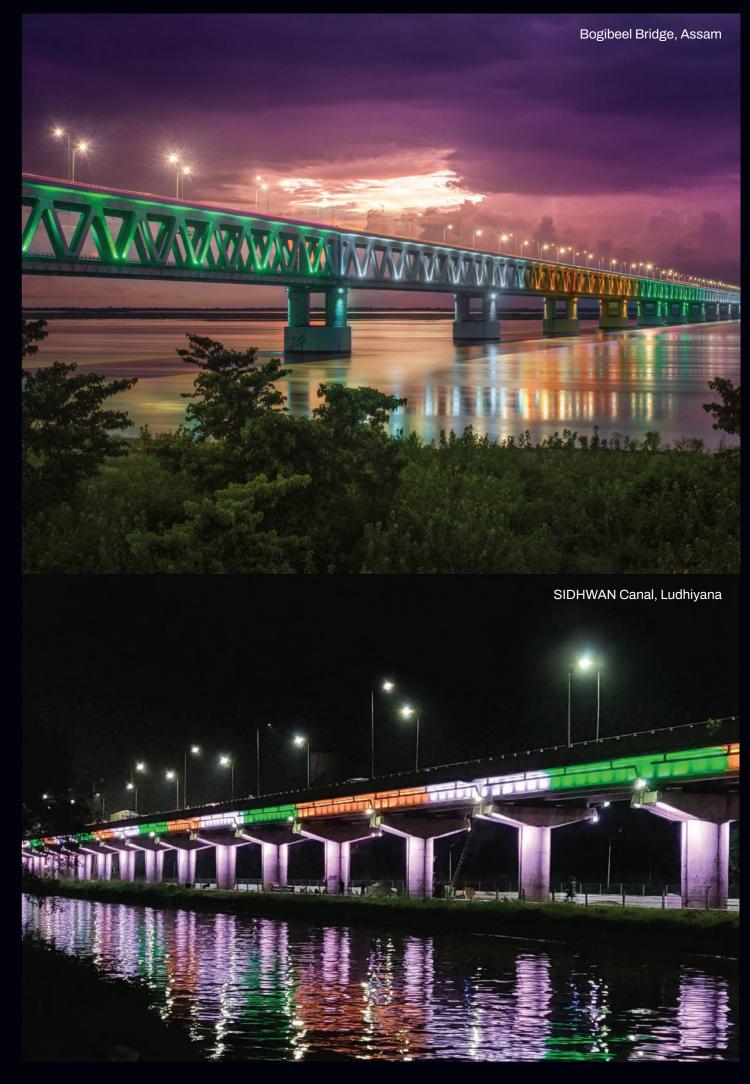



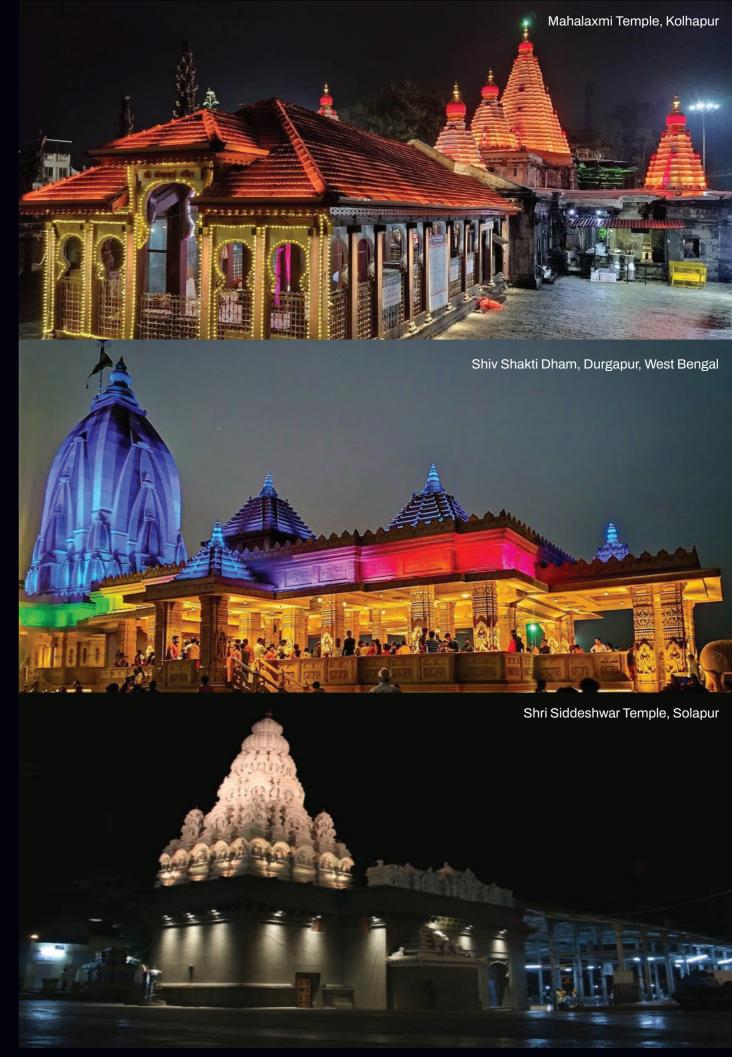

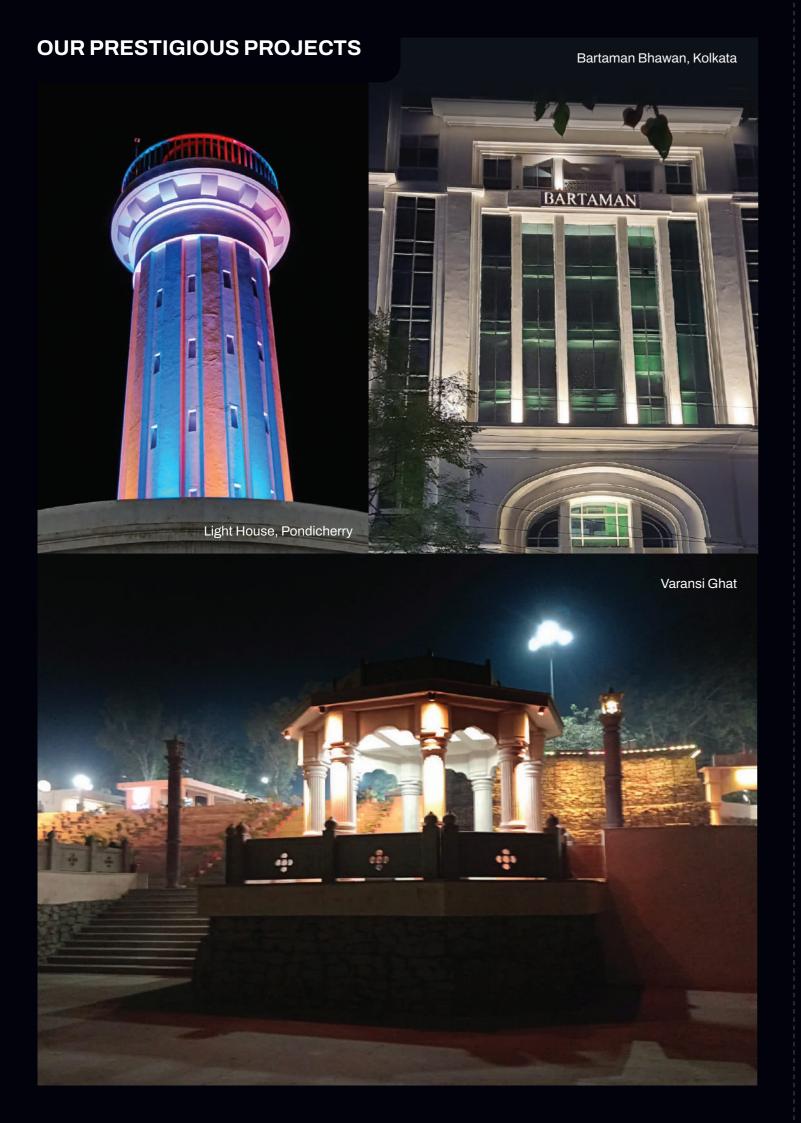

POLAR CURVES

