

**PHILIPS**

Professional Lighting



Your **Vision.**  
Our **Solutions.**

Effective 1st January, 2024

Bandra-Worli Sea Link, Maharashtra



## Proudly illuminating India for more than 90 years

Signify is the world leader in lighting, founded as Philips in Eindhoven, the Netherlands. We've led the lighting industry with innovations that serve professional and consumer markets for more than 127 years. In 2016, we spun off from Philips, becoming a separate publicly owned company, listed on Amsterdam's Euronext Stock Exchange. We were included in the benchmark AEX index in March 2018.

## Our brands

**PHILIPS**

**interact**

 **COLOR KINETICS**

dynalite 

**ECOLINK**

**WiZ**



# Philips **LED lighting**

Leading the market today,  
**Transforming the future.**

Philips has been designing, developing and manufacturing LED lighting products resulting in a far-reaching intellectual property portfolio and more than 20,000 time-tested installations. We have strengthened our leadership position and revenue generation in the LED Lighting market with solutions across segments, offices, retails, industries and public. We are leaders in technology and product performance in the LED lighting industry and are a confident choice of lighting specifiers across the globe.

Atal Bridge, Gujarat



## 100% carbon neutral in India, and globally

We are very proud that we became carbon neutral in 2020, ahead of our target and ahead of the aspirations as set out in the Paris Agreement. This is no easy feat for a major company with manufacturing facilities worldwide and a global logistics footprint. Now, we embark on a new, five-year journey to double our positive impact on the environment and society with our Brighter Lives, Better World 2025 program.

## Brighter Lives, Better World 2025



Double our revenues for brighter lives which benefit the society



Double the pace of the Paris Agreement



Double our circular revenues



Double our percentage of women in leadership



Our commitment to the sustainable development goals

# Contents

|                                      |            |
|--------------------------------------|------------|
| <b>Indoor Commercial</b>             | <b>10</b>  |
| Suspended-Surface Mounted Luminaires | 14         |
| Recessed Mounted Luminaires          | 35         |
| Commercial Battens                   | 41         |
| Downlights & Spotlights              | 43         |
| Track & Spotlights                   | 48         |
| Cove Lights                          | 55         |
| Trunking                             | 59         |
| <b>Indoor Industrial</b>             | <b>60</b>  |
| Highbays                             | 63         |
| LED Bulkhead & WellGlass             | 69         |
| Industrial Battens                   | 71         |
| Waterproof LED Luminaires            | 75         |
| <b>EcoSet</b>                        | <b>78</b>  |
| <b>Outdoor</b>                       | <b>82</b>  |
| Street Lights                        | 88         |
| Interact City                        | 94         |
| Flood Lights                         | 97         |
| Interact Sports                      | 104        |
| Landscape Lighting                   | 107        |
| Tunnel Lights                        | 115        |
| <b>Architectural Lighting</b>        | <b>116</b> |
| Uniflood                             | 123        |
| <b>Solar Lighting</b>                | <b>134</b> |
| <b>Lighting Controls</b>             | <b>140</b> |
| In-house Software Suite              | 140        |
| <b>LED Lamps</b>                     | <b>142</b> |





# Indoor Commercial

# ModiFly

An adventure in lighting design starts now

ModiFly is a specially designed luminaire to make offices look beautiful. The ultimate flexibility of joint connectors makes the customer achieve the desired look in the office, its innovative light guide design provides upward and downward light effect at the same time.

| Description               | ModiFly                                                                     |
|---------------------------|-----------------------------------------------------------------------------|
| Type                      | SP800P                                                                      |
| System lumen output       | L600 = max 1200lm<br>L1200mm = max 2000/4000lm<br>L1500mm = max 2500/4000lm |
| Voltage                   | 220-240v 50/60Hz                                                            |
| Efficacy                  | Max: 115lm/w                                                                |
| Power factor              | 0.9                                                                         |
| LED driver                | PSU/PSD                                                                     |
| SDCM                      | 4000/3000k <=3; 6500k <=5                                                   |
| CRI                       | 80/90                                                                       |
| Color temperature         | 4000k                                                                       |
| Materials and finishing   | Housing: Extra Aluminum                                                     |
| Lifetime                  | 50,000 hours                                                                |
| Working temperature range | -20°C < Ta < 40°C                                                           |
| Length                    | L600/1200/1500mm                                                            |
| Mounting type             | Suspended                                                                   |
| IP rating                 | IP20                                                                        |



## Flexibility

An endless array of patterns



## Distribution

Batwing distribution, allow the brilliance of your space to prevail



## Best-in-class Energy Efficiency

System Efficacy 115 Lm/W



Flexible connectors for endless shapes

## Suspended-Surface Mounted Luminaires

### ModiFly

This next generation lighting innovation has it all: contemporary form, infinite design freedom, and undisputed performance. ModiFly offers ultimate flexibility of host of joint connectors to make the customers achieve the desired looks in office. This innovative light guide design provides upward/downward light effect at the same time. Options of 2ft, 4ft and 5ft and up-down light distribution to meet the needs of the offices.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| SP800P LED21/840 L60W6 SD      | 9405     | 47,000/-  |
| SP800P LED41/840 L120W6 SD     | 9405     | 54,000/-  |
| SP800P LED52/840 L150W6 SD     | 9405     | 73,000/-  |
| SP800P LED21/840 L60W6 CD      | 9405     | 41,000/-  |
| SP800P LED41/840 L120W6 CD     | 9405     | 49,000/-  |
| SP800P LED52/840 L150W6 CD     | 9405     | 68,000/-  |
| SP800P LED20/940 L60W6 SD PSD  | 9405     | 53,000/-  |
| SP800P LED21/840 L60W6 SD PSD  | 9405     | 52,000/-  |
| SP800P LED38/940 L120W6 SD PSD | 9405     | 63,000/-  |
| SP800P LED41/840 L120W6 SD PSD | 9405     | 59,000/-  |
| SP800P LED52/840 L150W6 SD PSD | 9405     | 78,000/-  |
| SP800P LED21/840 L60W6 CD PSD  | 9405     | 46,000/-  |
| SP800P LED20/940 L60W6 CD PSD  | 9405     | 47,000/-  |
| SP800P LED41/840 L120W6 CD PSD | 9405     | 54,000/-  |
| SP800P LED38/940 L120W6 CD PSD | 9405     | 58,000/-  |
| SP800P LED52/840 L150W6 CD PSD | 9405     | 72,000/-  |

| Accessories                           |  |          |
|---------------------------------------|--|----------|
| SP800P Quad-link kit                  |  | 16,200/- |
| SP800P Tri-link kit                   |  | 12,400/- |
| SP800P Bi-link kit                    |  | 8,900/-  |
| SP800P singular link kit              |  | 4,600/-  |
| SP800P cont. installation end cap kit |  | 2,600/-  |
| SP800P suspension kit                 |  | 1,300/-  |

### FlatLine

FlatLine is a perfect blend of minimalism through its sleek design and maximalism through its wide profile making it apt for the newgen open and cell offices. FlatLine offers a host of options like office compliant version with special prismatic diffusers, options of 4ft and 8ft and up-down light distribution to meet the needs of the offices.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| SP570P LED26S 6500 PSU W12L120 OD SI | 9405     | 12,000/-  |
| SP570X LED22S 6500 PSU W12L120 OD SI | 9405     | 12,000/-  |
| SP570P LED26S 6500 PSU W12L120 OC SI | 9405     | 13,000/-  |
| SP570X LED22S 6500 PSU W12L120 OC SI | 9405     | 13,000/-  |
| SP571P LED33S 6500 PSU W12L120 OD SI | 9405     | 14,000/-  |
| SP571X LED27S 6500 PSU W12L120 OD SI | 9405     | 14,000/-  |
| SP571P LED33S 6500 PSU W12L120 OC SI | 9405     | 15,000/-  |
| SP571X LED27S 6500 PSU W12L120 OC SI | 9405     | 15,000/-  |
| SP570P LED52S 6500 PSU W12L240 OD SI | 9405     | 24,000/-  |
| SP570X LED44S 6500 PSU W12L240 OD SI | 9405     | 23,000/-  |
| SP570P LED52S 6500 PSU W12L240 OC SI | 9405     | 24,000/-  |
| SP570X LED44S 6500 PSU W12L240 OC SI | 9405     | 24,000/-  |
| SP571P LED66S 6500 PSU W12L240 OD SI | 9405     | 28,000/-  |
| SP571X LED54S 6500 PSU W12L240 OD SI | 9405     | 27,000/-  |
| SP571P LED66S 6500 PSU W12L240 OC SI | 9405     | 29,000/-  |
| SP571X LED54S 6500 PSU W12L240 OC SI | 9405     | 29,000/-  |

| Accessories       |  |         |
|-------------------|--|---------|
| Down End Cap      |  | 500/-   |
| Up-Down End Cap   |  | 600/-   |
| Suspension Kit    |  | 600/-   |
| Joining Bracket   |  | 600/-   |
| Single Driver Box |  | 700/-   |
| Double Driver Box |  | 1,400/- |

CCT Options 4000K and 6500K. Also available in DALI option (At additional INR 3000/- for 4ft and INR 5000/- for 8ft on MRP).

# GlazeLine

## Enhance your office interiors

GlazeLine is a deep recessed luminaire designed for employee comfort without compromising the efficacy. It is highly flexible to sync the office themes.

| Description           | GlazeLine                                        |            |
|-----------------------|--------------------------------------------------|------------|
| Width (mm)            | 65                                               |            |
| Height (mm)           | 100-110                                          |            |
| Distribution          | down& Up/down                                    |            |
| Length (ft)           | 4/8ft & 2/3/5/6ft*                               |            |
| Type                  | Integrated/non-integrated                        |            |
| Standalone/Continuous | Standalone                                       | Continuous |
| Lumen down            | 2600                                             | 2200       |
| Lumen up/down         | 3300                                             | 2700       |
| optics down           | Opaque/Prismatic                                 |            |
| optics UP             | Opaque/wide*                                     |            |
| Ratio (up/down)       | 30/70 ,50/50* , 70/30*                           |            |
| Efficacy              | OD>110 , Prismatic >100                          |            |
| CCT                   | 4000/5700/6500                                   |            |
| CRI                   | 80,90                                            |            |
| Operating voltage     | 140-270V                                         |            |
| Driver specs MS       | THD<10%, 3.5 KV surge                            |            |
| Driver specs ETO      | THD<10%, EMC/EMI complaint,4 KV surge, Ripple<5% |            |
| Driver mounting       | Integral                                         |            |
| Loop in/loop out      | Yes                                              |            |
| Life                  | 50K burning hours                                |            |
| Control               | PSU/PSD/IA/TW*                                   |            |



### Employee Comfort

Deep recessed  
prismatic Optics



### Best-in-class Energy Efficiency

System Efficacy 115 Lm/W



### Sync Office Themes

Customizable interior and  
exteriors of the luminaire





## GlazeLine

GlazeLine is a deep recessed luminaire designed for employee comfort without compromising the efficacy. Product is highly flexible to sync the office themes. Modify offers down, upward/downward light effect at the same time to meet the needs of the offices.



| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| SP790P I LED28S 865 PSU W6L120 OC WH    | 9405     | 13,800/-  |
| SP790X I LED22S 865 PSU W6L120 OC WH    | 9405     | 13,600/-  |
| SP790P N LED28S 865 PSU W6L120 OC SI WH | 9405     | 14,000/-  |
| SP790X N LED22S 865 PSU W6L120 OC SI WH | 9405     | 13,800/-  |
| SP791P I LED33S 865 PSU W6L120 OC WH    | 9405     | 15,000/-  |
| SP791X I LED27S 865 PSU W6L120 OC WH    | 9405     | 14,800/-  |
| SP791P N LED33S 865 PSU W6L120 OC SI WH | 9405     | 15,500/-  |
| SP791X N LED27S 865 PSU W6L120 OC SI WH | 9405     | 15,200/-  |

| Accessories        |  |       |
|--------------------|--|-------|
| SP790 I EP60 WH    |  | 400/- |
| SP790 I EP60 BK    |  | 400/- |
| SP790 N EP60 SI WH |  | 400/- |
| SP790 N EP60 RG BK |  | 400/- |
| SP790 N EP60 SI BK |  | 400/- |

CCT Options 4000K, 5700K, available in 8Ft and DALI option  
 790P: Down Version, 791P: Up- Down  
 P: Standalone, X: Continuous, I: Integrated  
 N: Non Integrated, OC: Prismatic Diffuser  
 OD: Opal Diffuser



## Green -Up Linear

Green-Up Linear is a slim body linear luminaire with options of surface and suspended mountings. Luminaires comes with variable lengths and options of wide and medium beam optics meeting various applications of focus lighting over the desks, passages and display lighting for retail stores.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| SP308P P22/865 L75W3 PSU WB WH  | 9405     | 9,000/-   |
| SP308P P22/865 L75W3 PSU MB WH  | 9405     | 9,000/-   |
| SP308P P30/865 L120W3 PSU WB WH | 9405     | 11,800/-  |
| SP308P P30/865 L120W3 PSU MB WH | 9405     | 11,800/-  |
| SP308P P38/865 L140W3 PSU WB WH | 9405     | 13,400/-  |
| SP308P P38/865 L140W3 PSU MB WH | 9405     | 13,400/-  |
| SP308P P45/865 L170W3 PSU WB WH | 9405     | 14,400/-  |
| SP308P P45/865 L170W3 PSU MB WH | 9405     | 14,400/-  |
| SM308C P22/865 L75W3 PSU WB WH  | 9405     | 7,600/-   |
| SM308C P22/865 L75W3 PSU MB WH  | 9405     | 7,600/-   |
| SM308C P30/865 L120W3 PSU WB WH | 9405     | 10,200/-  |
| SM308C P30/865 L120W3 PSU MB WH | 9405     | 10,200/-  |
| SM308C P38/865 L140W3 PSU WB WH | 9405     | 11,800/-  |
| SM308C P38/865 L140W3 PSU MB WH | 9405     | 11,800/-  |
| SM308C P45/865 L170W3 PSU WB WH | 9405     | 12,800/-  |
| SM308C P45/865 L170W3 PSU MB WH | 9405     | 12,800/-  |

CCT Options 4000K, 3000K

P: Standalone

C: Surface Mounted

SP: Suspended

SM: Surface Mounted

# PureLine Horizon

## Guiding the path through light

PureLine Horizon is a specially designed luminaire for volumetric lighting for closed office areas and guiding paths for corridors, walkaways in the office environment.

| Description           | PureLine Horizon                                  |            |
|-----------------------|---------------------------------------------------|------------|
| Width (mm)            | 50                                                |            |
| Height (mm)           | 100-110                                           |            |
| Distribution          | down                                              |            |
| Length (ft)           | 4/8ft & 2/3/5/6ft*                                |            |
| Standalone/Continuous | Standalone                                        | Continuous |
| Lumen down            | 2600                                              | 2200       |
| optics down           | Drop down                                         |            |
| Efficacy              | 150 lum/w                                         |            |
| CCT                   | 4000/5700/6500                                    |            |
| CRI                   | 80,90(ETO)                                        |            |
| Operating voltage     | 140-270V                                          |            |
| Driver specs          | THD<10%, 3.5 KV surge                             |            |
| Driver specs ETO      | THD<10%, EMC/EMI complaint, 4 KV surge, Ripple<5% |            |
| Driver mounting       | Integral                                          |            |
| Loop in/loop out      | Yes                                               |            |
| Life                  | 50K burning hours                                 |            |
| Control               | PSU/PSD                                           |            |



### Best-in-class Energy Efficiency

System Efficacy 150 Lm/W



### Volumetric Lighting

Better vertical illumination



## PureLine Horizon

PureLine Horizon is a specially designed luminaire for volumetric lighting with a path breaking system efficacy for closed office areas and guiding paths for corridors, walkways in the office environment.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| SP783P LED28S 865 PSU W5L120 OD WH | 9405     | 9,400/-   |
| SP783P LED33S 865 PSU W5L120 OD WH | 9405     | 10,000/-  |
| SP783P LED56S 865 PSU W5L240 OD WH | 9405     | 18,800/-  |
| SP783P LED66S 865 PSU W5L240 OD WH | 9405     | 20,400/-  |
| OD: Opal Diffuser                  |          |           |
| CCT Options 4000K, 5700K           |          |           |
| Also available in DALI option      |          |           |

## PureLine Pixel

PureLine Pixel is a slim profile luminaire, offering sleek and modern aesthetics for office environment. Luminaire is designed with advance lense for achieving volumetric lighting on vertical surfaces and also have an option of asymmetric distribution for wall grazing applications.




| Type                                                                                                        | HSN Code | MRP (INR) |
|-------------------------------------------------------------------------------------------------------------|----------|-----------|
| SP683P LED18S-857 PSU W4L106 AS BK                                                                          | 9405     | 11,200/-  |
| SP683X LED18S-857 PSU W4L106 AS BK                                                                          | 9405     | 11,000/-  |
| SP683P LED22S-857 PSU W4L106 R24 BK                                                                         | 9405     | 11,000/-  |
| SP683X LED22S-857 PSU W4L106 R24 BK                                                                         | 9405     | 10,800/-  |
| SP683P LED22S-857 PSU W4L106 S50 BK                                                                         | 9405     | 11,000/-  |
| SP683X LED22S-857 PSU W4L106 S50 BK                                                                         | 9405     | 10,800/-  |
| SP683 EP40 Black                                                                                            | 9405     | 400/-     |
| P: Standalone, X: Continous, R24: Round 24 Deg, S50: Square 50X50, AS: Asymmetric, CCT Options 4000K, 3000K |          |           |

Available in 8ft and DALI, Option of White Housing on request Recessed Options available on request.



## DaySpace Suspended

DaySpace is a unique 2'X2' LED luminaire suitable suspended mounting. With options of using the back plate of users choice the fixture seamlessly blends into the office environment/ architecture and also declutters the ceiling with its unique design. DaySpace increases the perceived volume of a space, this luminaire is also ideal for lower ceilings and smaller spaces such as private offices and break out areas.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| SP740B LED30S/865 W60L60 PSU WH | 9405     | 18,000/-  |
| SP740B LED36S/865 W60L60 PSU WH | 9405     | 19,000/-  |

BP740 L60W60 WH - White back plate as an optional additional accessory. CCT Options 4000K, 5700K and 6500K. Also available in DALI option

# PureLine Perfect Multiple Formations

## Linearity with continuity

PureLine Perfect is an aluminum extruded linear fixtures to align the linear lighting layout with the office architecture or create playful environments with shapes like L,Y,T & + etc. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.

| Description        | PureLine Perfect Formations       |
|--------------------|-----------------------------------|
| System Lumen       | 1200/2200/2600 Lm( per 1.2 Meter) |
| Type               | Standalone/Continuous             |
| Width(mm)          | 50mm                              |
| Diffuser           | Opal diffuser/Prismatic           |
| Efficacy           | >120 Lm/Watt                      |
| Light distribution | Down                              |
| End Cap            | PDC                               |
| Housing            | Extruded Aluminum, H-section      |
| SDCM               | <5                                |
| CCT                | 6500K/4000K/5700                  |
| CRI                | >80                               |
| Finish             | WH                                |
| Surge              | 4 KV                              |
| voltage            | 140-270                           |
| Ripple             | < 5 %                             |
| EMI/EMC            | compliant                         |
| Driver             | PSU                               |
| Serviceability     | Class B                           |
| Power factor       | >.95                              |
| IP, IK             | IP 20, IK02                       |
| LILO connector     | Yes                               |
| THD                | <10%                              |
| Life expectancy    | L70B50 @ 50K @45 deg              |
| Mounting type      | Suspension/Conduit mounting       |



### Multiple Formation

Multiple array of patterns  
for different zones



### Best-in-class Energy Efficiency

System Efficacy 120 Lm/W



### Employee Comfort

Option of prismatic diffuser





## PureLine Perfect Nex Gen

Philips PureLine Perfect is a revolutionary innovation in 50mm linear lighting which offers unmatched ease of installation, easiest maintenance and the longest lasting linearity in the industry - making Philips PureLine Perfect a lighting solution with distinction. Available in 2ft, 4ft, 6ft & 8ft.



| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| SP780 H LED25S-6500 PSU W5L112 OD S1 WH | 9405     | 6,400/-   |
| SP780 H LED22S-6500 PSU W5L112 OD S1 WH | 9405     | 6,200/-   |
| SP780 H LED50S-6500 PSU W5L224 OD S1 WH | 9405     | 11,400/-  |
| SP780 H LED44S-6500 PSU W5L224 OD S1 WH | 9405     | 11,000/-  |

CCT Options 4000K, 5700 & 6500K. Also available in DALI option. Diffuser Options available in Opal (OD) and prismatic (OC). Cut sheet, Snapfit and Rollon options available for Diffusers.

## PureLine Perfect Formations

Suspended 50mm aluminium extruded linear fixtures to align the linear lighting layout with the office architecture or create playful environment with shapes like Y, L, T & + etc. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



| Type                                       | HSN Code | MRP (INR) |
|--------------------------------------------|----------|-----------|
| SP780 HS LED23S/865 PSU W5 OC WH L CONN    | 9405     | 12,800/-  |
| SP780 HS LED23S/865 PSU W5 OC WH PLUS CONN | 9405     | 18,600/-  |
| SP780 HS LED23S/865 PSU W5 OC WH T CONN    | 9405     | 17,400/-  |
| SP780 HS LED35S/865 PSU W5 OC WH Y CONN    | 9405     | 20,600/-  |

CCT Options 4000K, 5700K and 6500K. Also available in DALI option. Diffuser options available in Opal (OD) and prismatic (OC). Cut sheet, Snapfit and Rollon options available for diffusers.

## PureLine Perfect Flare

PureLine Perfect is an elegant suspended lighting solution having Variable Lighting O/P ratio for upward and downward direction. The upward light O/P is designed with wide distribution >160°, available in 4ft and 8ft.



| Type                                       | HSN Code | MRP (INR) |
|--------------------------------------------|----------|-----------|
| SP781X HW LED33S/857 PSU W5L112 OC U3D7 WH | 9405     | 12,800/-  |
| SP781X HW LED27S/857 PSU W5L112 OC U3D7 WH | 9405     | 12,400/-  |
| SP781X HW LED33S/857 PSU W5L112 OC U7D3 WH | 9405     | 12,600/-  |
| SP781X HW LED27S/857 PSU W5L112 OC U7D3 WH | 9405     | 12,400/-  |

CCT Options 4000K, 5700. Also available in DALI option

## PureLine Perfect Nex Gen Variable Ratio

PureLine Perfect Nex Gen Variable Ratio is an elegant suspended lighting solution having direct and indirect lighting distributions with percentage of up/down ratio.



| Type                                       | HSN Code | MRP (INR) |
|--------------------------------------------|----------|-----------|
| SP781X HW LED33S/857 PSU W5L112 OC U3D7 WH | 9405     | 11,200/-  |
| SP781X HW LED27S/857 PSU W5L112 OC U3D7 WH | 9405     | 11,000/-  |
| SP781X HW LED33S/857 PSU W5L112 OC U7D3 WH | 9405     | 20,000/-  |
| SP781X HW LED27S/857 PSU W5L112 OC U7D3 WH | 9405     | 20,000/-  |

CCT Options 4000K, 5700K and 6500K.

## PureLine Slim Nex Gen

Suspended 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths, RAL colours (MOQ shall be applicable) and lumen packages for different application to choose from.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| SP780P LED26S-6500 PSU W5L113 OD WH-S1 | 9405     | 6,400/-   |
| SP780X LED22S-6500 PSU W5L113 OD WH-S1 | 9405     | 6,200/-   |
| SP780P LED52S-6500 PSU W5L226 OD WH-S1 | 9405     | 11,400/-  |
| SP780X LED44S-6500 PSU W5L226 OD WH-S1 | 9405     | 11,000/-  |

CCT Options 4000K, 5700K and 6500K, Also available in DALI option

## PureLine Slim Connectors & Decorative Shapes 50mm

Suspended 50mm aluminium extruded linear fixtures to align the linear lighting layout with the office architecture or create playful environments with shapes like square, hexagon, etc. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| SP780P LED66S-6500 PSU W5 OD WH HX CONN | 9405     | 27,000/-  |
| SP780P LED48S-6500 PSU W5 OD WH X CONN  | 9405     | 19,250/-  |
| SP780P LED44S-6500 PSU W5 OD WH SQ CONN | 9405     | 16,000/-  |
| SP780X LED48S-6500 PSU W5 OD WH + CONN  | 9405     | 24,500/-  |
| SP780P LED36S-6500 PSU W5 OD WH Y CONN  | 9405     | 20,000/-  |
| SP780X LED36S-6500 PSU W5 OD WH T CONN  | 9405     | 18,000/-  |
| SP780X LED24S-6500 PSU W5 OD WH L CONN  | 9405     | 14,000/-  |

CCT Options 4000K and 6500K. Also available in DALI option. Diffuser Options available in Opal (OD) and prismatic (OC). Cut sheet, Snapfit and Rollon options available for diffusers.

## Smart Bright Linear GEN 2

SmartBright Linear Gen2 provides an Efficient, aesthetic 50mm extremely durable with aluminium extruded housing with suitability for stand alone & continuous version using joining kits for rapid installation. Suitable for applications like offices, retail stores, metro stations, etc.



| Type                                | HSN Code | MRP (INR) |
|-------------------------------------|----------|-----------|
| SP170P LED25S-6500 PSU W5L113 OD WH | 9405     | 8,000/-   |
| SP170P LED50S-6500 PSU W5L226 OD WH | 9405     | 14,000/-  |
| SP170 W50 AC JB                     | -        | -         |

CCT Options 4000K

## SmartBright Surface

Low height general purpose suspended/surface mounted LED luminaire with diffused optics offering perfect illumination for indoor space.



| Type                       | HSN Code | MRP (INR) |
|----------------------------|----------|-----------|
| SM270C LED 30S 6500 PSU WH | 9405     | 5,500/-   |
| SM270C LED 30S 4000 PSU WH | 9405     | 5,500/-   |

## SmartBright Linear

SmartBright Linear provides an extremely durable and high efficacy yet cost effective linear solution surface mounted and suspended applications like offices, retail stores, metro stations, etc.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| SP095V LED40S 865 W7L120 PSU WH S1 | 9405     | 6,000/-   |
| SP095V LED26S 865 W7L120 PSU WH S1 | 9405     | 5,500/-   |

CCT Options 4000K & 6500K

## Full Glow Surface Mount-SM367

Surface mounted general purpose square shaped luminaire with low height CRCA housing and high transmissivity diffuser suitable for office application.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| SM367 LED25S-6500 G6 L54W54 PSU OD | 9405     | 7,600/-   |
| SM367 LED30S-6500 G6 L54W54 PSU OD | 9405     | 7,800/-   |
| SM367 LED36S-6500 G6 L54W54 PSU OD | 9405     | 8,000/-   |
| SM367 LED42S-6500 G6 L54W54 PSU OD | 9405     | 8,200/-   |

CCT Options 4000K and 5700K.

## Recessed Mounted Luminaires

### DaySpace Recessed

DaySpace is a unique 2'X2' LED luminaire suitable for grid ceiling. With options of using the false ceiling tile or back plate of users choice the fixture seamlessly blends into the office environment/architecture and also declutters the ceiling with its unique design.




| Type                        | HSN Code | MRP (INR) |
|-----------------------------|----------|-----------|
| RC740B LED30S/865 W60L60 WH | 9405     | 14,500/-  |
| RC740B LED36S/865 W60L60 WH | 9405     | 15,500/-  |

BP740 L60W60 WH - White back plate as an optional additional accessory. CCT Options 4000K, 5700K and 6500K. Also available in DALI option.

### PowerBalance

PowerBalance exceeds the basic requirements for offices, as prescribed in the global workplace requirements. By balancing horizontal and vertical brightness and combining it with a low glare, PowerBalance creates an attractive environment in which both the entire space, plus the individual workspaces are perfectly lit.



| Type                                | HSN Code | MRP (INR) |
|-------------------------------------|----------|-----------|
| RC600B M LED25S-6500 PSU W30L120 WH | 9405     | 11,500/-  |
| RC600B M LED30S-6500 PSU W30L120 WH | 9405     | 12,000/-  |
| RC600B M LED40S-6500 PSU W30L120 WH | 9405     | 12,500/-  |
| RC600B M LED25S-6500 PSU W60L60 WH  | 9405     | 10,500/-  |
| RC600B M LED30S-6500 PSU W60L60 WH  | 9405     | 11,000/-  |
| RC600B M LED40S-6500 PSU W60L60 WH  | 9405     | 11,500/-  |

CCT Options 4000K and 6500K. Also available in DALI option. IAO options also available on request.



## WingLine

Recessed mounted general purpose square shaped luminaire with high transmittivity diffuser suitable for office application. Available in options of white & grey housing with profiled & flat diffuser.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| RC480B LED30S/865 W60L60 PSU WH | 9405     | 4,800/-   |

CCT Options 4000K and 6500K. Also available in DALI option. IAO options also available on request.

## FullGlow G6

FullGlow G6 comes with an all new deep drawn housing general illumination applications. Our carefully designed driver with THD < 10%. FullGlow G6 also comes with a long service life and almost complete freedom from maintenance significantly reduce operating costs.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| RC380B LED25S-6500 G6 L60W60 PSU OD S1 | 9405     | 4,000/-   |
| RC380B LED30S-6500 G6 L60W60 PSU OD S1 | 9405     | 4,400/-   |
| RC380B LED36S-6500 G6 L60W60 PSU OD S1 | 9405     | 4,800/-   |
| RC380B LED42S-6500 G6 L60W60 PSU OD S1 | 9405     | 5,200/-   |

CCT Options 4000K, 5700K and 6500K. Also available in DALI option. Also Available in Prismatic Diffuser (Office Compliant). Interact Office and Interact Pro options also available on request.

## SmartGlow

SmartGlow is an intelligent office lighting recessed luminaire with built in PIR occupancy sensor offering flexibility of auto switching off when the space is not occupied.



| Type                                     | HSN Code | MRP (INR) |
|------------------------------------------|----------|-----------|
| RC383B P LED 36S-6500 G6 PSU OD WH PIR P | 9405     | 6,000/-   |



## PureLine TechZone G2

PureLine TechZone is offered in two versions suitable for 150mm & 100mm technical zones. Sturdy extruded aluminium housing with sliding PC diffuser offering uniform lighting distribution. CRCA endcaps and external gear for ease of maintenance.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| RC810B LED26S 6500 PSU W10L120 OD WH | 9405     | 7,900/-   |
| RC810B LED30S 6500 PSU W10L120 OD WH | 9405     | 7,900/-   |
| RC810X LED20S 6500 PSU W10L120 OD WH | 9405     | 7,900/-   |
| RC810B LED52S 6500 PSU W10L240 OD WH | 9405     | 15,300/-  |
| RC810X LED40S 6500 PSU W10L240 OD WH | 9405     | 15,800/-  |
| RC810B LED26S 6500 PSU W15L120 OD WH | 9405     | 9,100/-   |
| RC810B LED30S 6500 PSU W15L120 OD WH | 9405     | 9,100/-   |
| RC810X LED20S 6500 PSU W15L120 OD WH | 9405     | 9,100/-   |
| RC810B LED52S 6500 PSU W15L240 OD WH | 9405     | 18,200/-  |
| RC810X LED40S 6500 PSU W15L240 OD WH | 9405     | 18,500/-  |

### Accessories

|                    |       |
|--------------------|-------|
| RC810 W10 Endplate | 250/- |
| RC810 W15 Endplate | 350/- |

CCT Options 4000K and 6500K. Also available in DALI option. Interact Office and Interact Pro options also available on request.

## PureLine Slim Recessed 50mm

Recessed mounted 50mm aluminium extruded linear lighting luminaires with superior white powder coated finish. Multiple options of light distribution, run lengths and lumen packages for different application to choose from.



| Type                                | HSN Code | MRP (INR) |
|-------------------------------------|----------|-----------|
| RC780X LED12S-6500 PSU W5L56 OD WH  | 9405     | 4,800/-   |
| RC780B LED26S-6500 PSU W5L113 OD WH | 9405     | 7,800/-   |
| RC780X LED22S-6500 PSU W5L113 OD WH | 9405     | 7,600/-   |
| RC780X LED26S-6500 PSU W5L113 OD WH | 9405     | 7,700/-   |
| RC780X LED44S-6500 PSU W5L226 OD WH | 9405     | 14,600/-  |
| RC780X LED52S-6500 PSU W5L226 OD WH | 9405     | 14,700/-  |
| RC780B LED52S-6500 PSU W5L226 OD WH | 9405     | 15,000/-  |

CCT Options 4000K. Also available in DALI option. Interact Office and Interact Pro options also available on request.

## Recessed Troffer G6

Fully diffused recessed mounted 2'X2' LED luminaire with high transmittive diffuser suitable for indoor spaces.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| RC370B LED30S-6500 G6 L60W60 PSU OD V3 | 9405     | 4,200/-   |
| RC370B LED36S-6500 G6 L60W60 PSU OD V3 | 9405     | 4,500/-   |

CCT Options 4000K, 5700K and 6500K. Also Available in Prismatic Diifuser (Office Compliant).

## FullGlow 1'x4'

Fully diffused recessed mounted 1'X4' LED luminaire with high transmittive diffuser suitable for indoor spaces with CRI 80 and multiple lumen packs.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| RC380B LED30S-6500 G5 L12W3 PSU OD | 9405     | 6,500/-   |
| RC380B LED36S-6500 G5 L12W3 PSU OD | 9405     | 7,500/-   |
| RC380B LED43S-6500 G5 L12W3 PSU OD | 9405     | 8,500/-   |

CCT Options 4000K. Also available in DALI option. Also Available in Prismatic Diifuser (Office Compliant). Interact Office and Interact Pro options also available on request

## Commercial Battens

### SmartBright Xtra S4

Industrial Batten SmartBrite BN100 S4 expands the application scope of BN100 Batten family with upgraded specification and additional features ensuring sustained lighting performance in harsh conditions. This all new S4 version is available in IP40 ingress rating and THD<10%.



| Type                              | HSN Code | MRP (INR) |
|-----------------------------------|----------|-----------|
| BN100C LED40S-6500 PSU L120 GR S4 | 9405     | 2,500/-   |
| BN100C LED20S-6500 PSU L120 GR S4 | 9405     | 2,400/-   |

CCT Options 4000K and 6500K

### Essential SmartBright Batten

Essential SmartBright is a light weight and screw-less linear batten with high efficacy for modern commercial applications. The luminaire comprises of extruded aluminum housing offering superior finish, long life and high transitivity polycarbonate diffuser resulting in high efficacy and uniform lighting. The same is also available in IP40 version on request.



| Type                        | HSN Code | MRP (INR) |
|-----------------------------|----------|-----------|
| BN170C LED40S-6500 PSU L120 | 9405     | 1,700/-   |
| BN170C LED20S-6500 PSU L120 | 9405     | 1,100/-   |

CCT Options 4000K and 6500K

### Essential Smartbright MW

Essential SmartBright MW batten is an Intelligent Standalone solution with micro wave sensors for movement detection. With factory set dimming profiles of 50% and 100%, light dims to these levels in case occupancy is not detected.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| BN170C LED40S-6500 MW D50 L120 S1 L1 | 9405     | 2,200/-   |
| BN170C LED40S-6500 MW D0 L120 S1 L1  | 9405     | 2,200/-   |
| BN170C LED20S-6500 MW D50 L120 S1 L1 | 9405     | 1,800/-   |
| BN170C LED20S-6500 MW D0 L120 S1 L1  | 9405     | 1,800/-   |

CCT Options 4000K and 6500K

## Downlights & Spotlights

### LuxSpace Pro

LuxSpace Pro is a deep recessed downlight range with extremely low glare and high quality faceted reflector for superior lighting and aesthetics. The range is available in medium beam and wide beam optics for both standard and high ceiling applications.



| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| DN590B LED6S-6500 PSU WH  | 9405     | 7,000/-   |
| DN590B LED10S-6500 PSU WH | 9405     | 7,200/-   |
| DN590B LED15S-6500 PSU WH | 9405     | 9,800/-   |
| DN590B LED20S-6500 PSU WH | 9405     | 10,000/-  |

CCT Options - 5700K, 4000K, 3000K. Beam Angle Option: MB and WB. Available in Dali also at additional cost

### GreenPerform Sleek

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| DN295B LED6S-6500 PSU WH  | 9405     | 1,400/-   |
| DN295B LED10S-6500 PSU WH | 9405     | 1,700/-   |
| DN296B LED12S-6500 PSU WH | 9405     | 2,100/-   |
| DN296B LED15S-6500 PSU WH | 9405     | 2,500/-   |
| DN296B LED20S-6500 PSU WH | 9405     | 3,000/-   |

CCT options: 4000K, 5700K, 3000K. Available in DALI also At INR 3500/- additional on fixed output (PSU) MRP. Office compliant variant with UGR<19 - Soft Glow (SG). (MRP~INR 500/- additional for SG option).



## GreenPerform Sleek G2

GreenPerform Sleek is a high performance low-height LED downlighter suited for requirements of any modern professional workspace. Robust PDC housing ensures long system. Narrow rim renders a pleasing aesthetic look.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| DN295B LED6S-6500 PSE WH S2  | 9405     | 1,100/-   |
| DN295B LED10S-6500 PSE WH S2 | 9405     | 1,250/-   |
| DN296B LED12S-6500 PSE WH S2 | 9405     | 1,600/-   |
| DN296B LED15S-6500 PSE WH S2 | 9405     | 2,200/-   |
| DN296B LED20S-6500 PSE WH S2 | 9405     | 2,600/-   |

CCT options: 4000K, 5700K, 3000K.

## GreenPerform Dusk

A deep recessed downlight for comfort on eye suitable for versatile applications such as offices, retail, hospitality etc. The product has minimal aesthetic with the narrow rim which makes it a beautiful choice for all kind interior.



| Type                     | HSN Code | MRP (INR) |
|--------------------------|----------|-----------|
| DN495 LED6S-6500 PSU WH  | 9405     | 1,800/-   |
| DN495 LED10S-6500 PSU WH | 9405     | 1,800/-   |
| DN496 LED12S-6500 PSU WH | 9405     | 2,100/-   |
| DN496 LED15S-6500 PSU WH | 9405     | 2,100/-   |
| DN496 LED20S-6500 PSU WH | 9405     | 2,100/-   |

CCT Options - 4000K, 3000K

## Sleek Surface Pro

Sleek Surface Pro is a rugged yet stylish metal surface mounted downlighter suitable for different open ceiling applications. Wide range of lumen packs and CCTs make it suitable for most of the indoor applications.



| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| SM295C LED 6S-6500 PSU WH | 9405     | 1,700/-   |
| SM295C LED10S-6500 PSU WH | 9405     | 1,800/-   |
| SM296C LED12S-6500 PSU WH | 9405     | 2,200/-   |
| SM296C LED15S-6500 PSU WH | 9405     | 2,300/-   |
| SM296C LED20S-6500 PSU WH | 9405     | 2,400/-   |

CCT Options - 4000K, 3000K

## Sleek Surface

Slim profile sophisticated surface mounted downlight with option of 700 to 2000 lumen for multipurpose applications.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| SM250/260 LED7S 6500 PSU WH  | 9405     | 1,100/-   |
| SM250/260 LED12S 6500 PSU WH | 9405     | 1,200/-   |
| SM251/261 LED16S 6500 PSU WH | 9405     | 1,750/-   |
| SM251/261 LED20S 6500 PSU WH | 9405     | 1,950/-   |

CCT Options - 4000K, 3000K. SM250/251 refers to round form factor. SM260/261 refers to square form factor.

## ArchSpace

ArchSpace is the perfect choice when it comes to surface and suspended cylindrical downlighting applications such as those in retail, offices, hotels, lobbies and school/universities etc. With its differentiated aesthetics of extruded aluminium housing and a superior powder coated finish, multiple choices of lumen packs, two diameters, flexible height\*, uniform lighting distribution and superior features of driver make archSpace an undisputed winner when it comes to the surface/cylindrical downlight category.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| SP320P LED20S-6500 PSU NB DIA100 WH  | 9405     | 4,800/-   |
| SP320P LED15S-6500 PSU NB DIA100 WH  | 9405     | 4,600/-   |
| SP320P LED10S-6500 PSU ENB DIA100 WH | 9405     | 4,300/-   |
| SP320P LED6S-6500 PSU ENB DIA100 WH  | 9405     | 4,100/-   |
| SP320P LED20S-6500 PSU NB DIA80 WH   | 9405     | 4,600/-   |
| SP320P LED15S-6500 PSU NB DIA80 WH   | 9405     | 4,300/-   |
| SP320P LED10S-6500 PSU ENB DIA80 WH  | 9405     | 4,100/-   |
| SP320P LED6S-6500 PSU ENB DIA80 WH   | 9405     | 3,800/-   |

Available in black housing at same MRP. CCT Option available in 3000, 4000.



### ArchSpace Pro

ArchSpace Pro comes with huge benefits such as differentiated aesthetics, multiple choices of lumen packs, 3 types of optical distribution suitable for different applications, both surface and suspended mounting options and power packed by superior performance features like 50K burning hours, THD<10%, Dali dimmable option and EMI/EMC compliance, which make the product robust and reliable for all kind of projects.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| SP321P LED20S-5700 PSU NB DIA100 WH  | 9405     | 6,000/-   |
| SP321P LED15S-5700 PSU NB DIA100 WH  | 9405     | 5,800/-   |
| SP321P LED10S-5700 PSU ENB DIA100 WH | 9405     | 5,600/-   |
| SM321P LED20S-5700 PSU NB DIA100 WH  | 9405     | 6,000/-   |
| SM321P LED15S-5700 PSU NB DIA100 WH  | 9405     | 5,800/-   |
| SM321P LED10S-5700 PSU ENB DIA100 WH | 9405     | 5,600/-   |

CCT Options of 3000K, 4000K & 5700K. DALI Option at INR 4800 extra on MRP for fixed Output. Beam Angle options of 24°, 36°, 60°

## Track & Spotlights

### GreenSpace Flex

GreenSpace Flex is a modular range of downlights, with extremely low glare. The range is available in narrow beam (15°), medium beam (24°) and wide beam (38°) optics, suitable for different applications & ceiling heights.



| Type                      | Trims | HSN Code | MRP (INR) |
|---------------------------|-------|----------|-----------|
| RS378Z M102 D150 S-S AJ D |       | 9405     | 6,000/-   |
| RS378Z M102 D150 R-R FX D |       | 9405     | 6,000/-   |
| RS378Z M102 D150 R-R AJ D |       | 9405     | 6,000/-   |
| RS378Z M87 D130 R-R AJ D  |       | 9405     | 4,000/-   |
| RS378Z M87 D130 R-R AJ    |       | 9405     | 3,700/-   |
| RS378Z M87 D125 S-S AJ D  |       | 9405     | 5,000/-   |
| RS378Z M87 D125 R-R FX D  |       | 9405     | 5,000/-   |
| RS378Z M87 D125 R-R AJ D  |       | 9405     | 5,000/-   |
| RS378Z M87 D115 S-R AJ    |       | 9405     | 4,000/-   |
| RS378Z M87 D115 R-R AJ    |       | 9405     | 4,000/-   |
| RS378Z M87 D110 R-R FX D  |       | 9405     | 2,700/-   |
| RS378Z M70 D110 R-R AJ D  |       | 9405     | 3,400/-   |
| RS378Z M70 D110 R-R AJ    |       | 9405     | 3,200/-   |
| RS378Z M55 D102 R-R FX D  |       | 9405     | 3,600/-   |
| RS378Z M55 D102 R-R AJ D  |       | 9405     | 3,600/-   |
| RS378Z M70 D95 S-R AJ     |       | 9405     | 3,000/-   |
| RS378Z M55 D95 R-R AJ D   |       | 9405     | 2,600/-   |
| RS378Z M55 D95 R-R AJ     |       | 9405     | 2,500/-   |
| RS378Z M70 D90 R-R FX D   |       | 9405     | 2,000/-   |
| RS378Z M55 D90 S-R AJ     |       | 9405     | 2,000/-   |
| RS378Z M55 D90 R-R AJ     |       | 9405     | 2,000/-   |
| RS378Z M70 D100 S-S AJ D  |       | 9405     | 5,000/-   |
| RS378Z M70 D100 R-R FX D  |       | 9405     | 4,000/-   |
| RS378Z M70 D100 R-R AJ D  |       | 9405     | 4,000/-   |
| RS378Z M55 D92 R-R FX D   |       | 9405     | 3,200/-   |
| RS378Z M55 D92 R-R AJ D   |       | 9405     | 3,200/-   |
| RS378Z M55 D85 R-R AJ     |       | 9405     | 2,300/-   |
| RS378Z M55 D80 S-R AJ     |       | 9405     | 3,000/-   |

Also available in 4000K

| Type                    | Trims | HSN Code | MRP (INR) |
|-------------------------|-------|----------|-----------|
| RS378Z M55 D80 R-R AJ   |       | 9405     | 3,000/-   |
| RS378Z M55 D78 S-S AJ D |       | 9405     | 2,800/-   |
| RS378Z M55 D78 R-R FX D |       | 9405     | 2,900/-   |
| RS378Z M55 D78 R-R AJ D |       | 9405     | 2,800/-   |
| RS378Z M55 D75 S-U AJ   |       | 9405     | 1,600/-   |
| RS378Z M55 D75 S-S FX   |       | 9405     | 1,600/-   |
| RS378Z M55 D75 R-U AJ   |       | 9405     | 1,600/-   |
| RS378Z M55 D75 R-R FX   |       | 9405     | 1,500/-   |
| RS378Z M55 D75 R-R AJ   |       | 9405     | 1,800/-   |
| RS378Z M55 D70 S-R AJ   |       | 9405     | 1,700/-   |
| RS378Z M55 D70 R-R AJ   |       | 9405     | 1,600/-   |
| RS378Z M43 D65 S-R AJ   |       | 9405     | 3,000/-   |
| RS378Z M43 D65 R-R AJ   |       | 9405     | 3,000/-   |
| RS378Z M55 D60 R-R FX   |       | 9405     | 1,400/-   |
| RS378Z M43 D55 R-U AJ   |       | 9405     | 2,000/-   |
| RS378Z M43 D55 R-R FX D |       | 9405     | 3,000/-   |
| RS378Z M43 D55 R-R AJ D |       | 9405     | 3,000/-   |
| RS378Z M43 D55 R-R AJ   |       | 9405     | 2,000/-   |

| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| RS378B MR16 D102 R-R AJ D | 9405     | 4,200/-   |
| RS378B MR16 D102 R-R FX D | 9405     | 4,200/-   |
| RS378B MR16 D78 R-R AJ D  | 9405     | 3,300/-   |
| RS378B MR16 D78 R-R FX D  | 9405     | 2,700/-   |
| RS378B MR16 D78 S-S AJ D  | 9405     | 3,400/-   |
| RS378B MR16 D92 R-R AJ D  | 9405     | 3,800/-   |
| RS378B MR16 D92 R-R FX D  | 9405     | 3,800/-   |

| Type                      | LED Modules | HSN Code | MRP (INR) |
|---------------------------|-------------|----------|-----------|
| RS378 P6 927 PSU-E MB M55 |             | 9405     | 3,100/-   |
| RS378 P6 927 PSU-E NB M55 |             | 9405     | 3,100/-   |
| RS378 P6 927 PSU-E WB M55 |             | 9405     | 3,100/-   |

Nomenclature for LED modules Pxy = xy Watts (P6 = 6W), available in 6W to 42W. CCT option 2700K, 3000K & 4000K available with 90 CRI in all LED modules. Option of NB, MB, WB in all LED Modules. PSD also available with additional cost

## TrueFashion Tracks

TrueFashion is a dedicated spot family answering to the specific needs of fashion retailers. These miniaturised spots with clean and file detailing offer contemporary design and blend seamlessly into the store interior. Truefashion provides the best quality of light by using lenses to optimize the contrasts within the store.



| Type                                  | HSN Code | MRP (INR) |
|---------------------------------------|----------|-----------|
| ST700T LED10 930PC PSU MB 1C WH IN    | 9405     | 8,500/-   |
| ST700T LED10 930PC PSU NB 1C WH IN    | 9405     | 8,500/-   |
| ST700T LED10 930PC PSU WB 1C WH IN    | 9405     | 8,500/-   |
| ST700T LED20 930PC PSU MB 1C WH HB IN | 9405     | 8,000/-   |
| ST700T LED20 930PC PSU MB 1C WH IN    | 9405     | 8,000/-   |
| ST700T LED20 930PC PSU NB 1C WH IN    | 9405     | 8,000/-   |
| ST700T LED20 930PC PSU WB 1C WH IN    | 9405     | 8,000/-   |
| ST700T LED30 930PC PSU MB 1C WH IN    | 9405     | 9,500/-   |
| ST700T LED30 930PC PSU WB 1C WH IN    | 9405     | 9,500/-   |
| ST700T LED30 930PW PSD VLC MB WH IN   | 9405     | 18,500/-  |
| ST700T LED30 930PW PSD VLC WB WH IN   | 9405     | 18,500/-  |
| ST700T LED30 930PW PSU MB 3C WH IN    | 9405     | 9,100/-   |
| ST700T LED30 930PW PSU WB 3C WH IN    | 9405     | 9,100/-   |
| ST700T LED40 930PC PSU MB 1C WH HB IN | 9405     | 11,500/-  |
| ST700T LED40 930PC PSU MB 1C WH IN    | 9405     | 10,000/-  |
| ST700T LED40 930PC PSU WB 1C WH IN    | 9405     | 10,000/-  |

Housing color options of white and black. Dali and VLC options also for specific SKUs.

## EcoAccent Track

Track mounted accent lighting luminaire in pressure diecast housing with two options of lumen pack. Track of 1M and 2M available to be ordered separately.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| ST271T LED20/830 PSU-E MB 1C BK | 9405     | 6,500/-   |
| ST271T LED40/830 PSU-E MB 1C BK | 9405     | 7,000/-   |

Available in narrow, medium and wide beam optics with CCT option of 3000K, 4000K, 5000K.

## EcoAccent Spot

Recessed mounted accent lighting luminaire with diecast aluminium heat sink and sand grain finishing reflector, available in two lumen packs with option of DALI dimmable driver.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| RS271B LED20/830 PSU-E MB WH | 9405     | 6,500/-   |
| RS271B LED40/830 PSU-E MB WH | 9405     | 6,500/-   |
| RS271B LED20/830 PSD MB WH   | 9405     | 7,500/-   |
| RS271B LED40/830 PSD MB WH   | 9405     | 8,000/-   |

Available in narrow, medium and wide beam optics with CCT option of 3000K, 4000K, 5000K. Housing color option of White and Black

## SmartBright Accent Pro

Deep recessed accent lighting luminaire in adjustable and fixed with COB LED, flexible to suit your style and different applications with multiple color options for trims.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| RS362B LED6S/930 PSU NB WH     | 9405     | On Demand |
| RS362B LED10S/930 PSU NB WH    | 9405     | On Demand |
| RS362B LED16S/930 PSU NB WH    | 9405     | On Demand |
| RS361B LED6S/930 PSU NB WH-WH  | 9405     | On Demand |
| RS361B LED10S/930 PSU NB WH-WH | 9405     | On Demand |
| RS361B LED16S/930 PSU NB WH-WH | 9405     | On Demand |

RS362B series is Adjustable, RS261B is Fixed; CCT Options - 6500K, 4000K, 3000K

| Accessories     |          |           |
|-----------------|----------|-----------|
| Type            | HSN Code | MRP (INR) |
| AC362 6S White  | 9405     | On Demand |
| AC362 10S White | 9405     | On Demand |
| AC362 16S White | 9405     | On Demand |

Accessories are with Adjustable type only, have to be purchased along with adjustable luminaire; Available in color Silver, Chrome, Gold, Rose Gold, Black



## SmartBright Accent

Accent lighting luminaire in three range with COB LED, flexible to suit your style and different applications. Aluminium housing ensures better thermal management.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| RS262B LED6S/865 PSU MB WH   | 9405     | 1,650/-   |
| RS262B LED10S/865 PSU MB WH  | 9405     | 2,020/-   |
| RS262B LED15S/865 PSU MB WH  | 9405     | 3,540/-   |
| RS262B LED20S/865 PSU MB WH  | 9405     | 4,100/-   |
| RS262B LED30S/865 PSU MB WH  | 9405     | 4,630/-   |
| RS263B LED8S/865 PSU MB WH   | 9405     | 2,020/-   |
| RS263B LED15S/865 PSU MB WH  | 9405     | 3,030/-   |
| RS263B LED20S/865 PSU MB WH  | 9405     | 3,920/-   |
| RS263B LED36S/865 PSU MB WH  | 9405     | 4,900/-   |
| RS261B LED6S/865 PSU MB WH   | 9405     | 1,520/-   |
| RS261B LED10S/865 PSU MB WH  | 9405     | 1,900/-   |
| RS261B LED20S/865 PSU WB WH  | 9405     | 3,300/-   |
| RS261B LED25S/865 PSU VWB WH | 9405     | 4,040/-   |
| RS261B LED30S/865 PSU VWB WH | 9405     | 5,310/-   |

RS262B series is Adjustable, RS263B is Zoom and RS261B is Fixed; CCT Options - 6500K, 4000K, 3000K

## Cove Lights

### Flex Cove G5 Pro

Flex Cove G5 LED strip is the professional solution, ideal for application in retail, hospitality & offices. Available in IP20 and IP44 versions, with long system life of 30000 burning hours and 50000 burning hours (on demand). Mounting accessories including Al channel, PC diffuser, leader cable & mounting clips available for order separately.

\*Driver to be ordered seperately



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| LS170S LED8 827 IP20 L5000 PRO       | 9405     | On Demand |
| LS170S LED8 S 827 IP20 L5000 PRO     | 9405     | On Demand |
| LS170S LED12 827 IP20 L5000 PRO      | 9405     | On Demand |
| LS170S LED16 827 IP20 L5000 PRO      | 9405     | On Demand |
| LS170S LED20 927 IP20 L5000 PRO      | 9405     | On Demand |
| LS170S LED8 RGBW IP44 L5000 PRO      | 9405     | On Demand |
| LS170S LED10 TNW IP44 L5000 PRO      | 9405     | On Demand |
| LS170S LED20 940 IP20 L5000 HE PRO L | 9405     | On Demand |
| LS170S LED20 930 IP20 L5000 HE PRO L | 9405     | On Demand |
| AC170Z connector with leader PRO     | 9405     | On Demand |
| AC170Z connector PRO                 | 9405     | On Demand |
| AC170Z mounting clip IP44 TNW RGBW   | 9405     | On Demand |
| AC170Z End cap IP44 TNW RGBW         | 9405     | On Demand |

Available in CCT option of 2700K, 4000K, 6500K in IP20 and IP44. CRI 90 available on demand.



## Flex Cove G5

Flex Cove G5 LED strip is the professional solution, ideal for application in retail, hospitality & offices. Available in IP20 and IP44 versions, with long system life of 30000 burning hours. Mounting accessories including AI channel, PC diffuser, leader cable & mounting clips available for order separately.

\*Driver to be ordered separately



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| LS170S LED4 827 IP20 L5000 G2   | 9405     | On Demand |
| LS170S LED8 827 IP20 L5000 G2   | 9405     | On Demand |
| LS170S LED8 S 827 IP20 L5000 G2 | 9405     | On Demand |
| LS170S LED12 827 IP20 L5000 G2  | 9405     | On Demand |
| LS170S LED16 827 IP20 L5000 G2  | 9405     | On Demand |

Available in CCT option of 2700K, 4000K, 6500K in IP20 and IP44. CRI 90 available on demand.

| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| AC170Z mounting clip IP20 LED20         | 9405     | On Demand |
| AC170Z connector with leader cable IP44 | 9405     | On Demand |
| AC170Z connector with leader cable IP20 | 9405     | On Demand |
| AC170Z connector IP44                   | 9405     | On Demand |
| AC170Z connector IP20                   | 9405     | On Demand |
| AC170Z End cap IP44                     | 9405     | On Demand |
| AC170Z mounting clip IP44               | 9405     | On Demand |
| AC170Z mounting clip IP20               | 9405     | On Demand |
| AC170Z surface mount triangle L1000     | 9405     | On Demand |
| AC170Z surface mount High H L1000       | 9405     | On Demand |
| AC170Z surface mount Low H L1000        | 9405     | On Demand |
| AC170Z recessed High H L1000            | 9405     | On Demand |
| AC170Z recessed Low H L1000             | 9405     | On Demand |

## Trunking

### Smart Bright Trunking

Trunking based solution for supermarkets and industrial applications with high ceilings requiring continuous linear installations. Available in two different lumen packs and multiple option of trunk lengths. Accessories needs to be ordered separately.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| <b>LED Inserts</b>             |          |           |
| LL188X 1XDLED40-6500 PSU OD WH | 9405     | 3,900/-   |
| L188X 1XDLED60-6500 PSU OD WH  | 9405     | 4,700/-   |
| <b>Trunk</b>                   |          |           |
| TTX188/02 40LED CR WH          | 9405     | 3,400/-   |
| TTX188/02 60LED CR WH          | 9405     | 3,600/-   |
| TTX188/02 LED AL WH            | 9405     | 4,500/-   |
| <b>End Plate</b>               |          |           |
| TTX188/02 40LED CR WH          | 9405     | 300/-     |
| ZTX188 EP 60LED WH             | 9405     | 350/-     |

### Optimus LED Trunking

Trunking based solution for large open areas with high ceiling requiring continuous linear installation. Luminaire is snap fit mount on trunking system, available in two lumen packs. Accessories need to be additionally ordered.



| Type                                      | HSN Code | MRP (INR) |
|-------------------------------------------|----------|-----------|
| LL199X 1XDLED40-6500 PSE OD WH IP54 G2 HE | 9405     | 5,000/-   |
| LL199X 1XDLED40-6500 PSE OD WH IP54 G2    | 9405     | 4,600/-   |
| LL199X 1XDLED40-6500 PSE OD WH IP54 G2 SE | 9405     | 4,300/-   |
| LL199X 1XDLED50-6500 PSE OD WH IP54 G2 HE | 9405     | 5,500/-   |
| TTX 199/01 LED G2                         | 9405     | 2,200/-   |
| TTX 199/02 LED G2                         | 9405     | 3,600/-   |
| TTX 199/03 LED G2                         | 9405     | 5,600/-   |
| ZTX200 EP G2                              | 9405     | 200/-     |

CCT option 4000K and 5700 K.



Indoor  
Industrial

## Highbays

### Green Perform Prime Gen 2

GreenPerform Prime G2 is a highbay designed to deliver excellent efficiency at 160lm/w and right optics suited for various applications. Offering excellent beam and glare control, this highbay offers an unmatched lighting experience. Green Perform Prime G2 not only provides assured performance, it is also a stylish fit for any facility.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| BY615P LED100S 5700 NB PSU GR  | 9405     | 17,000/-  |
| BY615P LED100S 5700 WB PSU GR  | 9405     | 17,000/-  |
| BY615P LED150S 5700 NB PSU GR  | 9405     | 18,000/-  |
| BY615P LED150S 5700 WB PSU GR  | 9405     | 18,000/-  |
| BY616P LED200S 5700 NB PSU GR  | 9405     | 22,000/-  |
| BY616P LED200S 5700 WB PSU GR  | 9405     | 23,500/-  |
| BY616P LED250S 5700 NB PSU GR  | 9405     | 23,000/-  |
| BY616P LED250S 5700 WB PSU GR  | 9405     | 25,300/-  |
| BY617P LED300S 5700 NB PSU GR  | 9405     | 27,000/-  |
| BY617P LED250S 5700 ENB PSU GR | 9405     | 29,000/-  |

### Green Perform Prime Gen 2 DALI

Green Perform Prime G2 DALI is a highbay designed to deliver excellent efficiency at 160lm/w and right optics suited for various applications. Offering excellent beam and glare control, this highbay offers an unmatched lighting experience. Green Perform Prime Gen 2 DALI not only provides assured performance, it is also a stylish fit for any facility along with added value of Integrating with lighting controls for energy management, monitoring and assest management.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| BY615P LED100S 57 NB PSD GR  | 9405     | 35,000/-  |
| BY615P LED100S 57 WB PSD GR  | 9405     | 35,000/-  |
| BY615P LED150S 57 NB PSD GR  | 9405     | 37,000/-  |
| BY615P LED150S 57 WB PSD GR  | 9405     | 37,000/-  |
| BY616P LED200S 57 NB PSD GR  | 9405     | 40,000/-  |
| BY616P LED200S 57 WB PSD GR  | 9405     | 40,000/-  |
| BY616P LED250S 57 NB PSD GR  | 9405     | 47,000/-  |
| BY616P LED250S 57 WB PSD GR  | 9405     | 47,000/-  |
| BY617P LED300S 57 NB PSD GR  | 9405     | 51,000/-  |
| BY617P LED300S 57 ENB PSD GR | 9405     | 51,000/-  |



## GreenPerform Prime

GreenPerform Prime is a new age highbay range that offers an industry leading efficacy of 150lm/W specially designed to deliver unmatched performance in adverse industrial environments with its robust housing design and cater to diverse applications with multiple options of beam angles.



| Type                             | HSN Code | MRP (INR) |
|----------------------------------|----------|-----------|
| BY515P LED100S 5700 NB S1 PSU GR | 9405     | 13,000/-  |
| BY515P LED150S 5700 NB S1 PSU GR | 9405     | 15,000/-  |
| BY515P LED200S 5700 NB S1 PSU GR | 9405     | 17,000/-  |
| BY515P LED250S 5700 NB S1 PSU GR | 9405     | 22,000/-  |

## Durabay Prime

Durabay Prime is IP66 & IK08 protected next gen midbay solution with PDC housing, delivers uniform light distribution with both NB & WB optics.



| Type                                | HSN Code | MRP (INR) |
|-------------------------------------|----------|-----------|
| BY225P LED130S CW SYN8 PSU FG GR V2 | 9405     | 15,000/-  |
| BY225P LED130S CW SYWB PSU FG GR V2 | 9405     | 15,000/-  |
| BY225P LED104S CW SYN8 PSU FG GR V2 | 9405     | 12,000/-  |
| BY225P LED104S CW SYWB PSU FG GR V2 | 9405     | 12,000/-  |

Also available in NW/WW version.

## Mini 200

Mini 200 is an intuitive under canopy luminaire suitable for petrol station, sport complex, community center lighting available with options of recessed mounting frame & I bolt version. It has PDC housing, IP66 & IK08 protection & precision control optics.



| Type                                  | HSN Code | MRP (INR) |
|---------------------------------------|----------|-----------|
| BY286V LED100S CW M3-S60 PSU FG WH V2 | 9405     | 12,000/-  |

Also available in DALI version.



## Urban Linea

Philips Urban Linea with its uniform illumination and outstanding output, helps fuel stations create an aesthetic ambience for customers where they feel refreshed, livelier and safe. With its extruded aluminium housing, high efficacy, high efficiency polycarbonate diffuser, IP66 ingress protection and IK08 impact resistance coupled with the linear and sleek form factor.



| Type                                  | HSN Code | MRP (INR) |
|---------------------------------------|----------|-----------|
| BY500B LED88S-865 PSU W7L240 OD WH S1 | 9405     | 13,500/-  |
| BY500B LED88S-865 PSU W7L240 OD WH S2 | 9405     | 15,000/-  |

Also available in 5700K

## PureSpace CleanRoom Range

PureSpace is a comprehensive CleanRoom luminaires range with options for bottom opening, top opening, 2'x2' as well 1'x4'.



| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| CR652B LED60S-6500 PSU CA TO W30L120 WH | 9405     | 18,000/-  |
| CR652B LED36S-6500 PSU CA BO W30L120 WH | 9405     | 15,000/-  |
| CR652B LED36S-6500 PSU CA TO W60L60 WH  | 9405     | 13,000/-  |
| CR652B LED60S-6500 PSU CA TO W60L60 WH  | 9405     | 16,000/-  |
| CR652B LED80S-6500 PSU CA TO W60L60 WH  | 9405     | 18,000/-  |
| CR652B LED36S-6500 PSU CA BO W60L60 WH  | 9405     | 12,500/-  |
| CR652B LED60S-6500 PSU CA BO W60L60 WH  | 9405     | 15,000/-  |
| CR652B LED80S-6500 PSU CA BO W60L60 WH  | 9405     | 17,500/-  |

CCT options: 6500K and 4000K. Also available in DALI option at additional INR 3000/- on MRP.

## LED Bulkhead & Wellglass

### DuraLED Pro Well Glass

DuraLed Pro Well Glass is a PDC Aluminium Housing with PC diffuser with robust construction and high specifications for sustained lighting performance in harsh conditions. Product is designed for Ingress protection of IP65 and Impact resistance of IK08 with Eye Bolt and Cradle mounting assembly options.



| Type                                 | HSN Code | MRP (INR) |
|--------------------------------------|----------|-----------|
| BY202P LED43S CW PSU PC              | 9405     | 3,600/-   |
| BY202P LED43S CW PSU PC SPD          | 9405     | 4,100/-   |
| BY202P LED 43S CW PSU PC LILO        | 9405     | 3,800/-   |
| BY202P LED 43S CW PSU PC SPD LILO    | 9405     | 4,300/-   |
| BY203P LED83S CW PSU PC              | 9405     | 7,400/-   |
| BY203P LED83S CW PSU PC SPD          | 9405     | 7,900/-   |
| BY203P LED83S CW PSU PC LILO         | 9405     | 7,700/-   |
| BY203P LED83S CW PSU PC SPD LILO     | 9405     | 8,100/-   |
| Spare-35W Well Glass Cradle Assembly |          |           |
| Spare-70W Well Glass Cradle Assembly |          |           |

Available in 4000 K on Request and MOQ shall be applicable  
Also available in Cradle Version. Cradle has to be ordered separately

### Endura LED Bulkhead

Pressure die cast housing LED bulkhead with IP66 protection and IK09 impact resistance suitable for surface and wall mounting applications.



| Type                       | HSN Code | MRP (INR) |
|----------------------------|----------|-----------|
| WT202W LED6S CW PSU S3 PC  | 9405     | 2,000/-   |
| WT202W LED6S NW PSU S3 PC  | 9405     | 2,000/-   |
| WT202W LED10S CW PSU S3 PC | 9405     | 2,200/-   |
| WT202W LED10S NW PSU S3 PC | 9405     | 2,200/-   |

### VistaGlow

Robust & reliable LED bulkhead with IP65 protection & IK08 impact resistance suitable for surface and wall mounting applications.



| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| WT140W LED7S CW PSU S1 PC | 9405     | 999/-     |
| WT140W LED7S NW PSU S1 PC | 9405     | 999/-     |

## Industrial Battens

### Endura LED Next

With Philips Endura Next, customers have an industrial batten lighting solution that makes a valuable contribution to the profitability of their business, providing both operational and maintenance cost savings. This unique solution comes with a wide range of intelligent (DALI, PIR movement detection) and networkable options such as Interact IoT enabled platform (both in wired & wireless options). No matter what your requirement is "Endura Next" comes with endless possibilities in this era of connected lighting and is specifically designed to minimize downtime in operations. Flicker free, high efficiency and robust industrial batten family suitable for surface, wall and conduit mounting.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| BN308C LED20S-6500 L60 PSU WH  | 9405     | 1,900/-   |
| BN308C LED20S-6500 L120 PSU WH | 9405     | 1,950/-   |
| BN308C LED40S-6500 L120 PSU WH | 9405     | 3,200/-   |
| BN308C LED60S-6500 L120 PSU WH | 9405     | 4,400/-   |
| BN308C LED40S-6500 L120 PSD WH | 9405     | 4,500/-   |
| BN308C LED20S-6500 L120 PIR WH | 9405     | 2,950/-   |
| BN308C LED40S-6500 L120 PIR WH | 9405     | 4,200/-   |
| BN308C LED60S-6500 L120 PIR WH | 9405     | 5,400/-   |

| Mounting Accessories |      |       |
|----------------------|------|-------|
| AC308C MB S/A        | 9405 | 100/- |
| AC308P MB S/A        | 9405 | 100/- |



## TMC 502

### Mounting rail for TLED lamps

Functional and decorative general purpose basic battens for LED tubes. For surface mounting on the wall or ceiling. The channel has a single piece construction made of powder coated white CRCA sheet steel, eliminating spot welds & hence rust free. The aesthetically designed lamp-holder brackets are side-in-type for ease of installation/ maintenance.



| Type                | HSN Code | MRP (INR) |
|---------------------|----------|-----------|
| TMC 502 1xT-LED 22W | 9405     | 600/-     |
| TMC 502 2xT-LED 22W | 9405     | 800/-     |

## TMC 100

### Mounting rail for TLED lamps

The channel has a single piece construction made of powder coated white CRCA sheet steel, eliminating spot welds & hence rust free. The aesthetically designed lamp-holder brackets are side-in-type for ease of installation/ maintenance.



| Type                    | HSN Code | MRP (INR) |
|-------------------------|----------|-----------|
| TMC100 1xTLED 13-20w WH | 9405     | 550/-     |
| TMC100 2xTLED 13-20w WH | 9405     | 750/-     |

## Waterproof LED Luminares

### Essential SmartBright IP65 Batten

Essential SmartBright batten provides the opportunity to the customers to upgrade to a superior quality IP65 batten assuring high performance in harsh industrial environments.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| WT150C LED 20S 6500 PSU L120 | 9405     | 2,800/-   |
| WT150C LED 20S 4000 PSU L120 | 9405     | 2,800/-   |
| WT150C LED 40S 6500 PSU L120 | 9405     | 3,800/-   |
| WT150C LED 40S 4000 PSU L120 | 9405     | 3,800/-   |

### SmartBright GEN 2 IP65 Batten

IP65 Dust and Waterproof LED Luminaire with Efficacy >120 lm/W with High Specification Driver. Polycarbonate housing with Impact Resistance of IK08 suitable for wall & ceiling mount applications.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| WT150C LED 27S 6500 PSU L120 | 9405     | 4,500/-   |
| WT150C LED 27S 4000 PSU L120 | 9405     | 4,500/-   |
| WT150C LED 44S 6500 PSU L120 | 9405     | 5,000/-   |
| WT150C LED 44S 4000 PSU L120 | 9405     | 5,000/-   |





### SmartBright MW IP65

SmartBright MW is an intelligent waterproof LED luminaire with micro wave sensors for movement detection. With factory set dimming profiles of 50% and 100%, light dims to these levels in case occupancy is not detected within 5 minutes. luminaire come with high efficiency > 120 lm/w, IP65 - dust and waterproof LED luminaire, IK08 with polycarbonate housing suitable for wall & ceiling mount applications.



| Type                              | HSN Code | MRP (INR) |
|-----------------------------------|----------|-----------|
| WT150C LED44S-6500 MW D50 L120 L1 | 9405     | 6,000/-   |
| WT150C LED44S-6500 MW D0 L120 L1  | 9405     | 6,000/-   |

Available in 4000 K

### Essential SmartBright SQ IP65 Batten

Essential SmartBright SQ batten is a New Gen water- proof LED luminaire with high efficiency >120lm/w, IK07 Impact resistance having options in 2ft, 4ft and 5ft with 1800, 4000 and 5600 lumen packs.



| Type                         | HSN Code | MRP (INR) |
|------------------------------|----------|-----------|
| WT068C CW LED18 L600 PSU IN  | 9405     | 2,100/-   |
| WT068C NW LED18 L600 PSU IN  | 9405     | 2,100/-   |
| WT068C CW LED40 L1200 PSU IN | 9405     | 3,100/-   |
| WT068C NW LED40 L1200 PSU IN | 9405     | 3,100/-   |
| WT068C CW LED56 L1500 PSU IN | 9405     | 4,000/-   |
| WT068C NW LED56 L1500 PSU IN | 9405     | 4,000/-   |

# EcoSet



Simple



Reliable



Affordable

For projects seeking basic controls and incremental energy savings



## Simple system architecture

designed to provide broad options – wired or wireless; with integrated or external sensors – for office, parking or industry focused on simplicity, affordable cost and energy saving benefits.

**Energy savings at the core.** Sensors built into each solution come with functions such as, movement and daylight detection, automatic dimming function and grouping control availability capabilities. Their single target is to provide maximized energy savings.

## Easiest way to do commissioning.

**One-touch commissioning** for office application: one simple touch of the remote control is all it takes to create the link; **commissioning free** for parking application: Plug-and-play, zero effort needed to create a network.

**Wireless grouping at its simplest and reliability.** Whether for an office or warehouse, using mesh network (up to 50 nodes); or a parking using broadcasting (up to a defined distance away from any sensor master).



Office



Parking



Industry

## Why EcoSet Wireless



### Simple

- Simple architecture
- Simple to install : No additional wiring/one touch commissioning
- Simple to operate : Mobile app free/gateway free Wi-Fi/internet free



### Reliable

- Best of the best luminaire design
- Trustable sensor detection performance
- Best in class performance



### Affordable

- End-to-end cost-effective mindset
- Market intimacy

## Energy efficient wireless solution

Philips EcoSet wireless solution

innovation + you



Downlight DN296



Panel RC380



Highbay BY615 10 & 15K



Wireless PIR sensor



Linear SP780



Waterproof WT150



BLE IR Remote Controller



BLE Switch Dim

| OFFICE                         |                                           |              |       |
|--------------------------------|-------------------------------------------|--------------|-------|
| Product Type                   | Description                               | 12 NC        | MRP   |
| Downlight                      | DN296B LED20S-6500 PSE WH S1 L1 W         | 919515815865 | 3500  |
| Recessed 600mmx600mm Luminaire | RC380B LED30S-6500 G6 L60W60 PSU OD L1 W  | 919515815775 | 6000  |
| Recessed 600mmx600mm Luminaire | RC380B LED36S-6500 G6 L60W60 PSU OD L1 W  | 919515815772 | 6500  |
| Batten Office                  | BN308C LED44S-6500 L120 IND WH L1 W       | 919515816137 | 6000  |
| Linear Standalone              | SP780 H LED25S/86S PSU W5L116 OD WH L1 W  | 919515815796 | 8000  |
| Linear Standalone              | SP780 H LED23S/86S PSU W5L116 OC WH L1 W  | 919515815977 | 9000  |
| Linear Continuous              | SP780 H LED100S/86S PSU W5L4x4 OD WH L1 W | 919515815870 | 32000 |
| Linear Continuous              | SP780 H LED88S/86S PSU W5L4x4 OC WH L1 W  | 919515816074 | 36000 |
| PIR Wireless Indoor Sensor     | SEG101 PIR Wireless WH                    | 911401542902 | 5000  |
| Commissioning Device           | EcoSet BLE IR Remote Controller           | 911401590622 | 4500  |

| PARKING                     |                                     |              |      |
|-----------------------------|-------------------------------------|--------------|------|
| Product Type                | Description                         | 12 NC        | MRP  |
| Batten Parking              | BN308C LED44S-6500 L120 PSU WH L1 W | 919515815721 | 6000 |
| Waterproof                  | WT150C LED38S-6500 PSU L120 L1 W    | 919515815778 | 6000 |
| PIR wireless Parking Sensor | SEG101 PIR IP65 Wireless WH         | 911401543002 | 6000 |

| INDUSTRY             |                                    |              |       |
|----------------------|------------------------------------|--------------|-------|
| Product Type         | Description                        | 12 NC        | MRP   |
| Highbay              | BY615P LED100S 5700 NB PSU GR L1 W | 919515815522 | 23000 |
| Highbay              | BY615P LED100S 5700 WB PSU GR L1 W | 919515815631 | 23000 |
| Highbay              | BY615P LED150S 5700 NB PSU GR L1 W | 919515815523 | 25000 |
| Highbay              | BY615P LED150S 5700 WB PSU GR L1 W | 919515815632 | 25000 |
| Commissioning Device | EcoSet BLE IR Remote Controller    | 911401590622 | 4500  |



# Outdoor

# UrbanEdge LED Streetlight

## Bringing brilliance to streets

UrbanEdge Street family with fluid and elegant design which enhances the overall look of main highways/expressways making the journey of drivers more pleasant and safe. This road luminaire offers various photometric technologies and numerous lumen packages to meet all your road and urban lighting needs, while ensuring fast return on investment.

| Description              | UrbanEdge                                                   |
|--------------------------|-------------------------------------------------------------|
| Type                     | BRP50X                                                      |
| System wattage (nominal) | 60W, 70W, 90W, 120W, 150W, 170W, 200W, 230W, 250W           |
| System lumen output (lm) | 8.4K, 9.8K, 12.6K, 16.8K, 21.0K, 23.8K, 28.0K, 32.2K, 35.0K |
| Operating voltage range  | 120-270 V                                                   |
| System Efficacy          | 140 Lm/Watt                                                 |
| Power factor             | 0.95                                                        |
| LED lifetime @L70B50     | 75K Hrs                                                     |
| SDCM                     | <5                                                          |
| CRI                      | Typ. 70                                                     |
| Color temperature        | 5700K                                                       |
| IP rating                | 66                                                          |
| IK rating                | 10                                                          |
| Inbuilt surge protection | 4kV                                                         |



### Control

Option of on/off/  
0-10V/DALI driver



### High Efficiency

System Efficacy increased  
up to 140lm/w



### Safety

440V protection for 8 hours,  
option of 10KV SPD available.





## Street Lights

### UrbanEdge Pro

UrbanEdge family is an IP66 road lighting luminaire delivering 130 lumen/watt with high power LED light source, PDC housing, high impact resistance (IK10) with PC cover & top openable access to drivers for ease of maintenance. Comes with integrated optics to ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 8-12 mts.

Pole dia: 48-60mm



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| BRP501 LED078 CW R5C PSU S1 V1 | 9405     | 6,900/-   |
| BRP501 LED091 CW R5C PSU S1 V1 | 9405     | 9,200/-   |
| BRP502 LED117 CW R5C PSU S1 V1 | 9405     | 10,800/-  |
| BRP503 LED156 CW R5C PSU S1 V1 | 9405     | 16,100/-  |
| BRP504 LED195 CW R5C PSU S1 V1 | 9405     | 20,700/-  |

CCT option : NW/WW. Add Rs 800 for 10KV SPD, provision for SPD is there inside the luminaire.

### UrbanEdge Plus

UrbanEdge family is an IP66 road lighting luminaire delivering 140 lumen/watt with high power LED light source, PDC housing, high impact resistance (IK10) with PC cover & top openable access to drivers for ease of maintenance. Comes with integrated optics to ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 8-14 mts.

Pole dia: 48-60mm



| Type                        | HSN Code | MRP (INR) |
|-----------------------------|----------|-----------|
| BRP501 LED084 CW R3C PSU S1 | 9405     | 8,000/-   |
| BRP501 LED098 CW R3C PSU S1 | 9405     | 11,000/-  |
| BRP502 LED126 CW R3C PSU S1 | 9405     | 13,500/-  |
| BRP503 LED168 CW R3C PSU S1 | 9405     | 17,500/-  |
| BRP504 LED210 CW R3C PSU S1 | 9405     | 22,000/-  |
| BRP505 LED238 CW R3C PSU S1 | 9405     | 28,000/-  |
| BRP505 LED280 CW R3C PSU S1 | 9405     | 33,000/-  |
| BRP505 LED322 CW R3C PSU S1 | 9405     | 37,000/-  |

CCT option : NW/WW. Add Rs 800 for 10KV SPD, provision for SPD is there inside the luminaire.  
Connected Option: 1-10V, Interact Ready.

### SkyLine e Way

SkyLine Xtra family is an IP66 road lighting luminaire delivering 140 lumen/watt with single die ceramic base high power LED light source, PDC housing, high impact resistance (IK10) with PC cover and top openable access to drivers for ease of maintenance. Comes with integrated optics (4 Optics) to ensure uniform distribution and higher efficacy thus offering higher spacing between poles and maintenance free system ideal for road width up to 10-18 mts. (300W -350W). Pole dia: 48-60mm.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| BRP370 LED414 CW SLC S1 PSU GR | 9405     | 62,400/-  |
| BRP370 LED414 CW SLD S1 PSU GR | 9405     | 62,400/-  |
| BRP370 LED414 CW SLG S1 PSU GR | 9405     | 62,400/-  |
| BRP370 LED414 CW SLH S1 PSU GR | 9405     | 70,200/-  |
| BRP370 LED455 CW SLC S1 PSU GR | 9405     | 70,200/-  |
| BRP370 LED455 CW SLD S1 PSU GR | 9405     | 70,200/-  |
| BRP370 LED455 CW SLG S1 PSU GR | 9405     | 70,200/-  |
| BRP370 LED455 CW SLH S1 PSU GR | 9405     | 70,200/-  |
| BRP370 LED483 CW SLC S1 PSU GR | 9405     | 78,000/-  |
| BRP370 LED483 CW SLD S1 PSU GR | 9405     | 78,000/-  |
| BRP370 LED483 CW SLG S1 PSU GR | 9405     | 78,000/-  |
| BRP370 LED483 CW SLH S1 PSU GR | 9405     | 78,000/-  |

CCT option : NW/WW. Add Rs 800 for 10KV SPD, provision for SPD is there inside the luminaire.  
Connected Option: 1-10V, Interact Ready.

# CityStar LED Streetlight

A sustainable and cost-effective choice in streetlights

Philips CityStar offers a range of streetlighting solutions for illuminating streets and parks. Its sleek design and refined aesthetics make it a top choice for various illumination needs. CityStar features a robust architecture with its aluminum alloy pressure die cast housing and integrated pole piece part which can withstand any harsh weather conditions.

| Description              | CityStar                                      |
|--------------------------|-----------------------------------------------|
| Type                     | BRP33X                                        |
| System wattage (nominal) | 25W, 30W, 35W, 40W 45W, 90W, 120W, 150W       |
| System lumen output (lm) | 3.0K, 3.6K, 4.2K, 4.8K, 5.4K, 11K, 14.4K, 18K |
| Operating voltage        | 140-270 V                                     |
| System Efficacy          | >120 Lm/Watt                                  |
| Power factor             | 0.95                                          |
| LED lifetime @L70B50     | 50K Hrs                                       |
| SDCM                     | <5                                            |
| CRI                      | Typ. 70                                       |
| Color temperature        | 5700K                                         |
| IP rating                | 66                                            |
| IK rating                | 7                                             |
| Inbuilt surge protection | 4kV                                           |



## Housing

Pressure die cast housing



## Ease of Maintenance

Prewired connections with HV/LV cut-off options



## Safety

440V protection for 8 hours, option of 10KV SPD available.





## CityStar Street Light

High performance low wattage street light delivering 120 lumen/watt with high power LED light source with IP66 protection, PDC housing and high impact resistance (IK08) polycarbonate cover luminaire. Pole dia: 32-40mm till 45W.



| Type                             | HSN Code | MRP (INR) |
|----------------------------------|----------|-----------|
| BRP330 LED24 CW R5N PC PSU S1 V1 | 9405     | 2,500/-   |
| BRP330 LED30 CW R5N PC PSU S1 V1 | 9405     | 3,200/-   |
| BRP331 LED36 CW R5N PC PSU S1 V1 | 9405     | 5,000/-   |
| BRP331 LED42 CW R5N PC PSU S1 V1 | 9405     | 5,300/-   |
| BRP331 LED48 CW R5N PC PSU S1 V1 | 9405     | 5,500/-   |
| BRP331 LED54 CW R5N PC PSU S1 V1 | 9405     | 5,800/-   |

CCT option : NW/WW. Add Rs 400 for 10KV SPD, provision for SPD is there inside the luminaire.

## CityStar Street Light

High performance low wattage street light delivering 120 lumen/watt with high power LED light source with IP66 protection, PDC housing and high impact resistance (IK07) glass cover luminaire. Pole dia: 48-60mm; 90W-150W.




| Type                              | HSN Code | MRP (INR) |
|-----------------------------------|----------|-----------|
| BRP333 LED110 CW R5C FG PSU S1 V1 | 9405     | 12,000/-  |
| BRP334 LED144 CW R5C FG PSU S1 V1 | 9405     | 14,000/-  |
| BRP335 LED180 CW R5C FG PSU S1 V1 | 9405     | 17,000/-  |

CCT option : NW/WW. Add Rs 800 for 10KV SPD, provision for SPD is there inside the luminaire.

## SmartBright Essential

SmartBright Essential is a street lighting luminaire delivering >100 lumen/watt with PDC housing and street light optics to ensure uniform distribution.



| Type                             | HSN Code | MRP (INR) |
|----------------------------------|----------|-----------|
| BRP029 LED25 CW SLR GR PSU SPD   | 9405     | 2,400/-   |
| BRP030 P LED35 CW SLR GR PSU SPD | 9405     | 4,400/-   |
| BRP031 LED45 CW SLR GR PSU SPD   | 9405     | 5,300/-   |
| BRP032 P LED75 CW SLR PSU GR SPD | 9405     | 7,000/-   |
| BRP033 LED90 CW SLR GR PSU SPD   | 9405     | 9,000/-   |
| BRP033 LED100 CW SLR GR PSU SPD  | 9405     | 10,000/-  |
| BRP033 LED120 CW SLR GR PSU SPD  | 9405     | 12,000/-  |

CCT option WW. 10 KV SPD is provisioned inside luminaires.

# interact City

Full end-to-end lighting management application.  
Easy to install, use and expand.

Philips offer wide variety of street light luminaires with smart devices, enabled for integration on to Interact platform.  
Product support wired and wireless architectures offered as part connected portfolio for cities.

## Interact Ready street light options



BRP340  
Skyline



BRP360  
Skyline Xtra



BRP370  
SkyLine e Way



BRP505  
Urban Edge

## Flood Lights

### Uniflood

IP66 floodlight luminaire with pressure die-cast aluminium housing with high impact resistance (IK07) glass cover and high power single die ceramic base LEDs and unique optics ensuring uniform distribution.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| BVP120 LED047 CW FLNB FG A1 PSU GR | 9405     | 9,000/-   |
| BVP120 LED093 CW FLNB FG A1 PSU GR | 9405     | 15,000/-  |

CCT option : NW/WW. Add Rs 400 for 10KV SPD, provision for SPD is there inside the luminaire.

### Uniflood 2

IP66 floodlight luminaire with pressure die-cast aluminium housing with high impact resistance (IK07) glass cover and high power single die ceramic base LEDs with option of symmetric and asymmetric optics and multiple lumen outputs suiting to different lighting applications.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| BVP122 LED147 CW AK55 FG PSU A1 | 9405     | 25,000/-  |
| BVP122 LED160 CW FLNB FG PSU A1 | 9405     | 25,000/-  |
| BVP122 LED162 CW SY24 FG PSU A1 | 9405     | 25,000/-  |
| BVP122 LED168 CW AK55 FG PSU A1 | 9405     | 26,000/-  |
| BVP122 LED184 CW FLNB FG PSU A1 | 9405     | 26,000/-  |
| BVP122 LED185 CW SY24 FG PSU A1 | 9405     | 26,000/-  |

CCT option : NW/WW. Add Rs 800 for 10KV SPD, provision for SPD is there inside the luminaire.  
Dimmable 1-10 Option available.

## Tango Mini

High performance floodlight luminaire family with multiple lumen output options. Pressure die-cast aluminium housing with high impact resistance (IK07) glass cover IP66 protection and high power single die ceramic base LEDs delivering 130lm/w.



| Type                                    | HSN Code | MRP (INR) |
|-----------------------------------------|----------|-----------|
| BVP192 LED091 CW HO NB FG A1 PSU GR     | 9405     | 11,500/-  |
| BVP192 LED132 CW HO NB FG A1 PSU GR     | 9405     | 13,800/-  |
| BVP192 LED165 CW NB FG A1 PSU GR        | 9405     | 23,000/-  |
| BVP192 LED177 CW NB FG A1 PSU GR        | 9405     | 25,300/-  |
| BVP192 LED091 CW HO NB FG A1 PSU GR SPD | 9405     | 11,900/-  |
| BVP192 LED132 CW HO NB FG A1 PSU GR SPD | 9405     | 14,200/-  |
| BVP192 LED165 CW NB FG A1 PSU GR SPD    | 9405     | 23,400/-  |
| BVP192 LED177 CW NB FG A1 PSU GR SPD    | 9405     | 25,700/-  |

CCT option: NW/WW. 10 KV SPD is provisioned inside luminaire.  
Dimmable Option: 1-10V

## FieldStar Plus

High wattage floodlight luminaire family with system efficacy of 120 lumens/watt and option of multiple wattages in both wide and narrow beam options with PDC housing, high impact resistance (IK07) glass cover making it perfect solution for wide range of applications like parking areas, sports facilities and area lighting in industrial applications.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| BVP284 LED300 CW FG SY5NB 250W PSU SPD | 9405     | 35,000/-  |
| BVP284 LED290 WW FG SY5NB 250W PSU SPD | 9405     | 35,000/-  |
| BVP284 LED360 CW FG SY5NB 300W PSU SPD | 9405     | 36,500/-  |
| BVP284 LED340 WW FG SY5NB 300W PSU SPD | 9405     | 36,500/-  |
| BVP295 LED420 CW FG SY5WB 350W PSU SPD | 9405     | 38,000/-  |
| BVP295 LED420 CW FG SY5NB 350W PSU SPD | 9405     | 38,000/-  |
| BVP295 LED480 CW FG SY5WB 400W PSU SPD | 9405     | 42,000/-  |
| BVP295 LED480 CW FG SY5NB 400W PSU SPD | 9405     | 42,000/-  |

CCT option : WW. 10KV SPD is provisioned inside luminaire.

## FieldStar

Floodlight luminaire family with system efficacy of 120 lumens/watt and option of multiple wattages in both wide and narrow beam options with PDC housing, high impact resistance (IK07) glass cover making it perfect solution for wide range of applications like parking areas, sports facilities and area lighting in industrial applications.



| Type                                  | HSN Code | MRP (INR) |
|---------------------------------------|----------|-----------|
| BVP281 LED085 CW FG SY5WB 70W V1      | 9405     | 10,000/-  |
| BVP282 LED120 CW FG SY5WB 100W V1     | 9405     | 12,000/-  |
| BVP283 LED181 CW FG SY5WB 150W V1     | 9405     | 14,000/-  |
| BVP283 LED181 CW FG SY5NB 150W V1     | 9405     | 14,000/-  |
| BVP283 LED240 CW FG SY5WB 200W V1     | 9405     | 18,000/-  |
| BVP283 LED240 CW FG SY5NB 200W V1     | 9405     | 18,000/-  |
| BVP281 LED085 CW FG SY5WB 70W SPD V1  | 9405     | 10,400/-  |
| BVP282 LED120 CW FG SY5WB 100W SPD V1 | 9405     | 12,400/-  |
| BVP283 LED181 CW FG SY5WB 150W SPD V1 | 9405     | 14,400/-  |
| BVP283 LED181 CW FG SY5NB 150W SPD V1 | 9405     | 14,400/-  |
| BVP283 LED240 CW FG SY5WB 200W SPD V1 | 9405     | 18,400/-  |
| BVP283 LED240 CW FG SY5NB 200W SPD V1 | 9405     | 18,400/-  |

CCT option : WW

## Tango LED

Family of high efficiency floodlight luminaires (135 lumens/watt) with high power single die ceramic base LED and IP66 single piece die cast housing and high impact resistance (IK10) PC cover. Tango LED offers unmatched performance and outstanding light quality with the help of specially designed optics (FLNB, AWB, NB) dedicatedly designed for diverse applications like apron lighting, ports and docks lighting and sports facilities.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| BVP483 LED203 CW SWB A1 PSU GR SPD | 9405     | 23,000/-  |
| BVP483 LED208 CW NB A1 PSU GR SPD  | 9405     | 23,000/-  |
| BVP483 LED197 CW AWB A1 PSU GR SPD | 9405     | 23,000/-  |
| BVP483 LED197 CW AMB A1 PSU GR SPD | 9405     | 23,000/-  |
| BVP483 LED210 CW SMB A1 PSU GR SPD | 9405     | 23,000/-  |
| BVP483 LED227 CW SWB A1 PSU GR SPD | 9405     | 25,300/-  |
| BVP483 LED234 CW NB A1 PSU GR SPD  | 9405     | 25,300/-  |
| BVP483 LED219 CW AWB A1 PSU GR SPD | 9405     | 25,300/-  |
| BVP483 LED219 CW AMB A1 PSU GR SPD | 9405     | 25,300/-  |
| BVP483 LED234 CW SMB A1 PSU GR SPD | 9405     | 25,300/-  |
| BVP483 LED252 CW SWB A1 PSU GR SPD | 9405     | 28,750/-  |
| BVP483 LED259 CW NB A1 PSU GR SPD  | 9405     | 28,750/-  |
| BVP483 LED241 CW AWB A1 PSU GR SPD | 9405     | 28,750/-  |
| BVP483 LED241 CW AMB A1 PSU GR SPD | 9405     | 28,750/-  |
| BVP483 LED257 CW SMB A1 PSU GR SPD | 9405     | 28,750/-  |


CCT option : NW/WW. 10KV SPD is provisioned inside luminaire. Dimmable Option : 1-10V, Interact Ready.



DY Patil Stadium, Maharashtra

## Tango XL LED

Family of high wattage and high efficiency floodlight luminaires (135 lumens/watt) with high power single die ceramic base LED and IP66 single piece die cast housing and high impact resistance (IK10) PC cover. Tango LED offers unmatched performance and outstanding light quality with the help of specially designed optics (FLNB, AWB, NB) dedicatedly designed for diverse applications like apron lighting, ports and docks lighting and sports facilities.



| Type                                | HSN Code | MRP (INR) |
|-------------------------------------|----------|-----------|
| BVP485 LED385 CW FLNB A1 PSU GR SPD | 9405     | 65,780/-  |
| BVP485 LED405 CW NB A1 PSU GR SPD   | 9405     | 65,780/-  |
| BVP485 LED383 CW AWB A1 PSU GR SPD  | 9405     | 65,780/-  |
| BVP485 LED465 CW FLNB A1 PSU GR SPD | 9405     | 71,760/-  |
| BVP485 LED494 CW NB A1 PSU GR SPD   | 9405     | 71,760/-  |
| BVP485 LED462 CW AWB A1 PSU GR SPD  | 9405     | 71,760/-  |
| BVP485 LED530 CW FLNB A1 PSU GR SPD | 9405     | 80,730/-  |
| BVP485 LED559 CW NB A1 PSU GR SPD   | 9405     | 80,730/-  |
| BVP485 LED518 CW AWB A1 PSU GR SPD  | 9405     | 80,730/-  |
| BVP485 LED575 CW FLNB A1 PSU GR SPD | 9405     | 89,700/-  |
| BVP485 LED608 CW NB A1 PSU GR SPD   | 9405     | 89,700/-  |
| BVP485 LED561 CW AWB A1 PSU GR SPD  | 9405     | 89,700/-  |
| BVP485 LED602 CW FLNB A1 PSU GR SPD | 9405     | 95,680/-  |
| BVP485 LED637 CW NB A1 PSU GR SPD   | 9405     | 95,680/-  |
| BVP485 LED597 CW AWB A1 PSU GR SPD  | 9405     | 95,680/-  |

CCT option : NW/WW. 10KV SPD is provisioned inside luminaire.  
Dimmable Option : 1-10V, Interact Ready.

## Tango XL plus

Family of high wattage and high efficiency floodlight luminaires (135 lumens/watt) with high power single die ceramic base LED and IP66 single piece die cast housing and high Impact resistance (IK10) PC cover. Tango LED offers unmatched performance and outstanding light quality with the help of specially designed optics (FLNB, AWB, NB) dedicatedly designed for diverse applications like apron lighting, ports and docks lighting and sports facilities.



| Type                                 | HSN Code | MRP (INR)  |
|--------------------------------------|----------|------------|
| BVP486 LED1200 CW FLNB A1 PSU SPD GR | 9405     | On request |
| BVP486 LED1270 CW NB A1 PSU SPD GR   | 9405     | On request |
| BVP486 LED1190 CW AWB A1 PSU SPD GR  | 9405     | On request |

CCT option : NW/WW. 10KV SPD is provisioned inside luminaire.  
Dimmable Option : 1-10V, Interact Ready.

## SportStar Gen2

SportStar Gen 2 is revolutionary and innovative product for sports lighting application with upto 170K lm light output at CRI 90. The single high power IP66 rated DMX enabled driver delivers flicker-free performance. This sports light is suitable for both new and retrofit installation in professional sports and multipurpose arenas. Complies with HDTV broadcasting requirements and Interact Sports system bringing immersive experience to sports and multipurpose arenas.



| Type                                     | HSN Code | MRP (INR)  |
|------------------------------------------|----------|------------|
| BVP680 M LED1780/957 1580W 230-400V S2 C | 9405     | On request |
| BVP680 M LED1780/957 1580W 230-400V S5 C | 9405     | On request |
| BVP680 M LED1780/957 1580W 230-400V S7 C | 9405     | On request |

## ActiStar

Actistar is compact, single piece, light weight, high performance LED floodlight luminaire which can deliver high output (Upto 100K lumens) at high efficiency for applications like sports (meeting HDTV broadcasting requirements), container yards and ports, aprons. It incorporates best-in-class LED source with option of 9 different optics meeting different lighting applications and lux level requirements.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| BVP631 M LED1095/757 820W S3 NTC   | 9405     | 150,000/- |
| BVP631 M LED1107/757 820W SMB NTC  | 9405     | 150,000/- |
| BVP631 M LED1107/757 820W S5 NTC   | 9405     | 150,000/- |
| BVP631 M LED1029/757 820W AWB NTC  | 9405     | 150,000/- |
| BVP631 M LED1095/757 820W NB NTC   | 9405     | 150,000/- |
| BVP631 M LED1107/757 820W SWB NTC  | 9405     | 150,000/- |
| BVP631 M LED1107/757 820W S6 NTC   | 9405     | 150,000/- |
| BVP631 M LED1107/757 820W S7 NTC   | 9405     | 150,000/- |
| BVP631 M LED1023/757 820W DX10 NTC | 9405     | 150,000/- |

CCT option : NW/WW. Dimmable Option : 1-10V

## ArenaVision LED Gen 3.5

Philips ArenaVision LED floodlighting system is an innovative LED pitch-lighting solution supporting the latest TV broadcasting standards. Designed exclusively for sports and multi-purpose venues, ArenaVision LED offers outstanding light quality, effective thermal management, and long lifetime. Product also function with an external driver box – separate for use at a distance from the floodlight (BV version), or pre-fixed onto the mounting bracket of the floodlight (HGB version). This external driver box ensures ease of installation and lower initial cost.



| Type                                 | HSN Code | MRP (INR)  |
|--------------------------------------|----------|------------|
| BVP428 M1860/957 HGB S2 D25 T40 100K | 9405     | On request |
| BVP428 M1860/957 HGB S3 D25 T40 100K | 9405     | On request |
| BVP428 M1860/957 HGB S4 D25 T40 100K | 9405     | On request |
| BVP428 M1860/957 HGB S5 D25 T40 100K | 9405     | On request |
| BVP428 M1860/957 HGB S7 D25 T40 100K | 9405     | On request |
| BVP428 M1860/957 BV S2 D25 T40 100K  | 9405     | On request |
| BVP428 M1860/957 BV S3 D25 T40 100K  | 9405     | On request |
| BVP428 M1860/957 BV S4 D25 T40 100K  | 9405     | On request |
| BVP428 M1860/957 BV S5 D25 T40 100K  | 9405     | On request |
| BVP428 M1860/957 BV S7 D25 T40 100K  | 9405     | On request |

# interact Sports


Interact enables flexible, multi-purpose venues that can generate new revenue streams, host different types of events, excite audiences in new and unique ways, and create new business opportunities. Manage all the lighting in your stadium, arena, or recreational facility—including pitch lighting, entertainment lighting, and lighting for façades, roof, training grounds, and stands. Flexibly adjust your lighting from event to event or create a set style for brand consistency. Entertain fans with customized light shows before, during, and after the main event, and attract sponsors with light experiences that promote their offerings and brands. Enhance your recreational facilities with pre-programmed, adjustable light settings and data-gathering capabilities.

Philips offer wide variety of flood light luminaires with smart devices, enabled for integration on to Interact Sports Platform. Product support wired and wireless architectures offered as part connected portfolio for sports facilities.


## Interact ready flood light options



BVP483  
Tango



BVP483 DD  
Tango DD




BVP485  
Tango XL



BVP680  
SportStar Gen II



AV 3.5  
Arena Vision Gen 3.5



Actistar

## Landscape Lighting

### UniScape Postop

Reliable and aesthetically designed IP65 post top lantern with symmetric light distribution.



| Type                           | HSN Code | MRP (INR) |
|--------------------------------|----------|-----------|
| BGP200 LED26 CW PSU GR CPC SPD | 9405     | 9,000/-   |
| BGP200 LED35 CW PSU GR CPC SPD | 9405     | 10,500/-  |
| BGP200 LED45 CW PSU GR CPC SPD | 9405     | 13,000/-  |

CCT option: NW/WW. 10 KV SPD is provisioned inside luminaire

### Town Glow Post Top

Town Glow is an exquisite, stylish yet classic design Post Top to beautify your space. State-of-the-art optical design & high performance driver with IP66/IK10 protection ensuring better lighting performance and reliability.



| Type                          | HSN Code | MRP (INR) |
|-------------------------------|----------|-----------|
| BGP300 LED28 757 PSU PC IN S1 | 9405     | 18,000/-  |
| BGP300 LED40 757 PSU PC IN S1 | 9405     | 19,000/-  |
| BGP300 LED50 757 PSU PC IN S1 | 9405     | 20,000/-  |

CCT options: 3000K and 4000K. Add Rs. 800/- for SPD version.

### LED Post Top

Reliable and aesthetically designed IP65 Post Top lantern with symmetric light distribution and limited upward light component.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| BGP161 LED2500/NW PSU 220-240V 7043 IN | 9405     | 20,000/-  |
| BGP161 LED2300/WW PSU 220-240V 7043 IN | 9405     | 20,000/-  |



## LED Bollard

Robustly designed IP65/IK10 Bollard is easy to install with base plate.

| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| BCP150 LED150/WW PSU 220-240V 7043 | 9405     | 11,500/-  |
| BCP151 LED150/WW PSU 220-240V 7043 | 9405     | 12,000/-  |
| BCP150 LED150/NW PSU 220-240V 7043 | 9405     | 11,500/-  |
| BCP151 LED150/NW PSU 220-240V 7043 | 9405     | 12,000/-  |



## LED Step Light

Robust design LED Step Light is IP67/IK10, easy to install, maintain and comes with suitable mounting box.



| Type                                   | HSN Code | MRP (INR) |
|----------------------------------------|----------|-----------|
| BWG150 LED50/WW PSU 220-240V IP67 7043 | 9405     | 7,000/-   |
| BWG150 LED50/NW PSU 220-240V IP67 7043 | 9405     | 7,000/-   |

## UNI Urban NATURE

Timeless elegance is the heart of UNI Urban NATURE range. The design is reminiscent of iconic beauty of 20th -century street lanterns, while meeting today's functional public design requirements. This is a range of post top luminaires with different form factors, different optics and lumen packages meeting modern lighting requirements with heritage looks and offering value beyond illumination, helping cities to create their own signature and character.

| Type                  | HSN Code | MRP (INR)  |
|-----------------------|----------|------------|
| BGP562 LED30S NW 230V | 9405     | On request |
| BGP562 LED70S NW 230V | 9405     | On request |



| Type                      | HSN Code | MRP (INR)  |
|---------------------------|----------|------------|
| BGP563 LED72S NW 230V TA  | 9405     | On request |
| BGP563 LED72SS NW 230V TS | 9405     | On request |
| BGP563 LED120S NW 230V TA | 9405     | On request |
| BGP563 LED120S NW 230V TS | 9405     | On request |
| BGP563 LED180S NW 230V TA | 9405     | On request |
| BGP563 LED18S NW 230V TS  | 9405     | On request |



| Type                      | HSN Code | MRP (INR)  |
|---------------------------|----------|------------|
| BGP564 LED120S NW 230V TA | 9405     | On request |
| BGP564 LED120S NW 230V TS | 9405     | On request |
| BGP564 LED180S NW 230V TA | 9405     | On request |
| BGP564 LED180S NW 230V TS | 9405     | On request |



| Type                     | HSN Code | MRP (INR)  |
|--------------------------|----------|------------|
| BGP565 LED40S NW 230V TA | 9405     | On request |
| BGP565 LED40S NW 230V TS | 9405     | On request |
| BGP565 LED50S NW 230V TA | 9405     | On request |
| BGP565 LED60S NW 230V TS | 9405     | On request |
| BGP565 LED75S NW 230V TA | 9405     | On request |
| BGP565 LED75S NW 230V TS | 9405     | On request |



| Type                      | HSN Code | MRP (INR)  |
|---------------------------|----------|------------|
| BGP566 LED90S NW 230V TA  | 9405     | On request |
| BGP566 LED90S NW 230V TS  | 9405     | On request |
| BGP566 LED144S NW 230V TA | 9405     | On request |
| BGP566 LED144S NW 230V TS | 9405     | On request |
| BGP566 LED198S NW 230V TA | 9405     | On request |
| BGP566 LED198S NW 230V TS | 9405     | On request |



Available in WW(3000K ) & NW (4000K)

## UNI Urban Street

UNI Urban is decorative street light & post top range with classic design & high performance with aluminium diecast housing having IP65/IK08 protection.



| Type                         | HSN Code | MRP (INR)  |
|------------------------------|----------|------------|
| BGP461 LED40 WW 110-277V TS  | 9405     | On request |
| BGP461 LED40 WW 110-277V TA  | 9405     | On request |
| BGP461 LED78 WW 110-277V TS  | 9405     | On request |
| BGP461 LED78 WW 110-277V TA  | 9405     | On request |
| BGP461 LED120 WW 110-277V TS | 9405     | On request |
| BGP461 LED120 WW 110-277V TA | 9405     | On request |

CCT option: 4000K

## UNI Urban Postop



| Type                         | HSN Code | MRP (INR)  |
|------------------------------|----------|------------|
| BDP461 LED33 WW 110-277V TS  | 9405     | On request |
| BDP461 LED65 WW 110-277V TS  | 9405     | On request |
| BDP461 LED100 WW 110-277V TS | 9405     | On request |

## UNI Urban Accessories

| Type                            | HSN Code | MRP (INR)  |
|---------------------------------|----------|------------|
| ZSP461 Screw-thread 370mm       | 9405     | On request |
| ZSP461 Screw-thread 240mm       | 9405     | On request |
| ZSP461 Screw-thread 70mm        | 9405     | On request |
| Mandatory Accessory for BSS/BSP | 9405     | On request |

## UNI Urban Suspended



| Type                         | HSN Code | MRP (INR)  |
|------------------------------|----------|------------|
| BSP461 LED40 WW 110-277V TS  | 9405     | On request |
| BSP461 LED40 WW 110-277V TA  | 9405     | On request |
| BSP461 LED78 WW 110-277V TS  | 9405     | On request |
| BSP461 LED78 WW 110-277V TA  | 9405     | On request |
| BSP461 LED120 WW 110-277V TS | 9405     | On request |
| BSP461 LED120 WW 110-277V TA | 9405     | On request |

## ZCP461 Chess Cover



| Type                            | HSN Code | MRP (INR)  |
|---------------------------------|----------|------------|
| ZCP461 Chess cover              | 9405     | On request |
| Mandatory Accessory for BSS/BSP | 9405     | On request |

## UNI Urban Classic



| Type                              | HSN Code | MRP (INR)  |
|-----------------------------------|----------|------------|
| BSS461 LED40 WW 110-277V CLASSIC  | 9405     | On request |
| BSS461 LED78 WW 110-277V CLASSIC  | 9405     | On request |
| BSS461 LED120 WW 110-277V CLASSIC | 9405     | On request |

## ZCP461 Dome Cover



| Type                        | HSN Code | MRP (INR)  |
|-----------------------------|----------|------------|
| ZCP461 Dome cover           | 9405     | On request |
| Mandatory Accessory for BSS | 9405     | On request |

CCT option: 4000K

## Tunnel Lights

### FlowBase

FlowBase is family of high performance luminaire offering ground-breaking solutions for tunnel lighting applications. This family of luminaire comes with PDC housing with IP66/IK08 protection having high power LED's with unique optics specially designed for excellent performance.



| Type                           | HSN Code | MRP (INR)  |
|--------------------------------|----------|------------|
| BWP352 M LED81/NW 60W DM2 V1   | 9405     | On request |
| BWP352 M LED161/NW 120W DM2 V1 | 9405     | On request |
| BWP352 M LED235/NW 175W DM2 V1 | 9405     | On request |
| BWP352 M LED315/NW 235W DM2 V1 | 9405     | On request |

CCT option : NW/WW. Dimmable Option : 1-10V, Interact Ready.

### Viaduct

LED Viaduct is high performance IP66 Viaduct light with high power LED light source, PDC housing with high impact resistance (IK10). Viaduct optics ensure uniform distribution.



| Type                             | HSN Code | MRP (INR)  |
|----------------------------------|----------|------------|
| BWP120 LED 36 CW FLNB S3         | 9405     | On request |
| BWP120 P LED56 CW FLNB S3 PSU GR | 9405     | On request |
| BWP120 P LED78 CW FLNB S3 PSU GR | 9405     | On request |

10 KV SPD provisioned inside housing available on request

### UniFlood Viaduct

UniFlood Viaduct is revolutionary flood light with PDC housing with high impact resistance IK10 and IP66 rating. Also equipped with unique MRT optics designed to meet the demanding requirements of railway tunnels and metro via-ducts.



| Type                            | HSN Code | MRP (INR) |
|---------------------------------|----------|-----------|
| BWP300 LED024 CW FLNR PSU S1    | 9405     | 7,000/-   |
| BWP301 LED024 CW FG FLNR PSU S1 | 9405     | 9,000/-   |

CCT option : NW/WW. Add Rs 400 for 10KV SPD, provision for SPD is there inside the luminaire.

# Architectural Lighting

## Graze\*

This high-performance linear exterior wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels.



| Type                                           | MRP (INR)  |
|------------------------------------------------|------------|
| ColorGraze Intellihue Powercore, 1ft, 9 Degree | On request |
| ColorGraze Intellihue Powercore, 4ft, 9 Degree | On request |

\*Also available in RGB/RGBW/RGBA/White version

## Graze Compact

This high-performance and low-profile housing, exterior-rated linear wall grazing family of luminaires offers high-quality light in a wide range of luminaire lengths, beam angles, output levels, and power consumption levels. Luminaire is designed to highlight architectural features like molding details, archways, wall facade and windows.



| Type                                         | MRP (INR)  |
|----------------------------------------------|------------|
| ColorGraze Compact Intellihue Powercore, 1ft | On request |
| ColorGraze Compact Intellihue Powercore, 4ft | On request |

## Blast\*

This high-performance range of exterior luminaires offers an extremely wide range of light output, beam angles, and accessories.



| Type                                                              | MRP (INR)  |
|-------------------------------------------------------------------|------------|
| Intellihue Blast Gen5 Powercore, Clear Lens, White Housing, UI/Ce | On request |
| Intellihue Blast Gen5 Powercore, Clear Lens, Black Housing, UI/Ce | On request |

\* Also available in RGB/RGBW/RGBA/White version

## ReachElite HO/HP\*

Go farther with powerful, precision-controlled light that reaches new heights. ReachElite delivers exceptional light to bridges, façades, monuments, and skyscrapers—illuminating the tallest structures and highlighting details up to 564 m (1852 ft) away with the 300W luminaire. This family of long-throw exterior LED luminaires make it happen with high punch and rock-solid reliability.



| Type                                                        | MRP (INR)  |
|-------------------------------------------------------------|------------|
| Reachelite High Output Intellihue Powercore, 100W, 100-277V | On request |
| Reachelite High Output Intellihue Powercore, 200W, 100-277V | On request |
| Reachelite High Output Intellihue Powercore, 300W, 100-277V | On request |
| Reachelite High Punch Intellihue Powercore, 100W, 100-277V  | On request |
| Reachelite High Punch Intellihue Powercore, 200W, 100-277V  | On request |
| Reachelite High Punch Intellihue Powercore, 300W, 100-277V  | On request |

#Also available in RGBW, RGBA & EW version

## ArchiPoint

ArchiPoint iColor Powercore is a daylight-visible, exterior-rated LED point of light ideally suited for a range of direct-view and beacon applications.



| Type                                                                | MRP (INR)  |
|---------------------------------------------------------------------|------------|
| ArchiPoint iColor Powercore, Translucent Dome Lens, 100-240V, UL/CE | On request |
| ArchiPoint iColor Powercore, Clear Flat Lens, 100-240V, UL/CE       | On request |

## Flex

Cover almost any structure with flexible strands of bright LED nodes. Flex means maximum flexibility. Strands of efficient, addressable Flex nodes can be arranged along a nearly limitless array of surfaces and unconventional structures. Our proven Flex family of direct-view LED luminaires can do it all—from displaying messages on curved building façades to bringing stunning LED light shows to stadium roofs.



| Type                                                          | MRP (INR)  |
|---------------------------------------------------------------|------------|
| FLEX COMPACT GEN3, RGB, 50 NODE, 4 in On-Centre Node Spacing  | on request |
| FLEX COMPACT GEN3, RGB, 50 NODE, 12 in On-Centre Node Spacing | on request |
| FLEX MICRO GEN3, RGB, 50 NODE, 4 in On-Centre Node Spacing    | on request |
| FLEX MICRO GEN3, RGB, 50 NODE, 12 in On-Centre Node Spacing   | on request |

#Available in Clear & Translucent lens options

## Accent Compact

This family of direct view linear LED luminaires is ideally suited for displaying large-scale video, graphics, and intricately designed effects.



| Type                                                                | MRP (INR)  |
|---------------------------------------------------------------------|------------|
| iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Translucent Lens | On request |
| iColor Accent Compact, RGBW, Ethernet, 1.2M (4ft), Clear Flat Lens  | On request |

## PureStyle Compact\*\*

Innovative PureStyle Compact Powercore luminaires bring lighting professionals high output in a compact, easily concealed luminaire. PureStyle Compact delivers exceptionally high-quality light for a wide range of interior applications from cove to wall-washing to backlighting and beyond. PureStyle Compact is designed for tight niches where color mixing directly out of the luminaire is important.



| Type                                   | MRP (INR)  |
|----------------------------------------|------------|
| PureStyle Compact, Intellihue, HO, 1ft | On request |
| PureStyle Compact, Intellihue, HO, 4ft | On request |
| PureStyle Compact, Intellihue, LO, 1ft | On request |
| PureStyle Compact, Intellihue, LO, 4ft | On request |

\*\* Also available in RGBW version



Atal Bridge, Gujarat

## Uniflood

### Uniflood C Pro

Uniflood C Pro is a circular shaped, exterior-rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white with DMX512/RDM control options.



| Type                                 | MRP (INR)  |
|--------------------------------------|------------|
| Uni Flood C Pro Compact ( 24 W)      | On request |
| Uni Flood C Pro Small ( 15W - 50W )  | On request |
| Uni Flood C Pro Medium ( 45W- 100 W) | On request |
| Uni Flood C Pro Large ( 80W - 150W ) | On request |

### Uniflood M G2

Flood M G2 is a modular, rectangular shaped exterior rated architectural LED floodlight that is designed for façade, landscape and outdoor flood lighting applications like; illuminating multi-story exterior facades, bridges, landmarks and monuments. Available in white, monochromatic colors, RGB, RGBW and tunable white with DMX512/RDM control options.



| Type                                  | MRP (INR)  |
|---------------------------------------|------------|
| Uniflood M G2 Single Head (24W-150W)  | On request |
| Uniflood M G2 Double Head (200W-300W) | On request |
| Uniflood M G2 Triple Head (360W-450W) | On request |

### Controllers/Power Supplies/ Keypads/Softwares



| Type                                                                 | MRP (INR)  |
|----------------------------------------------------------------------|------------|
| Controller, VSM Pro SSD, DVI                                         | On request |
| Controller, VSM Pro SSD, Composite                                   | On request |
| Controller, Light System Manager (Gen 5) 15000 Node                  | On request |
| Controller, Iplayer 3/Colorplay 3, EU Cable                          | On request |
| Controller, Iplayer3 Serial Keypad, White                            | On request |
| Controller, Iplayer3 Aux Box, Universal Power                        | On request |
| Colordial Pro                                                        | On request |
| Ethernet Switch with POE Ports For Use with Colordial2               | On request |
| Power Over Ethernet Injector W/ EU Line Cord                         | On request |
| Controller, iColor Communication Module                              | On request |
| iColor Player                                                        | On request |
| Controller, Smartjack Pro                                            | On request |
| Multi-Protocol Converter                                             | On request |
| Controller, Activesite Gateway                                       | On request |
| AntumbraButton Ethernet Keypad Communication Module                  | On request |
| AntumbraButton Application Module-Facia (Ordered via Dynalite Codes) | On request |

## UniStrip G4 AC

UniStrip G4 (AC) is a surface mounted, exterior-rated LED linear flood light luminaire that is designed for wall washing and grazing architectural lighting applications like; illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white with different lengths (300mm, 500mm, 520m & 1000mm).



| Type                             | MRP (INR)  |
|----------------------------------|------------|
| UniStrip G4 AC BCP383 (15W-50W)  | On request |
| UniStrip G4 AC BCP384 (20W-80W)  | On request |
| UniStrip G4 AC BCP385 (50W-120W) | On request |

## UniEdge


UniEdge is a surface mounted, exterior-rated and compact sized architectural LED edge lighting luminaire that is designed for façade and outdoor decorative lighting applications. The robust mechanical and unique optical designs make UniEdge ideal for edges lighting on windows, building façades, landmarks and monuments. Available in white, RGB, RGBW and tunable white.



| Type                           | MRP (INR)  |
|--------------------------------|------------|
| BCP390 4LED RGBNW 24V 3x90 DMX | On request |
| BCP390 4LED 30K 24V 3x90 DMX   | On request |
| BCP390 4LED 27K 24V 3x90 DMX   | On request |

## UniStrip G4 DC

UniStrip G4 (DC) is a surface mounted, exterior-rated LED linear flood light luminaire that is designed for wall washing and grazing architectural lighting applications like; illuminating buildings facades, bridges, overpasses and any application that requires a linear lighting solution. Available in white, monochromatic colors, RGB, RGBW and tunable white with different lengths (300mm, 500mm, 520m & 1000mm).



| Type                           | MRP (INR)  |
|--------------------------------|------------|
| UniStrip G4 DC BCP386(3W-15W)  | On request |
| UniStrip G4 AC BCP381 (6W-24W) | On request |
| UniStrip G4 AC BCP382 (9W-36W) | On request |

## UniBar

UniBar is a exterior rated and slim sized direct view luminaire designed for outdoor architectural lighting and media façade application.



| Type                             | MRP (INR)  |
|----------------------------------|------------|
| UniBar Small BCS 340 (3W - 12W)  | On request |
| UniBar Medium BCS 341 (4W - 15W) | On request |
| UniBar Large BCS 342(7.5W - 24W) | On request |

## UniDot

UniDot G2 is a surface mounted, exterior-rated and compact sized architectural LED direct view dot lighting luminaire designed for façade and outdoor lighting applications.



| Type                        | MRP (INR)  |
|-----------------------------|------------|
| UniDot G2 Small BGS 300 3W  | On request |
| UniDot G2 Medium BGS 301 6W | On request |
| UniDot G2 Large BGS 302 9W  | On request |

#Available in white, monochromatic colors, RGB, RGBW and Tunable White

### Notes

- Please choose correct system configuration. (Only Philips employees/authorised value added partners & system integrators should be consulted).
- GST extra as applicable in case of discounts considered on MRP.
- Installation, testing & commissioning extra as applicable.
- AMC available on request.
- Automatic voltage stabilizer & external SPD is recommended for all architectural lighting luminaires to claim the warranty.
- The company reserves the right to discontinue / add new variants in the product range.

UNILinear Flex IP68


UNILinear Flex is IP68 cove lighting with reliable performance and excellently water-proof, anti-dust LED strips with professional design for vivid colors.



| Type                      | HSN Code | MRP (INR) |
|---------------------------|----------|-----------|
| BGC301 RGB L5000          | 9405     | 27,000/-  |
| BGC301 1200LM 5000K L5000 | 9405     | 26,000/-  |
| BGC301 1200LM 4000K L5000 | 9405     | 26,000/-  |
| BGC301 1100LM 3000K L5000 | 9405     | 24,000/-  |
| BGC301 1100LM 2500K L5000 | 9405     | 24,000/-  |
| BGC301 800LM 5000K L5000  | 9405     | 22,000/-  |
| BGC301 800LM 4000K L5000  | 9405     | 22,000/-  |
| BGC301 800LM 3000K L5000  | 9405     | 22,000/-  |
| BGC301 800LM 2500K L5000  | 9405     | 22,000/-  |
| BGC301 400LM 5000K L5000  | 9405     | 18,500/-  |
| BGC301 400LM 4000K L5000  | 9405     | 18,500/-  |
| BGC301 400LM 3000K L5000  | 9405     | 18,500/-  |
| BGC301 400LM 2500K L5000  | 9405     | 18,500/-  |
| ZGC301 MOUNTING KIT MONO  | 9405     | 1,550/-   |
| ZGC301 MOUNTING KIT RGB   | 9405     | 1,885/-   |
| ZGC 301 IP connector      | 9405     | 790/-     |

Make your landmark shine with a swipe on your smartphone

Cloud-based control

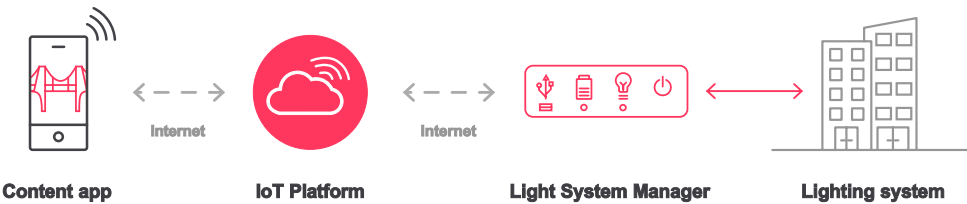

New Parliament House, New Delhi



Qutub Minar, New Delhi



Durga Mandir, Uttar Pradesh



Brihadeswara Temple, Tamil Nadu

Signify offers a variety of offgrid and hybrid solar propositions catering to the needs of urban, semi-urban as well as rural communities.



Street Lighting  
All-in-One




Street Lighting  
High Lumen  
Non-integral



Street Lighting  
Low Lumen  
Non-integral




Street Lighting  
High Lumen  
Non-integral



City Beautification



Flood Lighting



PV Panel  
Subsystem



Combo Charge  
Controllers



Battery  
Subsystem



Indoor Systems



Portable Lanterns

# Solar Lighting



## SunStay

Integrated all-in-one solar street light with lithium ferro phosphate battery, solar panel and charger built into the luminaire. Pressure die-cast aluminium for sturdiness and long life. Specially designed pole mounting bracket allows different tilt angles, lateral and pole top mounting. SunStay has highest ever system efficacy of more than 175lm/W.



| Offgrid                                                      | HSN Code | MRP (INR) |
|--------------------------------------------------------------|----------|-----------|
| BRP710 LED20 CW MR S1 12V LFP AIO Solar Equip IN-with Sensor | 94055040 | 65,000/-  |
| BRP710 LED30 CW MR S1 12V LFP AIO Solar Equip IN-with Sensor | 94055040 | 86,000/-  |
| BRP710 LED45 CW MR S1 12V LFP Solar IN - with Sensor         | 94055040 | 96,000/-  |

CCT option: 3000K and 4000K. Option available without sensor. Option available with fixed dimming profile.

## SunStay BLE

In addition to features of Sunstay, Sunstay BLE has feature of configuring lumen output, dimming profile at site with an Android app, sensor can be enabled or disabled depending on site requirement. Critical parameters for battery, panel and load can be read from individual luminaires giving insights into functioning of different subsystems.



| SunStay BLE                              | HSN Code | MRP (INR)  |
|------------------------------------------|----------|------------|
| BRP710 LED20 CW 28PO PDIM50 BLE SOLAR IN | 94055040 | 75,000/-   |
| BRP710 LED20 CW 35MO PDIM50 BLE SOLAR IN | 94055040 | 86,500/-   |
| BRP710 LED30 CW 35MO PDIM30 BLE SOLAR IN | 94055040 | 90,000/-   |
| BRP710 LED30 CW 60MO PDIM30 BLE SOLAR IN | 94055040 | 93,000/-   |
| BRP710 LED45 CW 60MO PDIM30 BLE SOLAR IN | 94055040 | 1,25,000/- |

## Sunstay Hybrid

Hybrid SunStay powered by solar energy and at the same time connected to the electric grid. In case of abundant sunlight, it uses solar energy and otherwise it draws energy from the grid.



| Hybrid                                | HSN Code | MRP (INR)  |
|---------------------------------------|----------|------------|
| BRP710 LED20 CW MR HY SOLAR IN        | 94055040 | 83,000/-   |
| BRP710 LED20 CW MR HY FDIM50 SOLAR IN | 94055040 | 85,000/-   |
| BRP710 LED30 CW MR HY SOLAR IN        | 94055040 | 92,750/-   |
| BRP710 LED30 CW MR HY FDIM50 SOLAR IN | 94055040 | 98,750/-   |
| BRP710 LED45 CW MR HY SOLAR IN        | 94055040 | 1,05,000/- |
| BRP710 LED45 CW MR HY FDIM50 SOLAR IN | 94055040 | 1,10,000/- |
| BRP710 LED60 CW MR HY FDIM20 SOLAR IN | 94055040 | 1,25,000/- |

CCT option: 3000K and 4000K

## Standalone LED Street Lighting System

Ideal for remote, rural and sub urban locations with no electricity. Also suitable for different low wattage, offgrid, solar outdoor applications driven by clean energy initiatives.



## SmartBright Solar: Street Lighting Range

Complete system comprises of luminaire with inbuilt charge controller, battery, PV panel and pole and mounting accessories



|                                                       |          |            |
|-------------------------------------------------------|----------|------------|
| Standalone solar lighting system from 900-2100 lumens | 94055040 | On request |
|-------------------------------------------------------|----------|------------|

\* Actual product image may vary depending on the luminaire type / wattages.

## GreenLine V2 Solar

Complete system comprises of configurable luminaire with inbuilt charge controller, battery, PV panel and pole and mounting accessories.



| Offgrid / Hybrid                                       | HSN Code | MRP (INR)  |
|--------------------------------------------------------|----------|------------|
| Standalone solar lighting system from 1600-5000 lumens | 94055040 | On request |

\* Actual product image may vary depending on the luminaire type / wattages.

## All-in-one Solar Street Light

All-in-one solar street light range up-to 12000 lumen with inbuilt lithium ferro phosphate batteries, monocrystalline solar panel and MPPT charge controller.

| Offgrid           | MRP (INR)  |
|-------------------|------------|
| BRP111 LED20/757  | 45,000/-   |
| BRP111 LED30/757  | 55,000/-   |
| BRP111 LED50/757  | 77,000/-   |
| BRP111 LED85/757  | 1,10,000/- |
| BRP111 LED120/757 | 1,60,000/- |



## AIO Gen2 Hybrid

Hybrid AIO Gen2 powered by solar energy and at the same time connected to the electric grid. In case of abundant sunlight, it uses solar energy and otherwise it draws energy from the grid.

| Offgrid                      | MRP (INR)  |
|------------------------------|------------|
| BRP111 LED20/757 M Solar HY  | 54,000/-   |
| BRP111 LED30/757 M Solar HY  | 64,500/-   |
| BRP111 LED50/757 M Solar HY  | 85,000/-   |
| BRP111 LED85/757 M Solar HY  | 1,25,000/- |
| BRP111 LED120/757 M Solar HY | 1,65,000/- |



Option with sensor available in hybrid version on request

## UrbanSpark

UrbanSpark is integrated solar post top lantern with lithium ferro phosphate battery with vertically mounted panels on all four sides to catch sunlight throughout the day. Choice of street light and post top optics.

| Type                                        | HSN Code | MRP (INR)  |
|---------------------------------------------|----------|------------|
| UrbanSpark post top with 4m integrated pole | 94055040 | On request |
| UrbanSpark with 6m integrated pole          | 94055040 | On request |



## Non Integral - Flood Light solution

Solar powered outdoor flood lighting solution with system efficacy >170lm/watt. Reliable and long life makes this solution effective in fulfilling our present and future lighting requirements of road width upto 8-12 meter.



| Type                                                     | HSN Code | MRP (INR)  |
|----------------------------------------------------------|----------|------------|
| System configurable option with BP483 up to 17000 lumen  | 94055040 | On request |
| System configurable option with BVP485 up to 25800 lumen | 94055040 | On request |

## Gen 4.0 Solar Standalone Street Light System: Offgrid and Hybrid

Complete range of configurable and connected solar street lights upto 24000 lumens. Suitable for major, intermediate and minor roads for new points as well as grid connected renovation projects.



| Type                                        | HSN Code | MRP (INR)  |
|---------------------------------------------|----------|------------|
| System Configurable Option upto 8000 Lumen  | 94055040 | On request |
| System Configurable Option upto 13000 Lumen | 94055040 | On request |
| System Configurable Option upto 24000 Lumen | 94055040 | On request |

## Solar UFO Posttop

UFO is integrated all-in-one solar posttop with lithium ferro phosphate battery, solar panel and charger built into luminaire itself. It has feature of selecting color temperature with the help of remote and has inbuilt microwave sensor.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| BPC010 LED20/MCT Solar post top IN | 94055040 | 18,000/-  |
| BPC010 LED30/MCT Solar post top IN | 94055040 | 20,000/-  |
| BPC010 LED40/MCT Solar post top IN | 94055040 | 23,000/-  |
| BPC010 LED50/MCT Solar post top IN | 94055040 | 31,000/-  |

## In-house Software Suite



### System Manager

End user software & dashboard



### System Builder

Configuration & software tool



### Control App

Mobile control

## Network Lighting Controls

Philips Dynalite creates sophisticated, reliable, and energy-efficient lighting control solutions for residential, offices, retail, hospitality, industry, stadiums, public spaces, and more.

| Type                                                                      |                                                                                     |
|---------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| DDBC120-DALI MultiMaster DALI Driver Controller                           |    |
| DDBC320-DALI DALI Driver Controller                                       |                                                                                     |
| DDBC516FR Signal Dimmer Controller                                        |                                                                                     |
| DDRC420FR Relay Controller                                                |                                                                                     |
| DDRC1220FR-GL Relay Controller                                            |                                                                                     |
| DDLE802 Leading Edge Dimmer Controller                                    |                                                                                     |
| DDMC802 Multipurpose Modular Controller                                   |  |
| DUS360CR Multifunction Sensor                                             |                                                                                     |
| DUS804CS-UP Multifunction Sensor Ultrasonic                               |                                                                                     |
| DUS90AHB-DALI Multifunction Sensor -Aisleway high bay DALI network sensor |  |
| SNS401CMP Wireless Group Controller                                       |                                                                                     |
| Antumbra Button/ Touch/Display Keypad                                     |                                                                                     |
| PDTS Networked Touchscreen                                                |                                                                                     |
| PDEG Ethernet Gateway                                                     |                                                                                     |
| DDNG-BACnet BACnet Network Gateway                                        |                                                                                     |
| PDZG-E ZigBee Gateway                                                     |                                                                                     |
| DLLI8I8O Dry Contact Interface                                            |  |
| DDFCUC010 Fan Coil Unit Controller                                        |                                                                                     |

## Standalone Sensors

### LRM1071

OccuSwitch is a movement detector with a build-in switch. It will switch off the lights in a room or area when it is vacated and thus save energy. It can switch any load up to 6A and control an office area of around 20sqm for small movement (e.g. desk work) and around 50sqm for large movement (e.g. walking). It is smart daylight sensing technology offers additional saving through daylight override and daylight switching.



| Type                                      | MRP (INR) |
|-------------------------------------------|-----------|
| LRM1071/10 - OccuSwitch Movement Detector | 4,000/-   |

### LCM1601

Ecoset OccuSwitch is movement detector which is easy to install and supports both recessed and surface installation. There is no need for extra components for mounting. It will switch off the lights in a room or area when it is vacated and thus save energy. It can support upto 800W load at normal operation mode and upto maximum inrush current of 80A.



It is suitable for mounting height of 2.5m – 4m and detection radius of 3m and has features of adjusting daylight, holdtime and detecting angle

| Type                                   | MRP (INR) |
|----------------------------------------|-----------|
| LCM1601 - OccuSwitch Movement Detector | 2,500/-   |

#### Terms & Conditions

- Price for network controls can be shared on request
- Please choose correct system configuration/Components for Network controls. (Only Philips Employees/Authorised Value Added Partners & System Integrators should be consulted).
- GST Extra as applicable in case of discounts considered on MRP.
- Warranty 1 year against manufacturing defects.
- Installation, Testing & Commissioning Extra as applicable.
- AMC available on request.
- The company reserves the right to discontinue/add new variants in the product range.



LED Lamps

## LEDTube Range

LED tube range integrates LED light source with frosted cover design into traditional linear fluorescent form delivering 50- 60%\* energy saving.



| Essential LEDTube Range                   | HSN Code | MRP (INR) |
|-------------------------------------------|----------|-----------|
| Essential LEDTube 1200mm 20W/865 T8 IND I | 8539     | 400/-     |
| Essential LEDTube 20W B2B 865 T8          | 8539     | 500/-     |

| Master LEDTube Range                           | HSN Code | MRP (INR) |
|------------------------------------------------|----------|-----------|
| Mas LEDTube 9w, 900lm, 865 T8                  | 8539     | 600/-     |
| Mas LEDTube 14W/2100lm 865 (<10%THD)           | 8539     | 900/-     |
| Mas LEDTube 1200mm, 13W 865 T8 I IN30 – 1600lm | 8539     | 700/-     |
| Mas LEDTube 18W, 2100lm 865 T8 (VE)            | 8539     | 700/-     |
| Mas LEDTube 1200mm 18W 865 T8 I – 2100lm       | 8539     | 800/-     |
| Mas LEDTube 1200mm 18W 865 TEX                 | 8539     | 800/-     |
| Mas LEDTube 18W, 865 T8 I – 1800lm             | 8539     | 700/-     |
| Mas LEDTube 30W, 4000lm, 865 T8                | 8539     | 1,300/-   |
| Mas LEDTube 30W/4000lm 865 DS                  | 8539     | 1,300/-   |
| Mas LEDTube 16W/2100lm 865 Motion Sensor       | 8539     | 1,300/-   |

## LED PL-L 18W

Cost effective and easy way to move to LED without changing the 2'x2' conventional fittings.



| Type                     | HSN Code | MRP (INR) |
|--------------------------|----------|-----------|
| LED PL-L 18W, 6500K 2G11 | 8539     | 599/-     |

## Master LEDspot ExpertColor MV Range

Master LEDspot MV ExpertColor creates a warm and comfortable ambience for hospitality venues, homes and restaurants. It creates ambience with superior lighting that has a customised spectrum, high CRI and deep dimming features. The result being a beautiful lighting experience. The innovative, trimless lens design will also suit almost any interior decor with its clean and neat look. In addition, you can take advantage of the full ExpertColor family, which also includes LEDspot LV and LEDspot Par lamps.



| Type                                     | HSN Code | MRP (INR) |
|------------------------------------------|----------|-----------|
| MAS LED MR16 ExpertColor 6.7-50W 927 10D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 930 10D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 940 10D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 927 24D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 930 24D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 940 24D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 927 36D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 930 36D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 940 36D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 927 60D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 930 60D | 9290     | 2,299/-   |
| MAS LED MR16 ExpertColor 6.7-50W 940 60D | 9290     | 2,299/-   |

## Essential LEDspots MR16 /GU10 Lamps

Essential LEDspots MR16/GU10 are compatible with most existing fixtures with a GU5.3 socket and are designed as a retrofit replacement for halogen spots. Essential LEDspots MR16/GU10 deliver significant energy savings and minimize initial investment.



| Type                               | HSN Code | MRP (INR) |
|------------------------------------|----------|-----------|
| Essential LED 4.6-50W GU10 827 36D | 8539     | 399/-     |
| Essential LED 4.6-50W GU10 830 36D | 8539     | 399/-     |
| Essential LED 4.6-50W GU10 865 36D | 8539     | 399/-     |
| MR16 4.5-50W 830/865               | 8539     | 299/-     |


# Transforming India, Illuminating Heritage

Delivering a wide range of high-performance professional LED lighting systems, empowering lighting professionals around the world to achieve their unique visions.


Rashtrapati Bhavan, New Delhi




Vishwanath Temple, Uttar Pradesh

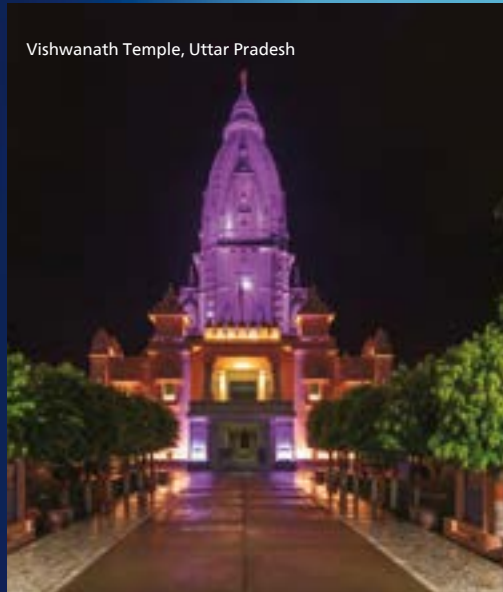

India Gate, New Delhi

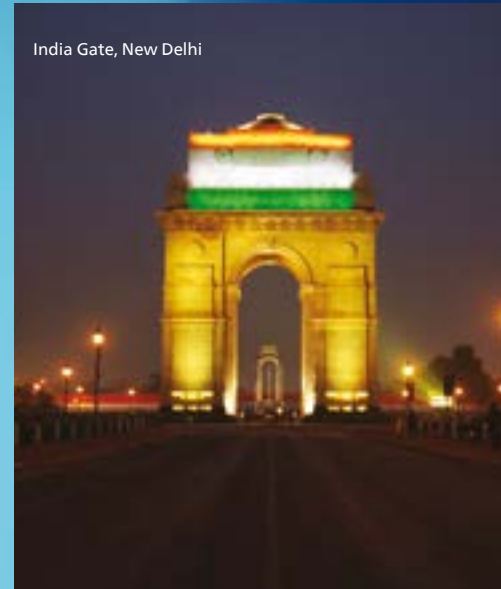

Kusum Sarovar, Vrindavan

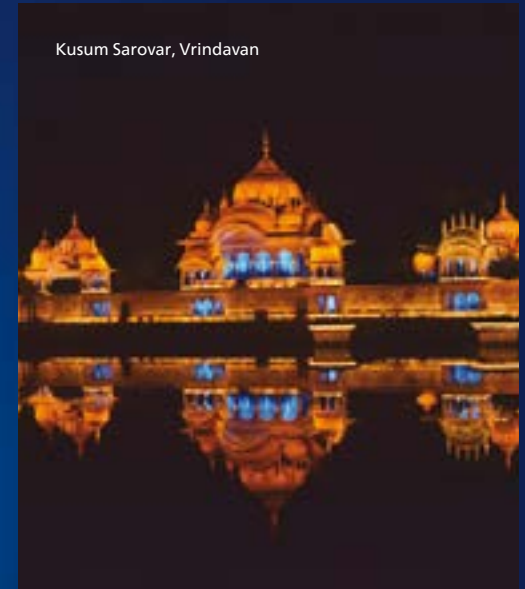

[www.colorkinetics.com/global](http://www.colorkinetics.com/global)



ColorGraze MX Powercore



iColor Accent Compact



ArchiPoint iColor Powercore



ReachElite-Long-throw floodlight

## Abbreviation

- 1. Product family code**  
SP790P | SP780P | SP783P | RC380B  
DN296B | RS361B | SP320P | BY615P  
BN308C | WT150C | BRP505 | BVP485  
BGP564 | BVP374 | BRP710
- 2. System output**  
LED100S: 10,000 Lumen  
LED130S: 13,000 Lumen  
LED160S: 16,000 Lumen
- 3. Color temperature**  
CW/CDL: 6500K/5700K  
NW:4000K  
WW:3000K
- 4. Optics (Indoor)**  
NB: Narrow Beam 60°  
WB: Wide beam 110°  
SK: Symmetric beam  
AK: Asymmetric beam
- 5. Optics (Outdoor Product)**  
R3C: Optics for main road  
R3N: Optics for Narrow Road  
SY5: Symmetric Beam Optics  
SLA: Street Light Optics A Class  
SLC: Street Light Optics C Class  
SWB: Symmetric Wide Beam  
AWB: Asymmetric Wide Beam  
NB: Narrow Beam  
AK: Asymmetric Beam
- 6. Optics (Retail)**  
NB: Narrow Beam  
MB: Medium Beam  
WB: Wide Beam
- 7. Controls**  
PSU: Fixed output  
PSD: DALI Dimmable  
0-10V - Analogue Dimmable

8. Phase:
  - 1C: Single Circuit
  - 3C: Triple Circuit
9. Variant
  - V1: Version 1
  - V2: Version 2
10. Width (Appx. Dimension)
  - W6: 60mm Width
  - W7: 70mm Width
  - W30: 300mm width
  - W60: 600mm width
11. Length (Appx. Dimension):
  - L120: 1200mm length
  - L60: 600mm Length
  - L30: 300mm length
  - L1000: 1000mm length
  - L2000: 2000mm length
12. Front Cover
  - FG: Toughened Extra clear flat glass
  - PC: Polycarbonate cover
  - OD: Opal diffuser
  - OC- Office Compliant Diffuser
13. Luminaire Color
  - SI: Silver color
  - GR: Grey color
  - WH: White color
  - BK: Black color

## Notes

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]

## South

### CHENNAI

#### **Signify Innovations India Limited**

3rd Floor, C-Block, Sunny Side, Shafee  
Mohammed Road, Off Greams Road  
Chennai - 600 006  
Tel: 044 66074000/4020

### BANGALORE

#### **Signify Innovations India Limited**

Mfar Greenheart, Level 7, Manyata Tech  
Park, Hebbal Outer Ring Road,  
Bangalore - 560045  
Tel: 080 67819730

### HYDERABAD

#### **Signify Innovations India Limited**

Level 1, MB Towers, Road No 10,  
Banjara Hill, Hyderabad - 500034  
Tel: 040 46464828

## East

### KOLKATA

#### **Signify Innovations India Limited**

PS Arcadia Central, 3A, 3rd Floor,  
4A, Abanindranath Thakur Sarani  
(Camac Street) Kolkata - 700017  
Tel: 033 66297000

## West

### MUMBAI

#### **Signify Innovations India Limited**

Boomerang, B2 Wing,  
5th Floor, Unit No. 506,  
Chandivali Farm Road,  
Near Chandivali Studio,  
Andheri (East), Mumbai - 400072  
Tel: 91 22 6691 2000

## North

### GURGAON

#### **Signify Innovations India Limited**

9th Floor, DLF - 9B, DLF Cyber City  
DLF Phase 3, Gurgaon - 122002  
Tel: 91 124 460 6000

For any lighting service request you can reach out through

**Toll-free Number: 1800 103 5977**

**SMS: Send 'COMP' to 56363** - Our representative will call back

**Email: [lighting.india@philips.com](mailto:lighting.india@philips.com) or**

**Chat & Mail: [www.lighting.philips.co.in](http://www.lighting.philips.co.in) - Support/Contact us/Chatnow/Email**



© 2019 Koninklijke Philips N.V. All rights reserved.  
Reproduction in whole or in part is prohibited. Owing to continuous  
innovation and improvement, Philips India reserves the right to make  
changes in the data/details without prior notice. Care has been taken to  
ensure that the information contained within is correct.