

2016 EDITION
THE HANDBOOK

CABLE SALES
T 1300 CABLES
W olex.com.au

HEAD OFFICE
15/300 La Trobe Street
Melbourne VIC 3000



75 YEARS

OF BRINGING ENERGY TO AUSTRALIAN LIVES.

Nexans is recognised worldwide as an expert in the cable industry. Our technological leadership, global foot print and local representation allows us to meet the needs of unique global markets whilst maintaining the highest levels of performance, safety and respect for the environment.

OLYMPIC TYRES

1940 PIONEERS CABLE
MANUFACTURING
IN VICTORIA

1948

NYLEX

OPENS CABLE PLANT
IN LILYDALE



1956 TOTTENHAM PLANT
WAS BUILT



1973
OLYMPIC AND
NYLEX MERGE
TO FORM OLEX
CABLES

2006

OLEX JOINS
NEXANS GLOBAL
TO FORM
NEXANS OLEX

CONTENTS

LOW VOLTAGE		
1 Core	PVC Insulated	6
1 Core	PVC SDI	7
1 Core	XLPE/PVC Single Core	8-9
2 & 3 Core	PVC Flat	10
2 & 3 Core+Earth	PVC Flat	11
2 & 3 Core+Earth	PVC Circular	12
4 Core+Earth	PVC Circular	13
2 & 3 Core+Earth	XLPE/PVC Multicore	14
4 Core+Earth	XLPE/PVC Multicore	15
2 & 3 Core+Earth	PVC SWA Circular	16
4 Core+Earth	PVC SWA Circular	17
2 & 3 Core+Earth	XLPE/PVC SWA Multicore	18
4 Core+Earth	XLPE/PVC SWA Multicore	19
Multicore+Earth	PVC Control	20
Multicore+Earth	PVC SWA Control	21
4 Core	XLPE URD Power	22
2, 3 & 4 Core	XLPE Aerial Bundled	23

FLEXIBLE POWER		
2 Core, 2, 3 & 4 Core+Earth	Powerlex™ PVC OD Cords	26
1 Core, 2 & 3 Core+Earth	Powerlex™ PVC HD Cords	27
1 Core, 2, 3 & 4 Core+Earth	Versolex® HD Single Cord and Multicore	28
3 Core+Earth	Varolex® VSD/EMC	29

FIRE PERFORMANCE		
Alsecure Envirolex		
1 Core	Flexible	33
Alsecure Plus		
1 Core	Flexible	36
Multicore	Flexible	37
Alsecure Premium		
1 Core	Flexible	40
Multicore	Stranded	41

DATA/COMMUNICATIONS	
Security	44
Audiorex	45
Figure 8	45
LAN	46
Coaxial	47
Telephone Internal	47
Optical Fibre	48
Gardolex® PVC Garden Lighting	49
Detonating	49
Fire Alarm	50
Data	51
Composite	52
Traffic	53
Instrolex® Instrumentation	54
Instrolex® Instrumentation SWA	56
Instrolex® Triples	58
Instrolex® Triples SWA	59

CURRENT RATINGS/GENERAL INFORMATION	
2 x 1 Core PVC	61
2 x 1 Core XLPE	62
2 x 1 Core 110°C	63
2 Core PVC	64
2 Core XLPE	65
2 Core 110°C	66
3 x 1 Core PVC	67
3 x 1 Core XLPE	68
3 x 1 Core 110°C	69
3 & 4 Core PVC	70
3 & 4 Core XLPE	71
3 & 4 Core 110°C	72
Flexible Cords	73
Welding Cables	74
Aluminium Aerial	75
Copper Aerial	76
Cable Selection	77
Cable Installation	79
General Data	80
General Data – Useful 3 phase formula	82
General Data	83
Alco Metal Cable Glands	EMC, UW, HUW, AW, HAW
	88-91
Alco Earth Tags – Nickel Plated	92
Alco Gland Shrouds	93
The Nexans Olex Cable Range	94
Abbreviations	96
Locations	97
Handbook Subscription	98



LOW VOLTAGE

Nexans
Olex

FEATURES AND BENEFITS

Nexans Olex PVC Compound (V-90)

Easy strip for fast and consistent stripping
GBCA PVC Best Practice Accredited helping you contribute points to the green star rating of your building

Nexans Olex XLPE

All the benefits of PVC plus:
Higher current carrying capacity
Thinner and more lightweight

Nexans Olex Copper

Optimum conductivity for smallest conductor sizes

Nexans Olex Aluminium

Lightweight
Easy to handle

Steel Wire Armour

Added mechanical strength

PVC Bedding

Added mechanical strength between inner and outer layers

Core Colouring

Easy identification of cores

Labelling

Easy identification of cable make, size, and metre marked for installer record


Filler

Maintains shape of cable for consistent feel

Tape

Reduced bonding between layers for easy stripping

Nexans Olex has a proud history of cable manufacturing expertise, with more than half a century of experience in the industry. Offering a comprehensive range of low voltage power and control cables, Nexans Olex has the cable you need.



PVC INSULATED



Single core copper conductors, 0.6/1kV V-90 insulated to AS/NZS 5000.1 (unsheathed), 90°C.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	kg/100m	
0.5	Solid	0.8	2.4	1.0	BAAP01AA001
1.0	Solid	0.8	2.8	1.6	BAAP02AA001
1.0	Stranded	0.8	2.8	1.5	BAAP03AA001
1.5	Stranded	0.8	3.1	2.0	BAAP05AA001
2.5	Stranded	0.8	3.6	3.2	BAAP07AA001
4	Stranded	1.0	4.5	5.1	BAAP09AA001
6	Stranded	1.0	5.1	7.1	BAAP11AA001
10	Stranded	1.0	6.0	11	BAAP13AA001
16	Stranded	1.0	6.9	17	BAAP15AA001
25	Compacted	1.2	8.4	26	BAAC17AA001
35	Compacted	1.2	9.4	35	BAAC18AA001
50	Compacted	1.4	10.9	48	BAAC19AA001
70	Compacted	1.4	12.4	67	BAAC20AA001
95	Compacted	1.6	15.2	96	BAAC22AA001
120	Stranded	1.6	17.3	118	BAAP23AA001
150	Stranded	1.8	18.8	144	BAAP24AA001
185	Stranded	2.0	21.1	180	BAAP25AA001
240	Compacted	2.2	24.1	236	BAAP26AA001
300	Stranded	2.4	26.9	296	BAAP27AA001
400	Stranded	2.6	30.6	376	BAAP28AA001
500	Stranded	2.8	34.1	477	BAAP30AA001
630	Stranded	2.8	37.8	613	BAAP32AA001
Single Core PVC Insulated Copper Earth Conductor					
1.5	Stranded	0.6	2.7	1.8	AATP05AA001
2.5	Stranded	0.7	3.4	3.0	AATP07AA001


PVC SDI



Single core copper conductors, 450/750V V-90 insulated to AS/NZS 5000 and AS/NZS 5000.2, 90°C.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm	kg/100m	
1.0	Stranded	0.6	0.8	4.0	2.7	AABP02AA001
1.5	Stranded	0.6	0.8	4.4	3.2	AABP05AA001
2.5	Stranded	0.7	0.8	5.1	4.8	AABP07AA001
4	Stranded	0.8	0.9	6.0	7.1	AABP09AA001
6	Stranded	0.8	0.9	6.6	9.4	AABP11AA001
10	Stranded	1.0	0.9	7.8	14	AABP13AA001
16	Stranded	1.0	1.0	8.9	21	AABP15AA001


XLPE/PVC SINGLE CORE



Single core copper conductors, 0.6/1kV X-90 insulated, PVC sheathed to AS/NZS 5000.1, 90°C.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm	kg/100m	
Copper Conductor						
16	Stranded	0.8	1.4	9.3	21	BDBP15AA001
25	Compacted	0.9	1.4	10.5	30	BDBC17AA001
35	Compacted	0.9	1.4	11.5	40	BDBC18AA001
50	Compacted	1.0	1.4	12.9	52	BDBC19AA001
70	Compacted	1.1	1.4	14.7	73	BDBC20AA001
95	Stranded	1.1	1.5	17.2	101	BDBC22AA001
120	Stranded	1.2	1.5	19.6	123	BDBP23AA001
150	Stranded	1.4	1.6	21.3	152	BDBP24AA001
185	Stranded	1.6	1.6	23.5	189	BDBP25AA001
240	Stranded	1.7	1.7	26.6	246	BDBP26AA001
300	Stranded	1.8	1.8	29.4	306	BDBP27AA001
400	Compacted	2.0	1.9	33.3	386	BDBP28AA001
500	Compacted	2.2	2.0	37.0	491	BDBP30AA001
630	Compacted	2.4	2.2	41.4	635	BDBP32AA001

XLPE/PVC SINGLE CORE



Single core aluminium conductors, 0.6/1kV X-90 insulated, PVC sheathed to AS/NZS 5000.1, 90°C.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm	kg/100m	
Aluminium Conductor						
35	Compacted	0.9	1.4	11.8	18	BDBA18AA001
50	Compacted	1.0	1.4	13.1	23	BDBA19AA001
70	Compacted	1.1	1.4	14.9	31	BDBA20AA001
95	Compacted	1.1	1.5	16.8	40	BDBA22AA001
120	Compacted	1.2	1.5	18.4	49	BDBA23AA001
150	Compacted	1.4	1.6	20.5	60	BDBA24AA001
185	Compacted	1.6	1.6	22.4	72	BDBA25AA001
240	Compacted	1.7	1.7	25.1	91	BDBA26AA001
300	Compacted	1.8	1.8	27.6	112	BDBA27AA001
400	Compacted	2.0	1.9	31.1	142	BDBA28AA001
500	Compacted	2.2	2.0	35.3	185	BDBA30AA001
630	Compacted	2.4	2.2	39.5	233	BDBA32AA001

PVC FLAT


2 & 3 core copper conductors, flat, 450/750V V-90 insulated, PVC sheathed to AS/NZS 5000.2, 90°C.



Nom. cond. area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm	kg/100m	
2C						
1.0	Solid	0.6	0.9	6.5 X 4.2	5.0	CACP02AA002
1.5	Stranded	0.6	0.9	7.2 X 4.5	6.2	CACP05AA002
2.5	Stranded	0.7	1.0	8.9 X 5.4	9.7	CACP07AA002
4	Stranded	0.8	1.1	10.5 X 6.3	14	CACP09AA002
6	Stranded	0.8	1.1	11.6 X 6.9	19	CACP11AA002
10	Stranded	1.0	1.2	14.2 X 8.3	29	CACP13AA002
16	Stranded	1.0	1.3	16.3 X 9.5	43	CACP15AA002
3C						
1.5	Stranded	0.6	0.9	9.9 X 4.5	8.8	EACP05AA003
2.5	Stranded	0.7	1.0	12.3 X 5.4	14	EACP07AA003

PVC FLAT WITH EARTH

2 & 3 core+earth copper conductors, flat, 450/750V V-90 insulated, PVC sheathed to AS/NZS 5000.2, 90°C.



Nom. cond. area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Earth cond. area	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm ²	mm	kg/100m	
2C+E							
1.0	Solid	0.6	0.9	1.0	8.9 X 4.2	7.7	CNCP02AA002
1.5	Stranded	0.6	0.9	1.5	9.9 X 4.5	8.9	CNCP05AA002
2.5	Stranded	0.7	1.0	2.5	12.2 X 5.4	14	CNCP07AA002
4	Stranded	0.8	1.1	2.5	13.9 X 6.3	19	CNCP09AA002
6	Stranded	0.8	1.1	2.5	15.0 X 6.9	23	CNCP11AA002
10	Stranded	1.0	1.2	4	18.3 X 8.3	36	CNCP13AA002
16	Stranded	1.0	1.3	6	21.0 X 9.5	52	CNCP15AA002
3C+E							
1.5	Stranded	0.6	0.9	1.5	12.6 X 4.5	12	ENCP05AA003
2.5	Stranded	0.7	1.0	2.5	15.7 X 5.4	18	ENCP07AA003

Note: Product range is available in LSOH materials subject to minimum order quantity and production lead time.

PVC CIRCULAR



2 & 3 core+earth copper conductors, circular, CNHP & ENHP
450/750V V-90 insulated to AS/NZS 5000.2, DNHP & FNHP
0.6/1kV V-90 insulated to AS/NZS 5000.1, PVC sheathed to
AS/NZS 5000.

Nom. cond. area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Earth cond. area	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	mm	mm	mm	kg/100m	
2C+E							
1.5	Stranded	0.6	1.2	1.5	8.5	12	CNHP05AA002
2.5	Stranded	0.7	1.2	2.5	10.0	17	CNHP07AA002
4	Stranded	0.8	1.3	2.5	11.4	23	CNHP09AA002
6	Stranded	0.8	1.3	2.5	12.5	30	CNHP11AA002
1.5	Stranded	0.8	1.8	1.5	10.3	15	DNHP05AA002
2.5	Stranded	0.8	1.8	2.5	11.5	21	DNHP07AA002
4	Stranded	1.0	1.8	2.5	13.1	27	DNHP09AA002
6	Stranded	1.0	1.8	2.5	14.3	34	DNHP11AA002
10	Stranded	1.0	1.8	4	16.1	47	DNHP13AA002
16	Stranded	1.0	1.8	6	18.0	58	DNHP15AA002
50	Stranded	1.4	1.8	16	25.8	141	DNHC19AA002
3C+E							
1.5	Stranded	0.6	1.2	1.5	9.2	14	ENHP05AA003
2.5	Stranded	0.7	1.3	2.5	11.1	21	ENHP07AA003
4	Stranded	0.8	1.3	2.5	12.5	28	ENHP09AA003
6	Stranded	0.8	1.3	2.5	13.6	35	ENHP11AA003
1.5	Stranded	0.8	1.8	1.5	11.1	18	FNHP05AA003
2.5	Stranded	0.8	1.8	2.5	12.5	25	FNHP07AA003
4	Stranded	1.0	1.8	2.5	14.2	33	FNHP09AA003
6	Stranded	1.0	1.8	2.5	15.5	41	FNHP11AA003
10	Stranded	1.0	1.8	4	17.6	60	FNHP13AA003
16	Stranded	1.0	1.8	6	19.7	77	FNHP15AA003
185	Stranded	2.0	2.5	70	51.8	690	FNHP25AA003
240	Compacted	2.2	2.7	95	58.3	915	FNHP26AA003
300	Stranded	2.4	2.9	120	65.9	1128	FNHP27AA003

PVC CIRCULAR



4 core+earth copper conductors, circular, GNHP
450/750V V-90 insulated to AS/NZS 5000.2, HNHP
0.6/1kV V-90 insulated to AS/NZS 5000.1, PVC sheathed to
AS/NZS 5000.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Nominal sheath thickness	Earth cond. area	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	mm	mm	mm	kg/100m	
4C+E							
1.5	Stranded	0.6	1.2	1.5	10.0	16	GNHP05AA004
2.5	Stranded	0.7	1.3	2.5	12.1	26	GNHP07AA004
4	Stranded	0.8	1.4	2.5	13.9	35	GNHP09AA004
6	Stranded	0.8	1.4	2.5	15.1	44	GNHP11AA004
1.5	Stranded	0.8	1.8	1.5	12.0	21	HNHP05AA004
2.5	Stranded	0.8	1.8	2.5	13.5	30	HNHP07AA004
4	Stranded	1.0	1.8	2.5	15.5	40	HNHP09AA004
6	Stranded	1.0	1.8	2.5	17.0	50	HNHP11AA004
10	Stranded	1.0	1.8	4	19.3	73	HNHP13AA004
16	Stranded	1.0	1.8	6	21.6	96	HNHP15AA004
185	Stranded	2.0	2.7	70	58.3	889	HNHP25AA004
240	Stranded	2.2	2.9	95	65.6	1177	HNHP26AA004
300	Stranded	2.4	3.1	120	77.5	1463	HNHP27AA004

XLPE/PVC MULTICORE



2 & 3 core+earth copper conductors, circular, 0.6/1kV X-90 insulated, PVC sheathed to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main conductor type	Nom. insul. thick	Nom. sheath thick	Earth cond. area	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm ²	mm	kg/100m	
2C+E							
16	Stranded	0.8	1.8	6	17.1	52	DTHP15AA002
25	Compacted	0.9	1.8	6	19.3	72	DTHC17AA002
35	Compacted	0.9	1.8	10	21.3	96	DTHC18AA002
50	Compacted	1.0	1.8	16	24.2	129	DTHC19AA002
70	Compacted	1.1	1.8	25	27.8	180	DTHC20AA002
95	Compacted	1.1	1.9	25	31.8	238	DTHC22AA002
120	Stranded	1.2	2.0	35	36.6	299	DTHP23AA002
3C+E							
16	Stranded	0.8	1.8	6	18.6	69	FTHP15AA003
25	Compacted	0.9	1.8	6	20.9	97	FTHC17AA003
35	Compacted	0.9	1.8	10	23.2	132	FTHC18AA003
50	Compacted	1.0	1.8	16	26.5	176	FTHC19AA003
70	Compacted	1.1	1.9	25	30.8	248	FTHC20AA003
95	Compacted	1.1	2.0	25	34.6	333	FTHC22AA003
120	Stranded	1.2	2.1	35	39.7	416	FTHP23AA003
150	Stranded	1.4	2.3	50	44.4	524	FTHP24AA003
185	Stranded	1.6	2.4	70	49.7	655	FTHP25AA003
240	Stranded	1.7	2.6	95	55.7	861	FTHP26AA003
300	Stranded	1.8	2.8	120	62.9	1066	FTHP27AA003

XLPE/PVC MULTICORE



4 core+earth copper conductors, circular, 0.6/1kV X-90 insulated, PVC sheathed to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main conductor type	Nom. insul. thick	Nom. sheath thick	Earth cond. area	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm ²	mm	kg/100m	
4C+E							
16	Stranded	0.8	1.8	6	20.4	88	HTHP15AA004
25	Compacted	0.9	1.8	6	23.1	124	HTHC17AA004
35	Compacted	0.9	1.8	10	25.7	167	HTHC18AA004
50	Compacted	1.0	1.9	16	29.7	225	HTHC19AA004
70	Compacted	1.1	2.0	25	34.4	317	HTHC20AA004
95	Compacted	1.1	2.1	25	38.8	431	HTHC22AA004
120	Stranded	1.2	2.3	35	44.8	542	HTHP23AA004
150	Stranded	1.4	2.4	50	49.9	676	HTHP24AA004
185	Stranded	1.6	2.6	70	56.1	845	HTHP25AA004
240	Compacted	1.7	2.8	95	62.6	1104	HTHP26AA004
300	Stranded	1.8	3.0	120	74.1	1385	HTHP27AA004

PVC SWA CIRCULAR



2 & 3 core+earth copper conductors, circular, 0,6/1kV V-90 insulated, PVC bedded, steel wire armoured, PVC sheathed cable to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main cond. type	Nom. insul. thick.	Earth cond. area	Nom. diam. over bedding	Nom. diam. over armour	Nom. overall diam.	Approx. mass	Product code
mm ²		mm	mm ²	mm		mm	kg/100m	
2C+E								
1.5	Stranded	0.8	1.5	8.7	10.5	14.1	38	DNMP05AA002
2.5	Stranded	0.8	2.5	9.9	11.7	15.4	46	DNMP07AA002
4	Stranded	1.0	2.5	11.5	13.3	17.0	56	DNMP09AA002
6	Stranded	1.0	2.5	13.1	15.6	19.2	77	DNMP11AA002
10	Stranded	1.0	4	15.5	18.0	21.7	101	DNMP13AA002
16	Stranded	1.0	6	16.4	18.9	22.6	110	DNMP15AA002
25	Compacted	1.2	6	18.9	22.1	25.8	151	DNMC17AA002
35	Compacted	1.2	10	20.9	24.1	27.8	184	DNMC18AA002
50	Compacted	1.4	16	24.2	27.4	31.1	231	DNMC19AA002
3C+E								
1.5	Stranded	0.8	1.5	9.5	11.3	15.0	43	FNMP05AA003
2.5	Stranded	0.8	2.5	10.9	12.7	16.3	53	FNMP07AA003
4	Stranded	0.8	2.5	12.6	15.1	18.8	74	FNMP09AA003
6	Stranded	1.0	2.5	14.9	17.4	21.1	92	FNMP11AA003
10	Stranded	1.0	4	17.0	19.5	23.2	118	FNMP13AA003
16	Stranded	1.0	6	18.1	21.3	24.9	146	FNMP15AA003
50	Compacted	1.4	16	26.7	29.9	33.9	292	FNMC19AA003
95	Compacted	1.6	25	35.2	39.2	43.6	517	FNMC22AA003
185	Stranded	2.0	70	49.6	54.6	60.0	969	FNMP25AA003
240	Compacted	2.2	95	56.1	61.1	67.0	1211	FNMP26AA003
300	Stranded	2.4	120	63.2	68.2	74.6	1431	FNMP27AA003

PVC SWA CIRCULAR



4 core+earth copper conductors, circular, 0,6/1kV V-90 insulated, PVC bedded, steel wire armoured PVC sheathed to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main cond. type	Nom. insul. thick.	Earth cond. area	Nom. diam. over bedding	Nom. diam. over armour	Nom. overall diam.	Approx. mass	Product code
mm ²		mm	mm ²	mm		mm	kg/100m	
4C+E								
1.5	Stranded	0.8	1.5	10.4	12.2	15.9	47	HNMP05AA004
2.5	Stranded	0.8	2.5	11.9	13.7	17.4	58	HNMP07AA004
4	Stranded	1.0	2.5	13.9	16.4	20.1	84	HNMP09AA004
6	Stranded	1.0	2.5	16.4	18.9	22.6	107	HNMP11AA004
10	Stranded	1.0	4	18.7	21.9	25.5	151	HNMP13AA004
16	Stranded	1.0	6	20.0	23.2	26.9	172	HNMP15AA004
185	Stranded	2.0	70	56.1	61.1	67.1	1186	HNMP25AA004
240	Compacted	2.2	95	62.9	67.9	74.3	1480	HNMP26AA004
300	Stranded	2.4	120	74.8	81.1	88.0	1929	HNMP27AA004

XLPE/PVC SWA MULTICORE



2 & 3 core+earth copper conductors, circular, 0.6/1kV X-90 insulated, PVC bedded, steel wire armoured, PVC sheathed to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main cond. type	Nom. insul. thick.	Earth cond. area	Nom. diam. over bedding	Nom. diam. over armour	Nom. overall diam.	Approx. mass	Product code
mm ²		mm	mm ²	mm	mm	mm	kg/100m	
2C+E								
16	Stranded	0.8	6	15.5	18.0	21.7	101	DTMP15AA002
25	Compacted	0.9	6	17.7	20.9	24.6	139	DTMC17AA002
35	Compacted	0.9	10	19.7	22.9	26.6	170	DTMC18AA002
50	Compacted	1.0	16	22.6	25.8	29.5	213	DTMC19AA002
70	Compacted	1.1	25	26.2	29.4	33.3	278	DTMC20AA002
95	Compacted	1.1	25	30.0	34.0	38.1	373	DTMC22AA002
120	Stranded	1.2	35	35.0	39.0	43.3	458	DTMP23AA002
3C+E								
16	Stranded	0.8	6	17.0	19.5	23.2	122	FTMP15AA003
25	Compacted	0.9	6	19.3	22.5	26.1	170	FTMC17AA003
35	Compacted	0.9	10	21.6	24.8	28.5	212	FTMC18AA003
50	Compacted	1.0	16	24.9	28.1	32.0	270	FTMC19AA003
70	Compacted	1.1	25	29.4	33.4	37.6	384	FTMC20AA003
95	Compacted	1.1	25	33.0	37.0	41.4	484	FTMC22AA003
120	Stranded	1.2	35	37.9	41.9	46.5	589	FTMP23AA003
150	Stranded	1.4	50	42.6	47.6	52.7	766	FTMP24AA003
185	Stranded	1.6	70	47.7	52.7	58.0	924	FTMP25AA003
240	Compacted	1.7	95	53.7	58.7	64.3	1153	FTMP26AA003
300	Stranded	1.8	120	60.5	65.5	71.7	1367	FTMP27AA003

XLPE/PVC SWA MULTICORE



4 core+earth copper conductors, circular, 0.6/1kV X-90 insulated, PVC bedded, steel wire armoured, PVC sheathed to AS/NZS 5000.1, 90°C.

Nom. cond. area	Main cond. type	Nom. insul. thick.	Earth cond. area	Nom. diam. over bedding	Nom. diam. over armour	Nom. overall diam.	Approx. mass	Product code
mm ²		mm	mm ²	mm	mm	mm	kg/100m	
4C+E								
16	Stranded	0.8	6	18.8	22.0	25.7	160	HTMP15AA004
25	Stranded	0.9	6	21.5	24.7	28.3	204	HTMC17AA004
35	Stranded	0.9	10	24.1	27.3	31.2	257	HTMC18AA004
50	Stranded	1.0	16	27.9	31.9	35.9	350	HTMC19AA004
70	Stranded	1.1	25	32.8	36.8	41.3	468	HTMC20AA004
95	Stranded	1.1	25	37.0	41.0	45.7	600	HTMC22AA004
120	Stranded	1.2	35	43.0	48.0	53.0	783	HTMP23AA004
150	Stranded	1.4	50	47.9	52.9	58.2	945	HTMP24AA004
185	Stranded	1.6	70	54.1	59.1	64.7	1138	HTMP25AA004
240	Stranded	1.7	95	60.2	65.2	71.3	1405	HTMP26AA004
300	Stranded	1.8	120	71.2	77.5	84.2	1838	HTMP27AA004

PVC CONTROL



Multicore circular+earth copper conductors,
0.6/1kV V-90 insulated, PVC sheathed to AS/NZS 5000.1, 90°C.

Number of cores	Nominal overall diameter	Approx. mass	Product code
	mm	kg/100m	
1.5mm² (7/0.50mm)			
5+E	13.1	23	BFAP05AA005
6+E	14.2	28	BFAP05AA006
8+E	16.4	43	BFAP05AA008
10+E	17.1	36	BFAP05AA010
12+E	17.9	41	BFAP05AA012
20+E	21.5	61	BFAP05AA020
30+E	26.0	86	BFAP05AA030
50+E	31.5	132	BFAP05AA050
2.5mm² (7/0.67mm)			
6+E	15.8	39	BFAP07AA006
10+E	19.2	52	BFAP07AA010
12+E	20.2	59	BFAP07AA012
20+E	24.3	88	BFAP07AA020
25+E	26.9	106	BFAP07AA025
30+E	29.5	127	BFAP07AA030
36+E	30.7	144	BFAP07AA036
50+E	36.0	198	BFAP07AA050

PVC SWA CONTROL



Multicore circular+earth copper conductors,
0.6/1kV V-90 insulated, PVC bedded, steel wire armoured,
PVC sheathed to AS/NZS 5000.1, 90°C.

Number of cores	Nominal diameter over bedding	Nominal diameter over armour	Nominal overall diameter	Approx. mass	Product code
	mm	mm	mm	kg/100m	
1.5mm² (7/0.50mm)					
6+E	12.6	14.4	18.0	57	BFCP05AA006
10+E	15.5	18.0	21.7	85	BFCP05AA010
12+E	16.3	18.8	22.5	92	BFCP05AA012
20+E	19.9	23.1	26.7	136	BFCP05AA020
30+E	24.4	27.6	31.2	176	BFCP05AA030
36+E	25.4	28.6	32.4	193	BFCP05AA036
40+E	27.8	31.0	34.9	213	BFCP05AA040
50+E	30.1	34.1	38.3	271	BFCP05AA050
2.5mm² (7/0.67mm)					
6+E	14.2	16.7	20.4	84	BFCP07AA006
10+E	17.6	20.1	23.8	106	BFCP07AA010
20+E	22.7	25.9	29.6	173	BFCP07AA020
25+E	25.3	28.5	32.3	200	BFCP07AA025
30+E	27.9	31.1	35.0	230	BFCP07AA030
40+E	32.3	36.3	40.5	312	BFCP07AA040
50+E	34.4	38.4	42.9	355	BFCP07AA050

XLPE URD POWER



4 core copper and aluminium conductors, 0.6/1kV X-90 insulated, PVC sheathed to AS/NZS 4026, 90°C.

Nominal conductor area	Main conductor type	Nominal insulation thickness	Diameter over insulation	Nominal overall diameter	Approx. mass	Product code
mm ²		mm	mm	mm	kg/100m	
LV Distribution – Aluminium						
185	Solid Sector	1.6	17.5	43.6	283	XDDS25AA004
240	Solid Sector	1.7	19.8	49.0	362	XDDS26AA004
185	Stranded Sector	1.6	18.1	47.5	287	XDDA25AA004
240	Stranded Sector	1.7	20.4	53.2	365	XDDG37AA004
LV Service – Copper						
16	Stranded	1.5	7.9	21.5	77	HEVP15AA004
25	Stranded	1.7	9.3	24.8	116	HEVC17AA004
35	Stranded	1.7	10.3	27.3	151	HEVC18AA004
50	Stranded	1.8	11.7	30.8	201	HEVC19AA004

Note: A range of PVC or XLPE insulated neutral screened cables are available on request.

XLPE AERIAL BUNDLED



2, 3 & 4 core stranded aluminium conductors, aerial bundled cable 0.6/1kV X-90UV insulated, to AS/NZS 3560.1, 90°C.

Nominal conductor area	Nominal insulation thickness	Nominal diameter over insulation	Diameter over laid-up cores	Approx. mass	Product code
mm ²	mm	mm	mm	kg/100m	
2C					
25	1.3	8.6	17.2	19	XDAB17AA002
35	1.3	9.6	19.3	25	XDAB18AA002
50	1.5	11.2	22.3	34	XDAB19AA002
95	1.7	14.9	29.8	64	XDAB22AA002
3C					
25	1.3	8.6	18.5	29	XDAB17AA003
35	1.3	9.6	20.8	37	XDAB18AA003
50	1.5	11.2	24.1	50	XDAB19AA003
70	1.5	12.8	27.5	70	XDAB20AA003
4C					
25	1.3	8.6	20.8	38	XDAB17AA004
35	1.3	9.6	23.2	50	XDAB18AA004
50	1.5	11.2	27.0	67	XDAB19AA004
70	1.5	12.8	30.8	93	XDAB20AA004
95	1.7	14.9	36.0	127	XDAB22AA004
120	1.7	16.3	39.3	156	XDAB23AA004
150	1.7	17.7	42.8	188	XDAB24AA004

Note: A range of XLPE insulated hard drawn copper aerial bundle cables are available on request.



FLEXIBLE POWER

Nexans
Olex

FEATURES AND BENEFITS

Nexans Olex Flexible Conductor

For ease of installation, particularly in applications with tight angles

TPE-90

More flexible and physically tough than PVCs. Plus, added resistance to moisture, chemicals, and oils


LSZH

Low Smoke Zero Halogen for added safety in fire conditions

Copper Tape Screen

Electromagnetic compatibility

Our flexible cable range is available in a number of sheathing options and configurations designed to meet a diverse range of operating environments.



POWERLEX PVC OD CORDS



2, 3, 4 C+E flexible copper conductors, 250/440V V-90 insulated and sheathed ordinary duty flexible cord to AS/NZS 3191 and AS/NZS 60227.

Nominal conductor area	Maximum diameter of wires	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	kg/100m	
2C				
0.75	0.21	6.2	5.6	CAHR02AA002
1.0	0.21	6.6	6.4	CAHR03AA002
1.5	0.21	7.5	8.7	CAHR04AA002
2.5	0.21	9.2	13	CAHR05AA002
2C+E				
0.75	0.21	6.6	6.5	EAHR02AA003
1.0	0.21	6.9	7.6	EAHR03AA003
1.5	0.21	8.1	11	EAHR04AA003
2.5	0.21	9.9	17	EAHR05AA003
4	0.31	11.2	23	EAHR06AA003
3C+E				
0.75	0.21	7.2	7.9	GAHR02AA004
1.0	0.21	7.8	9.5	GAHR03AA004
1.5	0.21	9.1	13	GAHR04AA004
2.5	0.21	10.9	20	GAHR05AA004
4	0.31	12.3	28	GAHR06AA004
4C+E				
1.0	0.21	8.5	10	APAR03AA005
1.5	0.21	10.1	14	APAR04AA005
2.5	0.21	12.1	22	APAR05AA005
4.0	0.31	13.9	31	APAR06AA005

POWERLEX PVC HD CORDS



1, 2C+E and 3C+E flexible copper conductors, 0.6/1kV V-90 insulated and PVC sheathed heavy duty flexible cord to AS/NZS 3191

Nominal conductor area	Maximum diameter of wires	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	kg/100m	
Single Core 0.6/1kV – V-90 Insulated, Flexible Cord				
0.75	0.21	2.7	1.3	BAAR02AA001
1.0	0.21	2.9	1.6	BAAR03AA001
1.5	0.21	3.2	2.1	BAAR04AA001
2.5	0.21	3.8	3.3	BAAR05AA001
2C+E				
1.0	0.21	9.0	11	EBGR03AA003
1.5	0.21	9.9	14	EBGR04AA003
2.5	0.21	11.7	21	EBGR05AA003
3C+E				
1.5	0.21	10.9	18	GBGR04AA004
2.5	0.21	12.9	25	GBGR05AA004

Note to OD and HD cords:

- 2 Core: Brown, light blue
 - 3 Core: Brown, light blue, green/yellow
 - 4 Core: Brown, light blue, white, green/yellow
 - 5 Core: Brown, light blue, orange, white, green/yellow
- Light blue is normally used as a neutral (where applicable)
V-90HT is available on request subject to minimum production runs

VERSOLEX HD



Single Core

Single core flexible copper conductors, 0,6/1kV X-90 insulated and TPE-90 sheathed to AS/NZS 5000.1 (power) and AS/NZS 1995 (Welding), 90°C.

Nominal conductor area	Maximum diameter of wires	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	kg/100m	
10	0.21	8.5	14	BDSX01AA001
16	0.21	9.8	20	BDSX02AA001
25	0.21	11.3	28	BDSX03AA001
35	0.21	12.5	37	BDSX04AA001
50	0.31	14.3	51	BDSX05AA001
70	0.31	16.2	71	BDSX06AA001
95	0.31	18.1	92	BDSX07AA001
120	0.51	20.6	108	BDSE87AA001
150	0.51	22.5	144	BDSE88AA001
185	0.51	24.6	175	BDSE89AA001
240	0.51	27.7	228	BDSE90AA001
300	0.51	31.0	282	BDSE91AA001
400	0.51	35.4	369	BDSE92AA001

Multicore

Multicore flexible copper conductors, 0,6/1kV X-90 insulated and TPE-90 sheathed to AS/NZS 3191 and AS/NZS 5000.1 where applicable, 90°C.



Nominal conductor area	Maximum diameter of wires	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	kg/100m	
3C (2C+E)				
1.5	0.21	9.5	12	EFGR04AA003
2.5	0.21	10.9	17	EFGR05AA003
4C (3C+E or 3C+3E)				
2.5	0.21	12.0	20	GFGR05AA004
4.0	0.31	13.6	28	GFGR06AA004

Note: Also available in larger sizes and low smoke zero halogen sheath.
Also see Envirolex Flexible Cables refer to page 33.



VAROLEX VSD/EMC



3C + 3E copper conductor, 0,6/1kV X-90 insulated, PVC bedded, copper tape screened, PVC sheathed to AS/NZS 5000.1, 90°C.

Nominal conductor area	Nominal insulation thickness	Combined earth size area	Nominal dia. over screen	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm ²	mm	mm	kg/100m	
2.5	0.7	2.5*	10.9	14.6	32	FTDP07AA003
4	0.7	4.5	13.0	16.6	44	FTDP09AA003
6	0.7	4.5	13.8	17.5	51	FTDP11AA003
10	0.7	4.5	14.8	18.5	62	FTDP13AA003
16	0.8	7.5	17.0	20.6	86	FTDP15AA003
25	0.9	12	19.2	22.8	121	FTDC17AA003
35	0.9	18	21.9	25.6	160	FTDC18AA003
50	1.0	30	25.1	28.8	211	FTDC19AA003
70	1.1	30	28.1	32.0	277	FTDC20AA003
95	1.1	48	33.9	38.0	390	FTDC22AA003
120	1.2	48	38.9	43.2	467	FTDP23AA003
150	1.4	75	42.6	47.3	585	FTDP24AA003
185	1.6	75	47.5	52.0	711	FTDP25AA003
240	1.7	105	53.6	58.9	918	FTDP26AA003
300	1.8	150	59.6	65.2	1154	FTDP27AA003


Note: *Split earth not feasible, therefore a single earth conductor is utilised.
 This range does not utilise flexible conductors.





COMPLETE FIRE PERFORMANCE RANGE

Alsecure is the range of fire performance cables to use when safety and security are critical to your project. Our Alsecure® range incorporates flexible conductors for easy handling and installation compared with standard copper conductors.




ALSECURE ENVIROLEX

No toxic fumes released when exposed to fire providing additional evacuation time



ALSECURE PLUS

All the benefits of Alsecure® Envirolex® plus circuit integrity to AS/NZS 3013 with WS52W rating to maintain power to essential services



ALSECURE PREMIUM

All the benefits of Alsecure® Plus but utilising Infit™ insulation technology for added ease of handling and time savings potential

ALSECURE ENVIROLEX



Halogen
free



Low
smoke



Operating
temp 110°C




Flame
retardant



High
flexibility

Nexans
Polex

ALSECURE ENVIROLEX SINGLE CORE



Single core flexible copper conductor, 0.6/1kV X-HF-110 insulated, HFS-110-TP sheathed to AS/NZS 5000.1 and AS/NZS 1995, Low smoke zero halogen insulation and sheath, 110° C continuous.

Nominal conductor area	Maximum diameter of wires	Nominal overall diameter	Approx. mass	Product code
mm ²	mm	mm	kg/100m	
10	0.21	8.6	16	BZXH01AA001
16	0.21	9.8	23	BZXH02AA001
25	0.21	11.3	31	BZXH03AA001
35	0.21	12.5	40	BZXH04AA001
50	0.31	14.3	56	BZXH05AA001
70	0.31	16.2	75	BZXH06AA001
95	0.31	18.1	98	BZXH07AA001
120	0.51	20.4	113	BZHE87AA001
150	0.51	22.5	151	BZHE88AA001
185	0.51	24.8	182	BZHE89AA001
240	0.51	27.9	236	BZHE90AA001
300	0.51	30.8	295	BZHE91AA001
400	0.51	34.7	382	BZHE92AA001
500	0.51	40.0	483	BZHE93AA001
630	0.51	44.6	635	BZHE94AA001

Note: Also available in green/yellow earth between 10mm²-120mm².

ALSECURE PLUS



Fire resistant



Low smoke



Corrosion resistant



Halogen free



Operating temp 110°C



High flexibility



Flame retardant



Chemical resistance

Nexans
Olex

FEATURES AND BENEFITS

Flexible Copper Conductor

For ease of handling and installation

Low Smoke Zero Halogen Materials

Non-toxic emissions in the event of a fire and contributes to the green star rating of your project

MICA Tape

Provides the cable with circuit integrity to ensure operation of key safety systems in the event of fire

110 C Rated Materials

To maximise your utilisation of copper

APPLICATIONS

- Fire resistant power circuit
- Consumer mains and subs mains
- Lift sub mains
- Power cable to fire pumps

Nexans Olex is proud to offer the widest range of fire performance cables and expertise made in Australia. Alsecure® Plus achieves fire rating in accordance with WS52W AS/NZS 3013 plus the added benefit of flexible conductors to save you time on your next installation.



ALSECURE PLUS SINGLE CORE



Single core flexible copper conductor, Mica taped, 0.6/1kV X-HF-110 insulated, HFS-110-TP sheathed to AS/NZS 5000.1 and AS/NZS 3013 WS52W, 110°C.

Nom. Cond. Area	Nominal insulation thickness	Nom. sheath thickness	Nominal overall diameter	Approx. mass	Min. bending radius during install	Max pulling tension	Product code
mm ²	mm	mm	mm	kg/100m	mm	kN	
10	0.7	1.4	8.9	18	40	0.22	PFLX01AA001
16	0.8	1.4	10.1	24	61	0.34	PFLX02AA001
25	0.9	1.4	11.6	34	70	0.53	PFLX03AA001
35	0.9	1.4	13.5	44	81	0.72	PFLX04AA001
50	1.0	1.4	15.3	63	92	1.08	PFLX05AA001
70	1.1	1.4	17.2	82	103	1.5	PFLX06AA001
95	1.1	1.6	19.3	110	116	2.0	PFLX07AA001
120	1.2	1.6	21.6	134	130	2.5	PFLE87AA001
150	1.4	1.6	23.5	162	141	3.1	PFLE88AA001
185	1.6	1.8	26.2	196	236	3.8	PFLE89AA001
240	1.7	1.8	29.1	254	262	5.1	PFLE90AA001
300	1.8	1.8	31.8	309	286	6.2	PFLE91AA001
400	2.0	2.0	35.9	396	323	8.1	PFLE92AA001
500	2.2	2.2	40.8	510	367	10.6	PFLE93AA001
630	2.4	2.2	45.0	646	405	13.7	PFLE94AA001

ALSECURE PLUS MULTICORE



Multicore flexible copper conductors, Mica taped, 0.6/1kV X-HF-110 insulated, HFS-110-TP sheathed to AS/NZS 5000.1 and AS/NZS 3013 WS52W, 110°C.

Number of cores	Nominal conductor area	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
	mm ²	mm	mm	mm	kg/100m	
2+E	2.5	0.7	1.8	14.2	27	PDGP07AA002*
4+E	10	0.7	1.8	21.1	80	PDGX01AA004
4+E	16	0.8	1.8	23.9	110	PDGX02AA004
4+E	25	1.0	1.8	27.7	175	PDGX03AA004
4+E	35	1.0	1.8	31.5	230	PDGX04AA004
4+E	50	1.0	2.0	35.9	312	PDGX05AA004

Note: *PDGP07AA002 utilises a stranded copper conductor.

ALSECURE PREMIUM



Fire
resistant



Low
smoke



Corrosion
resistant



Halogen
free



Operating
temp 90°C



High
flexibility



Flame
retardant



Chemical
resistance

Nexans
Olex

FEATURES AND BENEFITS

Ceramifiable Insulation

Provides circuit integrity characteristics while being safer and faster to install compared with traditional fire rated cable technologies

Flexible Copper Conductor

For ease of handling and installation

Non-flexible Copper Conductor

For reduced 'snaking'

Low Smoke Zero Halogen Materials

Non-toxic emissions in the event of a fire and contributes to the green star rating of your project

APPLICATIONS

- Fire resistant power circuit
- Consumer mains and subs mains
- Lift sub mains
- Power cable to fire pumps

Alsecure® Premium utilises a unique polymer technology which transforms from a flexible insulation into a tough ceramic barrier when exposed to fire. This allows for a fire rating to WS52W and AS/NZS 3013 without the use of Mica tape providing valuable time savings during your next installation.

ALSECURE PREMIUM SINGLE



Single core, 0.6/1kV, Ceramifiable HFI-90-TP insulated, HFS-90-TP sheathed to AS/NZS 5000.1 and AS 3013 WS52W, 90°C.

Nominal conductor area	Nominal insulation thickness	Nom. sheath thickness	Nominal overall diameter	Approx. mass	Min. bending radius during installation	Max. pulling tension	Product code
mm ²	mm	mm	mm	kg/100m	mm	kN	
10	1.0	1.4	9.6	18	43	0.22	PXX01AA001
16	1.0	1.4	10.6	24	63	0.34	PXX02AA001
25	1.2	1.4	12.3	32	73	0.49	PXX03AA001
35	1.2	1.4	13.5	42	81	0.69	PXX04AA001
50	1.4	1.4	15.5	58	93	1.00	PXX05AA001
70	1.4	1.6	17.6	80	105	1.43	PXX06AA001
95	1.6	1.6	19.7	103	118	1.89	PXX07AA001
120	1.6	1.6	21.8	119	131	2.19	PXKE87AA001
150	1.8	1.6	23.7	157	142	3.01	PXKE88AA001
185	2.0	1.8	26.4	192	238	3.67	PXKE89AA001
240	2.2	1.8	29.5	248	265	4.85	PXKE90AA001
300	2.4	2.0	32.8	308	295	6.06	PXKE91AA001
400	2.6	2.0	36.5	400	328	7.99	PXKE92AA001
500	2.8	2.2	42.0	503	378	10.1	PXKE93AA001
630	2.8	2.2	45.8	651	412	13.5	PXKE94AA001

ALSECURE PREMIUM MULTICORE



Multicore copper conductor, 0.6/1kV, Ceramifiable HFI-90-TP insulated, HFS-90-TP sheathed to AS/NZS 5000.1 and AS 3013 WS52W, 90°C.

Number of cores	Nominal conductor area	Nominal insulation thickness	Nominal sheath thickness	Nominal overall diameter	Approx. mass	Product code
	mm ²	mm	mm	mm	kg/100m	
SMALL MULTICORES						
3+E	1.5	1.0	1.8	11.2	21	PDKP05AA003
4	1.5	1.0	1.8	12.4	22	PEKP05AA004
4+E	1.5	1.0	1.8	13.1	25	PDKP05AA004
2	2.5	1.0	1.8	12.0	19	PEKP07AA002
2+E	2.5	1.0	1.8	12.3	23	PDKP07AA002
3	2.5	1.0	1.8	12.6	23	PEKP07AA003
3+E	2.5	1.0	1.8	13.3	27	PDKP07AA003
4+E	2.5	1.0	1.8	14.4	32	PDKP07AA004
2	4	1.0	1.8	13.0	23	PEKP09AA002
2+E	4	1.0	1.8	13.2	27	PDKP09AA002
3	4	1.0	1.8	13.7	29	PEKP09AA003
3+E	4	1.0	1.8	14.3	33	PDKP09AA003
4+E	4	1.0	1.8	15.6	40	PDKP09AA004
LARGE MULTICORES						
2+E	6	1.0	1.8	14.2	32	PDTP11AA002
3+E	6	1.0	1.8	15.5	41	PDTP11AA003
4+E	6	1.0	1.8	16.9	49	PDTP11AA004
2+E	10	1.0	1.8	15.9	43	PDTP13AA002
3+E	10	1.0	1.8	17.3	56	PDTP13AA003
4+E	10	1.0	1.8	19.0	69	PDTP13AA004
3+E	16	1.0	1.8	19.4	78	PDTP15AA003
4+E	16	1.0	1.8	21.4	97	PDTP15AA004
3+E	25	1.2	1.8	22.0	109	PDTC17AA003
4+E	25	1.2	1.8	24.4	138	PDTC17AA004
3+E	35	1.2	1.8	24.4	141	PDTC18AA003
4+E	35	1.2	1.8	27.1	180	PDTC18AA004
4+E	50	1.4	1.9	31.5	243	PDTC19AA004

Note: Alsecure Premium multicore utilises non-flexible copper conductors





DATA AND COMMS

Nexans
Olex

FEATURES AND BENEFITS

Aluminium Tape Screen

Provides uninterrupted
clean signals

LSOH

For added safety in
the event of a fire

Nylon

For rodent and
termite resistance

Rip Cord

Easy stripping for safe
and fast installation


Steel Wire Armour

For added mechanical
strength

The Nexans Olex range of data and communications cables are designed to meet the needs of customers today and in the future. Our comprehensive Datolex range has been specifically designed with the installer in mind while our Gardolex® range of extra low voltage cables make garden lighting simple, reliable and economical.



SECURITY



Used in control circuits associated with security systems including detection, monitoring and access control. Designed for use in ELV systems at maximum 50V AC or 120V DC.

Unscreened Security

Stranded bare copper conductor, PVC insulated, cores laid up, PVC sheathed

Number of conductors	Nominal conductor area	Nominal overall diameter	Approx. mass	Max. DC resistance @20°C	Product code
	mm ²	mm	kg/100m	ohm/km	
7/0.20 mm Conductor					
4	0.22	3.6	1.4	100	JSC.2xx4C*
6	0.22	4.9	3.1	100	JSC.2xx6C*
14/0.20mm Conductor					
4	0.44	4.7	3.2	50	JSC.5xx4C*
6	0.44	6.1	4.7	50	JSC.5xx6C*

xx Sheath colour: GY Grey; WT White. *Pack size: 1 – 100m spool; B – 300m box; C – 250m spool (JSC.5xx6C only); B2 – 200m box (JSC.5xx6C only). Insulation colours: 4C – Red, Black, White, Blue; 6C – Red, Black, White, Blue, Green, Yellow.


Screened Security

Stranded bare copper conductor, PVC insulated, twisted pair, aluminium foil overall tape screened and stranded tinned copper drain wire, PVC sheathed.

Number of conductors	Nominal conductor area	Nominal overall diameter	Approx. mass	Max. DC resistance @20°C	Product code
	mm ²	mm	kg/100m	ohm/km	
7/0.25 mm Conductor					
2 Pair (individually screened)	0.35	4.2	2.8	55	JD2PIS**

Note: *Pack size: 1 – 100m spool; B – 300m box (JD2PIS only); A3 – 300m spool (JD2PISFA3 only). Grey PVC Sheath, 7/0.25mm T/C drain wire. Also available in jelly filled version JD2PISFP3). Insulation colours: Black and Red, Green and White. xx sheath colour.

AUDIOLEX



Used in audio systems for low and high power speaker connections. Also used in security applications.

Audioplex Oxygen Free Copper Audio

Stranded bare copper conductors, PVC insulated and overall violet PVC sheath (twin sheath only).

Number of cores	Nominal conductor area	Stranding	Approx. mass	Nominal insulation thickness	Nominal overall diameter	Nominal conductor res. @20°C	Pack size	Product code
	mm ²	No./mm	kg/100m	mm	mm	ohm/km		
7/0.25 mm Conductor								
2	1.2	70/0.15	5.8	2.2	6.5	17.2	B	JTS1.2VT2CA3
2	2.5	140/0.15	10.0	3.3	8.5	7.8	B	JTS2.5VT2CA3
4	1.2	70/0.15	8.6	2.2	6.9	17.2	B	JTS1.2VT4CA3

FIGURE 8



Two stranded bare copper conductors, PVC insulated (parallel webbed).

Nominal conductor size	Nominal overall size	Stranding	Insulation thickness	Approx. mass	Maximum direct current resistance @ 20°C	Product code
mm ²	mm	no./mm	mm	kg/100m	ohm/km	
Standard						
0.5	2.0 X 4.0	14/0.20	0.5	2.0	50	JSF.5xx*
0.75	3.0 X 6.0	24/0.20	0.8	3.0	29.2	JSF.75xx*
Oxygen Free Copper						
2	7.0 X 3.4	64/0.20	0.8	5.2	10.9	JSF2.0CL*
2.6	9.0 X 4.5	84/0.20	1.0	8.1	7.4	JSF2.6CL1

Note: *Pack size xx sheath colour.



LAN

Used in high speed data/comms networks.
Manufactured for compatibility with the RJ type connector.



LAN

Bare copper conductor, polyolefin insulated, twisted pairs, PVC sheathed.
Polyethelene sheathed for LAN underground.

No. of pairs	Nominal conductor area	Nominal overall diameter	Stranding	Approx. mass	Maximum conductor resistance @ 20°C	Nominal impedance	Mutual capacitance	Product Code
	mm ²	mm	no./mm	kg/100m	ohm/km	ohms	pF/m	
LAN								
4	0.22	5.3	1/0.50	3.2	93.8	100	51	JCAT5E
4	0.22	5.3	1/0.50	3.2	93.8	100	51	JCAT56
LAN UNDERGROUND								
4	0.22	5.7	1/0.50	3.2	93.8	100	51	JCAT5EFP3
4	0.22	6.3	1/0.54	4.2	93.8	100	51	JCAT6FPA3

COAXIAL

Used in baseband and broadband video systems,
digital data link applications and digital highways.



Coaxial 75 Ohm

Bare annealed copper conductor, PE insulated, bare copper wire braid,
black PVC sheathed.

Nominal overall diameter	Stranding	Approx. mass	Shielding	Dielectric	Maximum conductor resistance @ 20°C	Nominal capacitance	Nominal velocity propagation	Product code
mm	no./mm	kg/100m		85% B/C Solid PE	ohm/km	pF/m	%	
6.1	1/0.60	5.2	Braid		62.2	67	66	JBCRG59BUCCTV

TELEPHONE INTERNAL

Used in networks within telephone exchanges, commercial
switchboards and interconnecting wiring systems for some data applications.



Internal, PVC Insulated, PVC Sheath

Solid bare copper conductor, PE insulated twisted pair, PVC sheathed, manufactured to
Category 3 standard.

Pairs	Nominal overall diameter	Wire size	Approx. mass	Sheath colour	Product code
	mm	mm	kg/100m		
2	4.1	0.5	1.3	Cream	TINT002

Note: External telephone cable designs are also available on request.



OPTICAL FIBRE



Designed for duct installation or direct burial, where water or termite resistance are required.

Nylon Underground

Optical Fibres contained in jelly filled mono/loose tube, aramid yarn reinforced, PE sheathed and nylon oversheath.

Description	Nominal overall diameter	Approx. mass	Maximum pulling tension	Minimum bending radius	Product code
	mm	kg/100m	kN	During installation Installed	
Single Mode (OS1)					
10/125 μ m SM 6 Fibre	8.5	6.0	1.5	170	85 FIB06SMJN
10/125 μ m SM 12 Fibre	8.5	6.0	1.5	170	85 FIB12SMJN
10/125 μ m SM 24 Fibre	11.0	9.5	2.3	220	110 FIB24SMJN
Multi Mode (OM1)					
62.5/125 μ m MM 6 Fibre	8.5	6.0	1.5	170	85 FIB06MMJN
62.5/125 μ m MM 8 Fibre	8.5	6.0	1.5	170	85 FIB08MMJN
62.5/125 μ m MM 12 Fibre	8.5	6.0	1.5	170	85 FIB12MMJN
62.5/125 μ m MM 24 Fibre	11.0	9.5	2.3	220	110 FIB24MMJN
Multi Mode (OM3)					
50/125 μ m MM 12 Fibre	8.5	6.0	1.5	170	85 FIB12OM3JN

Options

Fibre counts up to 324 fibre are available upon request for loose tube cables

Corrugated Steel Tape (CST) Armouring

Composite (combination of single and multi mode)

ADSS (All Dielectric Self Supporting)

Sacrificial Sheath

Low Smoke Zero Halogen (LSZH) outer sheath

Rodent Resistance

Note: Minimum order quantity applies to these options.

The OS1 fibre is specified to ITU-T G652.D (low water peak).

GARDOLEX PVC GARDEN LIGHTING



Used for outdoor AC/DC lighting applications, Gardolex is a robust PVC insulated power cable suitable for projects of all sizes.

Figure 8, plain annealed copper, PVC insulated.

Stranded Bare Copper Conductors, PVC insulated (parallel web), water resistant. Designed for ELV systems at maximum 50 V AC or 120V DC.

No. of cores	Nominal conductor area	Stranding	Nominal overall size	Approx. mass	Max direct current resistance @ 20°C	Voltage drop single phase @ 45°C	Current rating	Product code
	mm ²	no./mm	mm	kg/100m	ohm.km	mV/A.m	A	
2	1.3	26/0.25	4.0 X 8.6	7	15.3	33.6	18	JSF1.3GLBK
2	2.5	76/0.20	4.0 X 9.35	10	8.00	17.6	25	JSF2.5GLBK
2	4	56/0.30	5.0 X 10.4	12	4.95	10.9	33	JSF4GLBK
2	6	81/0.30	6.0 X 12.5	16	3.30	7.25	42	JSF6GLBK
2	10	348/0.20	6.7 X 13.9	25	1.91	4.20	57	JSF10GLBK

DETONATING



Used as shot firing wire, connected to detonators in mining, geological and exploration industries. 2 Core (1/0.70mm) tinned copper conductor, PVC insulated in twisted pair or figure 8 configuration.

Configuration	Nominal conductor area	Nominal overall size	Approx. mass	Maximum conductor resistance @ 20°C	Product code
	mm ²	mm	kg/100m	ohm/km	
Twister Pair	0.38	3.2 X 1.6	0.8	47.6	JDW2CRDWT
Figure 8	0.38	3.2 X 1.6	0.8	47.6	JDW1PRDWT



FIRE ALARM

Used in evacuation systems, smoke detectors and alarms.




Unscreened

Stranded bare copper conductor, PVC insulated, flat parallel or twisted pair, PVC sheath.

Nominal conductor area	Stranding	Nominal overall diameter/size	Approx. mass	Max. cond. resistance @20°C	Voltage rating	Product code
mm ²	No./mm	mm	kg/100m	ohm/km		
1.5	7/0.50	7.0	5.0	13.6	ELV	JRS1502
0.75	24/0.20	3.4 X 5.5	4.0	26.0	250/250	CBLR02AA002
1.5	7/0.50	4.6 X 7.3	10.0	13.6	450/750	CACP05AA002

DATA

Designed for the interconnection of data terminal and communications equipment. This range of cables can be used to connect equipment operating on the EIA standards RS232 and RS485.

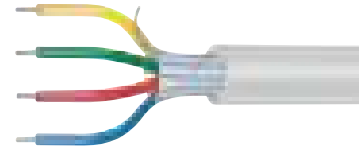

RS232

Stranded (7/0.2mm) finned copper conductors, PVC cores laid up, aluminium foil overall tape screened with a stranded drain wire, PVC sheath.

Cores	Nominal conductor area	Nominal overall diameter	Approx. mass	Max. cond. resistance @20°C	Nominal pair	Product code
	mm ²	mm	kg/100m	ohm/km	pF/m	
6 Core	0.22	5.5	4.2	93.3	90	JD6CSAA

RS485

Stranded (7/0.2mm) finned copper conductors, PE insulated, twisted pair, aluminium foil overall tape screened and tinned copper braid shield (90% coverage), PVC sheathed.

Pairs	Nominal conductor area	Nominal overall diameter	Approx. mass	Max. cond. resistance @20°C	Nominal pair	Product code
	mm ²	mm	kg/100m	ohm/km	pF/m	
1 Pair	0.22	5.9	6.0	83.5	50	JD1PS485A3
2 Pair	0.22	8.6	8.0	83.5	50	JD2PS485A3

COMPOSITE

Composite Coaxial and Control Core

RG59 coaxial with braid (95% coverage) with two 24/0.20mm power cores (250V/250V), PVC insulated, positioned either side of coaxial, black PVC sheathed.



Nominal overall size	Approx. mass	Nominal insulation thickness	DC resistance @ 20°C	Voltage drop single phase @ 45°C	Product code
mm	kg/100m	mm	ohm/km	mV/A.m	
13 x 7.8	12	0.8	26	57.1	JCOMP1

Composite LAN (2 Pair and Earth)

2 pair 7/0.25mm tinned copper, individually shielded with 7/0.67 bare copper insulated earth, PVC sheathed.



Nominal overall size	Approx. mass	Product code
mm	kg/100m	
9.6 X 5.8	8.4	J8723+2.5BW250

TRAFFIC

Complete supply of cables for traffic signal installation management.

Traffic Signalling Multicore Power Cable

Stranded (7/0.50mm) bare copper conductor, 0.6/1kV PVC insulated, orange PVC sheathed to AS/NZS 2276.1.



Total	Power	Control	Nominal overall diameter	Approx. mass	Product code
			mm	kg/100m	
13	3 X 2.5	10 X 1.5	17.6	43	LXMP07AA013
19	3 X 2.5	16 X 1.5	19.9	59	LXMP07AA019
29	3 X 2.5	26 X 1.5	23.7	81	LXMP07AA029
29	3 X 4.0	26 X 1.5	26.0	92	LXMP09AA029
51	3 X 4.0	48 X 1.5	32.3	143	LXMP09AA051

Loop Cable for Vehicle Detectors

Single Core stranded (7/0.50mm) tinned copper conductor, Polypropylene insulated, 250V to AS/NZS 2276.3.



Nominal overall diameter	Approx. mass	Product code
mm	kg/100m	
3.6	2.0	ZZLM07AA332

Feeder Cable for Vehicle Detectors

Stranded (7/0.50mm) bare copper conductor, PE insulated twisted balanced – twin, jelly filled, metallic screened, PVC sheathed, for ELV to AS/NZS 2276.2.



No. of pairs	Nom. diam.	Approx. mass	Nom. insul. thick.	Char. imped.	Mutual Cap. unbal.	Water pene.	Pack sizes	Product code
	mm	kg/100m	mm	ohm	nF/km	ohm/km	500m drum 1000m drum	
1	9.3	8.0	0.5	80-100	65-80	<2%	<3% 3 3	JTCD28*002


INSTROLEX INSTRUMENTATION



Overall Screened Pairs

Designed to transmit clean signals within industrial environments where there is a high level of electromagnetic interference. Uses include process control, oil and gas and heavy industry.

Pairs	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)					
1	5.2	31	0.07	3.5	IEB183AA001
2	7.8	47	0.14	6.3	IEC183AA002
4	8.4	50	0.28	9.4	IEC183AA004
6	10.0	60	0.42	13	IEC183AA006
8	11.2	67	0.56	17	IEC183AA008
10	12.5	75	0.70	21	IEC183AA010
12	13.4	80	0.84	24	IEC183AA012
16	15.1	91	1.12	31	IEC183AA016
20	16.8	101	1.40	38	IEC183AA020
24	18.1	109	1.68	45	IEC183AA024
36	22.0	132	2.52	66	IEC183AA036
50	25.6	153	3.50	90	IEC183AA050
Conductor 1.5mm² (7/0.50mm)					
1	6.6	40	0.21	6	IEB184AA001
2	9.9	60	0.42	11	IEC184AA002
4	10.9	65	0.84	18	IEC184AA004
6	13.0	78	1.26	26	IEC184AA006
8	14.6	88	1.68	33	IEC184AA008
10	16.3	98	2.10	41	IEC184AA010
12	17.5	105	2.52	48	IEC184AA012
16	20.0	120	3.36	63	IEC184AA016
20	22.3	134	4.20	79	IEC184AA020
24	24.1	145	5.04	93	IEC184AA024
36	29.2	175	7.56	137	IEC184AA036
50	34.2	205	10.50	188	IEC184AA050



Individually and Overall Screened Pairs


Plain annealed copper conductor, V-90 PVC insulated, twisted pairs, individually and overall screened with aluminium polyester tape plus tinned copper drain wire, rip cord, V-90 PVC sheathed, tested to confirm limited flame propagation.

Pairs	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)					
2	8.1	49	0.14	7.3	IED183AA002
4	10.4	62	0.28	12	IED183AA003
6	12.2	73	0.42	17	IED183AA006
8	13.9	84	0.56	22	IED183AA008
10	14.6	88	0.70	26	IED183AA010
12	16.0	96	0.84	31	IED183AA012
16	18.0	108	1.12	39	IED183AA016
20	20.1	120	1.40	48	IED183AA020
24	21.9	131	1.68	57	IED183AA024
36	26.3	158	2.52	83	IED183AA036
50	30.6	184	3.50	112	IED183AA050
Conductor 1.5mm² (7/0.50mm)					
2	10.3	62	0.42	13	IED184AA002
4	13.4	81	0.84	22	IED184AA004
6	16.1	97	1.26	32	IED184AA006
8	18.2	109	1.68	40	IED184AA008
10	19.3	116	2.10	49	IED184AA010
12	20.9	125	2.52	57	IED184AA012
16	23.9	143	3.36	75	IED184AA016
20	26.5	159	4.20	92	IED184AA020
24	29.0	174	5.04	110	IED184AA024
36	35.1	210	7.56	162	IED184AA036
50	40.8	245	10.50	220	IED183AA050

INSTROLEX INSTRUMENTATION SWA

Overall Screened Pairs with SWA

Plain annealed copper conductor, V-90 PVC insulated, twisted pairs, overall screened with aluminium polyester tape plus tinned copper drain wire, rip cord, PVC bedding, steel wire armour, V-90 PVC sheathed, tested to confirm limited flame propagation.



Pairs	Nominal diameter over bedding	Nominal diameter over armour	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)							
2	7.4	9.2	11.4	137	2.3	25	IEG183AA002
4	8	9.8	12	144	2.4	28	IEG183AA004
6	9.4	11.2	13.6	164	2.8	36	IEG183AA006
8	10.6	12.4	14.8	178	3.1	42	IEG183AA008
10	11.7	13.5	16.1	193	3.4	48	IEG183AA010
12	12.6	14.4	17	204	3.6	54	IEG183AA012
16	14.3	16.1	18.9	227	4.2	65	IEG183AA016
20	15.8	18.3	21.1	253	6.4	86	IEG183AA020
24	17.1	19.6	22.7	272	6.9	97	IEG183AA024
36	20.5	23	26.3	316	8.2	127	IEG183AA036
50	23.9	26.4	29.9	259	9.5	160	IEG183AA050
Conductor 1.5mm² (7/0.50mm)							
1	6.2	8	10.2	123	2	22	IEF184AA001
2	9.4	11.2	13.6	163	2.8	34	IEG184AA002
4	10.3	12.1	14.5	174	3.1	42	IEG184AA004
6	12.2	14	16.6	199	3.6	55	IEG184AA006
8	13.8	15.6	18.2	219	4	65	IEG184AA008
10	15.2	17.7	20.6	247	6.2	87	IEG184AA010
12	16.5	19	22.1	265	6.7	99	IEG184AA012
16	18.8	21.3	24.4	292	7.5	119	IEG184AA016
20	20.8	23.3	26.6	319	9.3	140	IEG184AA020
24	22.6	25.1	28.6	344	9	161	IEG184AA024
36	27.7	30.2	34.4	413	11	223	IEG184AA036
50	32.3	35.5	39.7	477	16.4	307	IEG184AA050

Individually and Overall Screened Pairs with SWA

Plain annealed copper conductor, V-90 PVC insulated, twisted pairs, individually and overall screened with aluminium polyester tape plus tinned copper drain wire, rip cord, PVC bedding, steel wire armour, V-90 PVC sheathed, tested to confirm limited flame propagation.



Pairs	Nominal diameter over bedding	Nominal diameter over armour	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)							
2	7.7	9.5	11.7	141	2.4	26	IEH183AA002
4	9.8	11.6	14	168	2.9	35	IEH183AA004
6	11.6	13.4	16	192	3.4	45	IEH183AA006
8	13.1	14.9	17.5	210	3.8	52	IEH183AA008
10	13.8	15.6	18.2	219	4	58	IEH183AA010
12	15	16.8	19.6	235	4.3	66	IEH183AA012
16	17	19.5	22.6	271	6.9	91	IEH183AA016
20	18.8	21.3	24.4	293	7.5	104	IEH183AA020
24	20.4	22.9	26.2	315	8.2	118	IEH183AA024
36	24.6	27.1	30.6	368	9.8	155	IEH183AA036
50	29.1	31.6	35.8	430	11.5	202	IEH183AA050
Conductor 1.5mm² (7/0.50mm)							
2	9.7	11.5	13.9	167	2.9	36	IEH184AA002
4	12.6	14.4	17.1	205	3.6	51	IEH184AA004
6	15.1	17.6	20.4	245	6.2	78	IEH184AA006
8	17.1	19.6	22.7	272	6.9	92	IEH184AA008
10	18.1	20.6	23.7	284	7.4	103	IEH184AA010
12	19.6	22.1	25.4	305	7.9	116	IEH184AA012
16	22.4	24.9	28.4	341	9	143	IEH184AA016
24	27.5	30	33.9	407	11	194	IEH184AA024

INSTROLEX TRIPLES

Plain annealed copper conductor, V-90RP PVC insulated, twisted triples, individual and/or overall screened with aluminium polyester tape plus tinned copper drain wire, rip cord, V-90RP PVC sheathed.



Overall Screened


Triples	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)					
4	10	60	0.42	13	IGC183AA004
6	11.7	70	0.63	19	IGC183AA006
12	16.1	96	1.26	35	IGC183AA012
16	18.1	109	1.68	45	IGC183AA016
36	26.4	159	3.78	96	IGC183AA036
Conductor 1.5mm² (7/0.50mm)					
1	6.9	42	0.32	7.8	IGB184AA001
4	13	78	1.26	26	IGC183AA004
6	15.6	93	1.89	38	IGC184AA006
12	21.1	126	3.78	71	IGC184AA012
16	24.1	145	5.04	93	IGC184AA016
36	35.4	212	11.3	202	IGC184AA036

Individual and Overall Screened

Triples	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)					
4	11	66	0.42	16	IGD183AA004
6	13.4	79	0.63	22	IGD183AA006
12	17	102	1.26	40	IGD183AA012
16	19.4	116	1.68	52	IGD183AA016
36	28.2	169	3.78	111	IGD183AA036
Conductor 1.5mm² (7/0.50mm)					
4	14.2	85	1.26	29	IGD184AA004
6	17.1	102	1.89	42	IGD184AA006
12	22.4	135	3.78	78	IGD184AA012
16	25.6	154	5.04	103	IGD184AA016
36	37.6	225	11.3	223	IGD184AA036

INSTROLEX TRIPLES SWA

Plain annealed copper conductor, V-90RP PVC insulated, twisted triples, individual and/or overall screened with aluminium polyester tape plus tinned copper drain wire, rip cord, V-90RP PVC sheathed with SWA variations.



Overall Screened SWA

Triples	Nominal diameter over bedding	Nominal diameter over armour	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)							
4	9.4	11.2	13.6	164	2.8	36	IGG183AA004
12	15	16.8	19.7	236	4.3	70	IGG183AA012
16	17.1	19.6	22.7	272	6.9	97	IGG183AA016
Conductor 1.5mm² (7/0.50mm)							
1	6.6	8.4	10.6	127	2	24	IGF184AA001
4	12.2	14	16.6	199	3.6	55	IGG184AA004
12	19.8	22.3	25.6	307	8	132	IGG184AA012

Individual and Overall Screened SWA

Triples	Nominal diameter over bedding	Nominal diameter over armour	Nominal overall diameter	Minimum bending radius	Maximum pulling tension	Approx. mass	Product code
	mm	mm	mm	mm	kN	kg/100m	
Conductor 0.5mm² (7/0.30mm)							
4	10.4	12.2	14.6	175	3.1	40	IGH183AA004
12	15.9	18.4	21.3	256	6.5	88	IGH183AA012
16	18.1	20.6	23.7	284	7.4	107	IGH183AA016
Conductor 1.5mm² (7/0.50mm)							
4	13.4	15.2	17.9	214	3.9	60	IGH184AA004
12	21	23.5	26.7	321	8.3	140	IGH184AA012

CURRENT RATINGS

Nexans Olex is dedicated to providing industry leading service. The following information is provided to assist in the selection of cables and gland accessories and includes a comprehensive listing of general data and current ratings as calculated in accordance with International Electrotechnical Commission Publication IEC 60287.



CURRENT RATINGS

2X1 CORE PVC

Single Phase Current Ratings
Two single core V-90 PVC or PVC/PVC 0.6/1kV cables.

Cond. size mm ²	Unenclosed space		Spaced from surface		Touching		Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts				Single phase voltage drop mV/A.m	
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al
1	16		16		13		13		11		6		18		18		21		51.6	
1.5	21		21		16		18		14		8		23		23		26		33.0	
2.5	30		29		23		24		20		12		32		32		36		18.0	
4	40		39		31		32		25		16		41		41		47		11.2	
6	51		49		40		41		33		20		52		52		58		7.50	
10	69		67		54		54		44		27		69		69		77		4.46	
16	92	72	89	69	72	56	70	54	56	43	36	28	122	95	89	69	99	77	2.81	4.68
25	124	96	119	92	97	75	94	73	75	58	48	38	158	123	116	90	129	100	1.78	2.95
35	153	119	145	113	119	92	112	87	90	70	59	46	190	147	139	108	155	120	1.29	2.14
50	187	145	177	137	146	113	138	107	110	86	-	-	225	174	168	130	186	145	0.96	1.58
70	238	184	223	173	184	143	170	132	136	105	-	-	277	215	206	160	228	177	0.680	1.10
95	295	229	276	214	230	178	212	164	169	131	-	-	332	257	252	195	278	215	0.507	0.804
120	344	267	321	249	267	208	242	188	193	150	-	-	378	294	287	223	316	245	0.415	0.644
150	395	307	367	285	308	239	282	219	225	175	-	-	424	329	329	255	354	274	0.352	0.535
185	459	357	424	331	358	279	320	249	256	199	-	-	480	374	373	291	408	317	0.301	0.439
240	549	427	505	394	428	334	381	298	305	238	-	-	556	434	438	342	472	368	0.255	0.352
300	636	495	582	456	495	388	-	-	628	491	496	388	546	425	425	0.229	0.300			
400	744	583	676	535	577	456	-	-	-	-	-	-	713	564	575	454	621	487	0.209	0.256
500	867	685	780	624	668	535	-	-	-	-	-	-	805	644	649	520	721	570	0.194	0.226
630	1014	808	897	730	770	627	-	-	-	-	-	-	904	737	750	611	816	652	0.181	0.202

CURRENT RATINGS

2X1 CORE XLPE

Single Phase Current Ratings

Two single core XLPE/PVC 90°C 0.6/1kV cables.

Cond. size mm ²	Unenclosed space		Spaced from surface		Touching		Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts		Single phase voltage drop			
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	mV/A.m	
1	20		20		16		16		13		8		20		20		24		54.1	
1.5	26		25		20		21		16		10		26		26		30		34.7	
2.5	36		36		28		30		24		14		36		36		41		18.9	
4	48		47		37		38		30		19		46		46		53		11.8	
6	61		60		47		47		38		24		58		58		66		7.87	
10	84		82		65		65		52		32		78		78		87		4.68	
16	112	87	108	84	86	67	84	65	67	52	43	33	139	107	100	78	112	87	2.95	4.91
25	151	117	145	112	117	91	113	87	90	70	58	45	179	139	131	102	146	114	1.87	3.08
35	186	144	177	137	144	111	135	105	108	84	72	56	215	167	157	122	175	136	1.35	2.24
50	228	177	216	167	176	136	166	129	133	103	-	-	255	198	189	147	211	164	1.01	1.65
70	291	226	273	212	224	174	204	159	164	127	-	-	313	243	233	181	258	200	0.710	1.15
95	361	280	338	262	278	216	255	198	204	158	-	-	375	291	285	221	309	239	0.528	0.840
120	422	328	393	305	325	253	292	226	233	181	-	-	427	332	325	252	358	278	0.431	0.672
150	486	377	451	350	375	291	329	255	263	204	-	-	480	372	365	283	401	311	0.365	0.557
185	565	439	522	406	436	340	387	301	309	241	-	-	543	423	423	329	463	359	0.311	0.455
240	678	527	622	485	522	408	461	360	369	288	-	-	630	492	497	388	536	417	0.262	0.363
300	787	612	718	562	605	473	-	-	-	-	-	-	711	556	562	440	620	482	0.233	0.307
400	923	723	836	660	708	559	-	-	-	-	-	-	808	638	653	516	706	553	0.211	0.261
500	1078	850	966	772	821	656	-	-	-	-	-	-	913	729	739	590	800	632	0.196	0.228
630	1261	1003	1113	904	950	772	-	-	-	-	-	-	1026	833	856	695	930	740	0.184	0.204

CURRENT RATINGS

2X1 CORE 110°C

Single Phase Current Ratings

Two single core R-HF-110, R-E-110 or X-HF-110°C insulated cables.

Cond. size mm ²	Unenclosed space		Spaced from surface		Touching		Conduit in air		Enclosed partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts		Single phase voltage drop		
	Cu		Cu		Cu		Cu		Cu		Cu		Cu		Cu		Cu		mV/A.m
1	25		24		20		20		16		10		31		23		26		57.4
1.5	32		31		25		25		20		13		39		29		33		36.8
2.5	45		44		36		35		28		18		55		40		46		20.1
4	59		58		47		46		37		23		71		53		59		12.5
6	75		73		59		58		46		30		89		66		74		8.35
10	103		99		81		78		62		40		119		88		97		4.97
16	137		131		107		104		83		53		154		115		127		3.12
25	183		175		143		137		109		72		198		148		163		1.99
35	225		214		176		165		132		88		238		177		195		1.43
50	276		261		215		205		164		-		282		214		236		1.07
70	349		328		272		255		204		-		346		262		288		0.751
95	434		406		339		321		257		-		416		321		352		0.556
120	505		471		394		369		296		-		473		366		400		0.453
150	581		540		454		430		344		-		531		420		448		0.382
185	673		624		527		493		394		-		601		477		517		0.323
240	806		743		630		594		476		-		698		561		600		0.271
300	934		857		730		-		-		-		789		648		694		0.240
400	1094		998		853		-		-		-		898		738		790		0.216
500	1278		1155		990		-		-		-		1018		837		921		0.199
630	1498		1334		1146		-		-		-		1148		973		1045		0.185

CURRENT RATINGS

2 CORE PVC

Single Phase Current Ratings
Two core V-90 PVC/PVC 0.6/1kV cables.

mm ²	Cond. Unenclosed size space		Touching		Enclosed conduit in air round or flat cable		Unenclosed and partially surrounded by thermal insulation		Unenclosed and completely surrounded by thermal insulation		Buried direct		Underground ducts		Single phase voltage drop	
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al
1	15		14		13		11		7		17		17		51.6	
1.5	19		18		16		14		9		21		21		33.0	
2.5	27		26		23		20		13		30		30		18.0	
4	37		34		30		27		17		39		39		11.2	
6	46		44		39		35		22		50		50		7.50	
10	64		60		52		48		30		66		66		4.46	
16	85	66	80	62	68	52	64	49	40	31	114	88	86	66	2.81	4.67
25	113	88	107	83	90	70	85	66	53	41	147	114	112	87	1.78	2.93
35	139	108	131	101	112	87	105	81	65	51	178	138	136	106	1.28	2.13
50	170	132	159	124	133	103	127	99	-	-	211	163	162	126	0.957	1.57
70	215	167	201	156	170	132	161	125	-	-	259	201	202	157	0.673	1.09
95	265	205	248	192	204	158	198	154	-	-	311	241	243	189	0.498	0.798
120	307	239	288	224	241	187	230	179	-	-	355	276	282	220	0.405	0.638
150	351	272	328	255	271	210	263	204	-	-	398	309	317	246	0.342	0.528
185	403	314	377	294	313	244	302	235	-	-	449	350	363	283	0.290	0.431
240	477	373	446	349	364	285	357	279	-	-	520	406	421	329	0.243	0.343
300	547	429	511	401	424	333	409	321	-	-	586	460	483	379	0.215	0.290
400	631	500	589	467	482	383	471	373	-	-	663	526	548	434	0.194	0.245
500	716	575	668	536	561	451	534	429	-	-	741	595	628	504	0.180	0.215

CURRENT RATINGS

2 CORE XLPE

Single Phase Current Ratings
Two core XLPE/PVC or X-HF-90 90°C 0.6/1kV cables.

mm ²	Cond. Unenclosed size space		Touching		Enclosed conduit in air round or flat cable		Unenclosed and partially surrounded by thermal insulation		Unenclosed and completely surrounded by thermal insulation		Buried direct		Underground ducts		Single phase voltage drop	
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al
1	18		17		16		14		9		19		19		54.1	
1.5	24		22		20		18		11		24		24		34.7	
2.5	34		31		28		25		16		34		34		18.9	
4	45		42		37		33		21		45		45		11.8	
6	57		53		46		42		27		56		56		7.85	
10	78		73		63		58		36		75		75		4.68	
16	104	81	97	75	82	63	78	60	49	38	132	102	98	75	2.95	4.90
25	140	109	131	102	110	85	105	81	66	51	170	132	128	99	1.86	3.08
35	173	134	162	125	132	102	129	100	81	63	205	159	154	119	1.35	2.23
50	211	163	197	153	162	126	158	122	-	-	244	189	185	144	1.00	1.65
70	268	208	250	194	200	155	200	155	-	-	300	233	228	177	0.703	1.15
95	331	257	309	239	250	194	247	192	-	-	360	279	279	216	0.520	0.835
120	385	299	359	279	285	222	287	223	-	-	410	319	318	247	0.423	0.666
150	441	342	411	319	332	257	328	255	-	-	460	357	365	283	0.355	0.550
185	509	396	473	369	377	293	379	295	-	-	520	405	413	322	0.299	0.448
240	604	472	562	439	448	350	449	351	-	-	603	471	485	379	0.249	0.355
300	694	544	645	505	523	410	516	404	-	-	680	533	558	437	0.219	0.298
400	804	636	745	590	596	472	596	472	-	-	771	610	663	501	0.198	0.249
500	915	734	848	680	695	557	678	544	-	-	862	691	728	583	0.182	0.218

CURRENT RATINGS

2 CORE 110°C

Single Phase Current Carrying Ratings
Two Core R-HF-110, R-E-110, X-HF-110.

Cond. size mm ²	Unenclosed space		Touching		Exposed to sun		Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts	
	Cu	Cu-Flex	Cu	Cu-Flex	Cu	Cu-Flex	Cu	Cu-Flex	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu-Flex
1	23	24	22	23	20	21	19	20	15	11	29	22	23			
1.5	29	30	28	28	25	26	24	24	19	14	37	28	29			
2.5	41	40	39	38	36	34	33	32	27	19	51	39	37			
4	55	53	51	50	47	45	45	43	36	26	67	51	49			
6	69	67	65	63	59	57	56	54	45	33	84	64	62			
10	95	94	89	88	81	80	76	75	60	45	112	85	84			
16	126	124	118	116	107	105	102	100	81	59	145	111	109			
25	168	163	158	154	142	138	133	129	107	79	188	144	139			
35	206	202	194	190	174	170	166	163	133	97	226	175	171			
50	251	254	236	238	211	213	200	202	160	-	268	208	209			
70	317	318	298	299	265	266	256	257	205	-	330	260	259			
95	392	381	367	357	326	317	312	303	250	-	396	313	304			
120	455	450	426	421	377	372	368	362	294	-	452	363	357			
150	519	515	486	482	429	425	417	412	333	-	507	409	403			
185	598	586	559	547	491	481	486	474	389	-	573	468	456			
240	708	698	662	652	580	570	588	577	470	-	665	554	541			
300	815	799	760	745	664	650	670	656	536	-	751	626	611			
400	941	949	878	884	763	767	768	801	615	-	853	711	727			
500	1074	1091	1000	1014	866	877	905	913	724	-	957	819	820			

CURRENT RATINGS

3X1 CORE PVC

Three Phase Current Ratings
Three single core V-90 PVC or PVC/PVC 0.6/1kV cables.

Cond. size mm ²	Unenclosed space		Spaced from surface		Touching		Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts		Three phase voltage drop mV/A.m					
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al				
1	16	14	13	12	10	6	16	16	19	44.7	51.6											
1.5	20	17	16	15	12	8	20	20	24	28.6	33.0											
2.5	29	25	23	21	17	12	27	27	33	15.6	18.0											
4	38	33	31	28	23	16	36	36	43	9.71	11.2											
6	49	42	40	35	28	20	45	45	53	6.49	7.50											
10	67	58	54	47	37	27	59	59	70	3.86	4.46											
16	89	69	77	59	72	56	62	48	50	39	36	28	104	81	78	60	90	70	2.43	4.05	2.81	4.05
25	120	93	103	80	97	75	81	63	64	50	48	38	134	104	100	78	117	91	1.54	2.55	1.79	2.55
35	148	115	127	98	119	92	100	78	80	62	59	46	160	124	122	94	140	108	1.12	1.85	1.29	1.85
50	181	141	156	121	146	113	119	92	95	74	-	-	190	147	144	112	168	131	0.834	1.37	0.970	1.37
70	230	179	197	153	184	143	152	118	122	94	-	-	233	181	180	140	205	159	0.589	0.952	0.690	0.956
95	287	222	246	191	230	178	183	142	147	114	-	-	279	216	217	168	250	194	0.439	0.696	0.519	0.702
120	335	260	287	223	267	208	217	169	173	135	-	-	317	247	252	196	283	220	0.359	0.558	0.429	0.565
150	385	298	330	256	308	239	244	190	195	152	-	-	356	276	283	220	317	246	0.305	0.463	0.368	0.472
185	447	347	383	299	357	278	284	222	227	177	-	-	402	313	325	253	365	284	0.261	0.380	0.320	0.391
240	535	417	457	358	426	334	331	259	265	207	-	-	465	364	377	295	422	329	0.221	0.305	0.277	0.319
300	620	483	529	415	492	387	388	305	311	244	-	-	524	412	434	341	488	380	0.198	0.260	0.253	0.276
400	726	570	615	488	573	455	442	351	353	281	-	-	593	471	492	391	553	434	0.181	0.222	0.223	0.240
500	846	669	710	571	661	532	523	421	418	337	-	-	668	537	571	459	641	507	0.168	0.196	0.221	0.216
630	990	789	817	668	760	622	588	481	471	385	-	-	748	612	639	523	723	578	0.157	0.175	0.209	0.197

CURRENT RATINGS

3X1 CORE XLPE

Three Phase Current Ratings

Three single core XLPE/PVC or X-HF-90 90°C 0.6/1kV cables.

Cond. size	Unenclosed space		Spaced from surface		Touching from surface	Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts		Three phase voltage drop mV/A.mm						
mm ²																						
	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al		
1	19	16	16	16	15	12	8	18	18	22	46.8	46.8										
1.5	25	21	20	18	15	15	10	22	22	27	30.0	30.0										
2.5	35	30	28	25	20	14	31	31	38	16.4	16.4											
4	46	40	37	33	26	19	40	40	49	10.2	10.2											
6	59	50	47	42	34	24	50	50	60	6.81	6.81											
10	81	69	65	56	45	32	67	67	79	4.05	4.05											
16	108	84	92	71	86	67	72	56	58	45	43	33	117	91	86	66	101	79.2	55	4.25	2.55	4.25
25	146	113	125	97	117	91	97	75	77	60	58	45	151	117	113	87	132	103	1.62	2.67	1.62	2.67
35	180	140	154	119	144	111	120	93	96	75	72	56	180	140	137	106	158	122	1.17	1.94	1.18	1.94
50	221	171	188	146	176	136	143	111	114	89	-	-	214	166	163	126	190	147	0.872	1.43	0.878	1.44
70	282	219	240	186	224	174	183	142	146	114	-	-	262	203	203	158	232	180	0.615	0.997	0.623	1.00
95	350	271	298	232	278	216	220	171	176	137	-	-	313	243	244	190	276	214	0.457	0.727	0.467	0.733
120	410	318	349	271	325	253	261	203	209	162	-	-	356	277	284	221	320	248	0.373	0.582	0.385	0.589
150	472	366	403	313	375	291	295	229	236	183	-	-	400	310	320	249	358	277	0.316	0.482	0.330	0.491
185	550	427	468	365	435	339	335	261	268	209	-	-	452	352	363	283	413	321	0.269	0.394	0.285	0.404
240	660	513	560	438	521	407	399	312	320	250	-	-	523	409	426	333	477	371	0.227	0.314	0.245	0.327
300	766	596	648	508	602	472	469	368	375	294	-	-	589	463	491	385	552	430	0.202	0.266	0.222	0.281
400	899	705	756	598	702	557	534	424	427	339	-	-	668	530	557	442	626	491	0.183	0.226	0.205	0.243
500	1051	829	874	703	812	652	633	509	506	407	-	-	752	604	648	520	707	559	0.170	0.197	0.193	0.216
630	1230	978	1010	824	938	765	714	583	571	466	-	-	843	688	727	593	820	654	0.159	0.177	0.182	0.198

CURRENT RATINGS

3X1 CORE 110°C

Three Phase Current Ratings

Three single core HFCS-110-IP 110°C 0.6/1kV cables.

Cond. size	Unenclosed space		Spaced from surface		Touching from surface	Enclosed conduit in air		Partially surrounded by thermal insulation		Completely surrounded by thermal insulation		Buried direct		Underground ducts		Three phase voltage drop mV/A.m	
mm ²																	
	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu	Cu
1	24	21	20	17	14	10	20	20	24	49.7	49.7						
1.5	31	27	25	22	18	13	25	25	30	31.9	31.9						
2.5	43	38	36	32	25	18	36	36	42	17.4	17.4						
4	57	50	47	41	33	23	46	46	54	10.8	10.8						
6	73	63	59	51	41	30	57	57	67	7.23	7.23						
10	99	86	81	71	57	40	77	77	88	4.3	4.3						
16	132	114	107	93	74	53	130	99	115	2.7	2.71						
25	177	153	143	125	100	72	168	130	148	1.72	1.72						
35	218	188	176	151	121	88	201	155	176	1.24	1.25						
50	267	230	215	182	146	-	237	184	212	0.924	0.929						
70	339	291	272	234	187	-	291	230	259	0.65	0.657						
95	422	363	339	285	228	-	348	277	315	0.481	0.491						
120	492	422	394	337	269	-	396	322	357	0.392	0.403						
150	565	486	453	382	306	-	445	362	400	0.331	0.344						
185	656	564	526	449	359	-	503	415	461	0.28	0.296						
240	786	674	629	548	439	-	583	492	533	0.235	0.252						
300	912	780	727	626	501	-	657	556	617	0.208	0.227						
400	1069	910	847	718	575	-	746	631	700	0.187	0.208						
500	1248	1053	981	865	692	-	843	736	815	0.172	0.195						
630	1462	1217	1132	983	787	-	947	827	920	0.160	0.184						

CURRENT RATINGS

3 & 4 CORE PVC

Three Phase Current Ratings
Three and four core V-90 PVC/PVC 0.6/1kV cables.

Cond. size	Unenclosed space		Touching		Enclosed conduit in air round or flat cable		Unenclosed and partially surrounded by thermal insulation		Unenclosed and completely surrounded by thermal insulation		Buried direct		Underground ducts		Three phase voltage drop	
															mV/A.m	
mm ²	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al
1	13	-	12	-	11	-	9	-	6	-	14	-	14	-	-	44.7
1.5	16	-	15	-	14	-	12	-	8	-	18	-	18	-	-	28.6
2.5	23	-	22	-	20	-	17	-	11	-	25	-	25	-	-	15.6
4	31	-	29	-	25	-	23	-	15	-	33	-	33	-	-	9.71
6	40	-	37	-	33	-	30	-	19	-	42	-	42	-	-	6.49
10	54	-	51	-	44	-	41	-	25	-	55	-	55	-	-	3.86
16	72	56	68	53	58	45	54	42	34	26	96	75	73	56	2.43	4.04
25	97	75	91	71	76	59	73	57	46	35	125	97	94	73	1.54	2.54
35	120	93	112	87	94	73	90	69	56	43	150	117	114	89	1.11	1.84
50	146	113	137	106	112	87	109	85	-	-	178	138	136	105	0.829	1.36
70	185	143	172	134	142	111	138	107	-	-	219	170	170	132	0.583	0.948
95	228	177	213	165	177	137	170	132	-	-	263	204	208	161	0.431	0.691
120	265	206	247	192	202	157	198	154	-	-	300	233	237	184	0.351	0.552
150	303	235	282	219	228	177	226	175	-	-	336	261	266	207	0.296	0.457
185	348	272	324	253	263	206	259	203	-	-	379	296	304	237	0.251	0.373
240	412	323	383	301	316	248	307	240	-	-	438	344	359	281	0.21	0.297
300	472	372	438	345	-	-	-	-	-	-	493	388	404	318	0.186	0.251
400	544	434	504	402	-	-	-	-	-	-	557	444	468	374	0.168	0.212
500	616	498	571	461	-	-	-	-	-	-	620	501	522	422	0.156	0.186

CURRENT RATINGS

3 & 4 CORE XLPE

Three Phase Current Ratings
Three and four core XLPE/PVC 90°C 0.6/1kV cables.

Cond. size	Unenclosed space		Touching		Enclosed conduit in air round of flat cable		Unenclosed and partially surrounded by thermal insulation		Unenclosed and completely surrounded by thermal insulation		Buried direct		Underground ducts		Three phase voltage drop	
															mV/A.m	
mm ²	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al	Cu	Al
1	16	-	14	-	13	-	12	-	7	-	16	-	16	-	-	46.8
1.5	20	-	19	-	16	-	15	-	9	-	20	-	20	-	-	30
2.5	28	-	26	-	24	-	21	-	13	-	29	-	29	-	-	16.4
4	38	-	35	-	30	-	28	-	18	-	37	-	37	-	-	10.2
6	48	-	45	-	38	-	36	-	22	-	46	-	46	-	-	6.8
10	66	-	62	-	53	-	49	-	31	-	63	-	63	-	-	4.05
16	88	68	83	64	68	53	66	51	41	32	110	85	81	63	2.55	4.24
25	119	93	111	86	91	71	89	69	56	43	143	111	107	83	1.61	2.67
35	147	114	137	106	114	88	110	85	69	53	172	133	130	101	1.17	1.93
50	180	140	168	130	136	105	134	104	-	-	204	159	155	120	0.868	1.43
70	229	178	213	165	173	134	170	132	-	-	251	195	193	150	0.609	0.993
95	283	220	263	204	209	162	210	163	-	-	302	234	233	181	0.45	0.723
120	330	256	306	238	246	192	245	190	-	-	344	267	270	210	0.366	0.577
150	377	293	350	272	277	216	280	218	-	-	385	299	304	236	0.307	0.476
185	436	340	404	315	322	251	323	252	-	-	435	340	348	272	0.259	0.388
240	517	405	479	375	386	303	383	300	-	-	504	395	411	322	0.216	0.307
300	594	467	549	432	-	-	-	-	-	-	567	446	463	365	0.19	0.258
400	685	546	632	504	-	-	-	-	-	-	640	510	524	417	0.171	0.216
500	779	629	718	579	-	-	-	-	-	-	714	577	601	485	0.158	0.189

Table of ratings are also applicable to armoured cables.

CURRENT RATINGS

3 & 4 CORE 110°C

Three Phase Current Ratings

Three and Four Core R-HF-110, R-E-110, or X-HF-110 insulated cables.

Cond. size mm ²	Unenclosed space		Touching		Exposed to sun		Enclosed conduit in air		Partially surrounded by thermal insulation	Completely surrounded by thermal insulation	Buried	Underground ducts		Three phase voltage drop	
	Cu	Cu-Flex	Cu	Cu-Flex	Cu	Cu-Flex	Cu	Cu-Flex				Cu	Cu	Cu-Flex	Cu
1	20	21	18	19	17	18	16	17	13	9	25	19	20	49.7	49.7
1.5	25	26	24	24	22	22	20	21	16	12	31	24	24	31.9	
2.5	35	34	33	32	30	29	29	27	23	17	44	33	31	17.4	17.4
4	47	45	44	42	40	39	38	36	30	22	56	43	41	10.8	10.8
6	59	57	56	54	50	49	47	46	38	28	71	53	51	7.22	7.22
10	81	80	76	75	69	68	64	65	51	38	94	71	71	4.29	4.29
16	107	106	101	99	91	89	86	84	68	50	122	93	91	2.70	2.70
25	144	140	135	131	121	118	116	112	93	67	158	122	118	1.71	1.71
35	177	173	166	162	148	145	140	137	112	83	190	146	143	1.24	1.24
50	216	218	202	204	180	182	174	175	139	-	226	177	178	0.920	0.920
70	272	273	255	255	227	227	217	217	173	-	277	217	217	0.645	0.645
95	337	327	314	306	278	271	270	263	216	-	333	267	259	0.475	0.475
120	391	387	364	360	322	318	311	306	249	-	379	304	298	0.385	0.385
150	447	444	416	413	367	364	360	356	288	-	426	346	341	0.322	0.322
185	515	505	479	470	421	412	411	402	329	-	481	391	381	0.271	0.271
240	611	602	567	559	496	488	498	489	398	-	558	463	453	0.224	0.224
300	701	688	650	638	567	555	-	-	-	-	629	522	509	0.196	0.196
400	810	817	751	756	651	655	-	-	-	-	713	608	606	0.175	0.175
500	921	936	852	865	737	746	-	-	-	-	797	680	680	0.160	0.160

CURRENT RATINGS

FLEXIBLE CORDS

Electrical Data and Current Ratings in accordance with AS/NZS 3008.1.1.

Nominal conductor area mm ²	Current carrying capacity A	Maximum DC resistance at 20°C Ω/km	Voltage drop single phase mV/A	Three phase mV/A
0.5	3	39.0	94.9	82.2
0.75	7.5	26.0	63.3	54.8
1.0	10	19.5	47.5	41.1
1.5	15	13.3	32.3	28.0
2.5	20	7.98	19.4	16.8
4.0	25	4.95	12.0	10.4

CURRENT RATINGS

WELDING CABLES

Current carrying capacity, welding applications.

No. cond area	A Maximum duty cycle (AS 1995)								Max. DC resistance mΩ/m at 20°C	Voltage drop mV/A.m		
	10 minute cycle				5 minute cycle					1 phase	3 phase	
	100%	60%	30%	25%	60%	30%	25%	mΩ/m				
10	90	91	99	102	96	114	121	1.91	5.06	4.38		
16	125	129	145	151	137	169	181	1.21	3.10	2.68		
25	165	175	206	218	188	239	257	0.780	1.88	1.63		
35	205	223	270	288	238	309	334	0.554	1.39	1.20		
50	260	289	361	386	308	407	440	0.386	1.05	0.906		
70	325	370	471	507	391	523	567	0.272	0.707	0.612		
95	390	454	590	637	476	644	700	0.206	0.566	0.490		
120	455	536	705	763	559	762	829	0.161	0.453	0.392		
150	535	636	843	914	661	904	985	0.129	0.373	0.323		
185	600	723	968	1051	747	1027	1120	0.106	0.326	0.282		
240	715	870	1174	1276	895	1236	1348	0.0801	0.276	0.239		

CURRENT RATINGS

ALUMINIUM AERIAL

XLPE Aerial Cables

No. conductor area	Nom and nominal diameter of wires	2 core twisted		3 and 4 core twisted		Three phase voltage drop at 50Hz
		1.0m/s		1.0m/s		
		still air	wind	still air	wind	
mm ²	no/mm					mV/A.m
16	7/1.70	49	78	44	70	4.15
25	19/1.35	64	105	59	97	2.64
35	19/1.53	78	125	72	120	1.94
50	19/1.78	94	150	88	140	1.47
70	19/2.14	115	190	110	175	1.08
95	37/1.78	140	230	135	215	0.840
120	37/2.03			155	250	0.718
150	37/2.25			180	280	0.636

Note: The current carrying capacities are based on an air ambient temperature of 40°C, a maximum conductor temperature of 80°C and exposure to direct sunlight having an intensity of 1000W/m². The values are based on the use of black XLPE.

Under normal circumstances there will always be some air movement and the rating for 1.0m/s wind is recommended.

General Note – applies to all following current rating tables.

Reference should be made to AS/NZS 3008.1 for the following derating factors for

- Grounded circuits
- Cables fixed to underside of ceilings
- Cables on perforated or unperforated trays
- Ambient temperature

CURRENT RATINGS

COPPER AERIAL

PVC Aerial Cables

No. cond. area	Nom and nominal diameter of wires	1 core insulated conductors	2 and 3 core (a) parallel webbed		3 and 4 core (b) twisted		Three phase voltage drop at 50Hz	
			1.0m/s	wind	1.0m/s	wind		1.0m/s
mm ²	no/mm	still air	wind	still air	wind	still air	wind	mV/A.m
6	7/1.04	35	70	30	50	26	48	6.71
10	7/1.35	48	96	40	68	36	65	4.02
16	7/1.70	65	125	52	90	47	85	2.56
25	19/1.35	88	165			63	115	1.67
35	19/1.53	105	205					1.26
50	19/1.78	130	240					0.988
70	19/2.14	165	305					0.767
95	37/1.78	200	360					0.639
120	37/2.03	235	425					0.574
150	37/2.25	265	475					0.530
185	37/2.52	310	540					0.494

Note: The current carrying capacities are based on an air ambient temperature of 40°C, a maximum conductor temperature of 75°C and exposure to direct sunlight having an intensity of 1000W/m².

The values are based on the use of black PVC.

(a) Also for 2 conductor neutral screened aerial cable.

(b) Also for 3 and 4 conductor neutral screened aerial cable.

Under normal circumstances there will always be some air movement and the rating for 1.0m/s wind is recommended.

CABLE SELECTION

1. Current carrying capacity and voltage drop

Conductor sizes are nominated by the Wiring Rules (AS/NZS 3000) for the wiring of socket outlets and lighting circuits in domestic and commercial buildings.

For other types of installations:

- The cable must be capable of carrying the maximum continuous load of the circuit, with due regard for the insulating material and conditions of installation.
- The voltage drop from the consumer's terminals to any point in the installation must not exceed 5% of the nominal system voltage.

Simplified tables of current ratings and voltage drops for commonly used cables are given on pages 70-92. In large installations where current ratings are critical, attention is drawn to the comprehensive tables given in AS/NZS 3008.1.1:2009.

2. Installation conditions

Nexans Olex cables are available for aerial, underground and submarine installations as well as in conduit, on racks or trays in air. Special constructions available include:

- Brass or copper taped or nylon sheathed cables for resistance to termite and marine borer.
- Steel wire armoured for areas where there is a high risk of mechanical damage.
- Alsecure® fire performance low smoke halogen free cables for emergency power and lighting and other purposes in areas of high fire risk.
- Alsecure® Ceramifiable® is a world first in fire performance cable with a polymer layer that hardens into a protective shield when exposed to fire.
- Versolex® the new high performance multipurpose cable for fixed and flexible applications.
- Lead alloy sheathing as a barrier to moisture or hydrocarbons.
- Alsecure® Envirolex® cables with low smoke emission and no halogen or lead for environmentally sensitive areas.
- Flexolex® cables for flexible applications and where flexibility provides advantages during installation.

CABLE SELECTION

3. Cable insulating and sheathing materials

Standard Nexans Olex cables are available in a number of materials, including:

- Nexans Olex PVC (Polyvinyl Chloride) insulated and sheathed cables are the economic choice for general wiring. They are resistant to occasional contact with most oils and solvents, clean and easy to handle and coloured to assist phase identification. PVC is suitable for operating temperatures up to 90°C and 90°HT, subject to the requirements of AS/NZS-3000. PVC is inherently resistant to ultraviolet radiation and although some colours may fade the material will not significantly degrade due to the effects of sunlight and weather, maintaining its physical integrity if not physically abused. Care should be taken where cables are subjected to extremes of temperature or contact with crude petroleum, caustic materials or aromatic solvents.
- Nexans Olex synthetic rubber (EPR/CPE) insulated and sheathed cables are more flexible and have better resistance to oils and solvents than PVC.
- Nexans Olex EPR (Ethylene Propylene Rubber), while not oil resistant, has excellent dielectric properties and high voltage grades are available for cables up to 33kV. In addition, EPR is halogen free and therefore does not emit toxic or corrosive by-products when burned.
- Nexans Olex CPE (Chlorinated Polyethylene) is an excellent flexible insulation and heavy duty sheathing material. Although having lower insulation resistance than EPR it is suitable for low voltage cable insulation and is used as such in welding cables because of its oil resistance.
- X-90 (Cross-linked Polyethylene) has very high dielectric properties. It is halogen-free and also free of heavy metals such as lead and antimony. It has low smoke and toxicity when burned. It is a suitable alternative to PVC and is becoming more widely specified where there are environmental concerns.
- Ceramifiable® – An insulation material that is polymeric in its normal state, but converts to an insulating ceramic that provides circuit integrity when burned. Normal state properties are suitable for continuous operation at 90°C or 110°C as selected. It is halogen-free, lead and antimony-free, and does not emit toxic or corrosive products when burned.
- HFS-110-TP: Nexans Olex offers this thermoplastic, halogen and heavy metal-free sheathing as an alternative to PVC when these characteristics are required. The material has reasonable oil resistance and flexibility, with a high resistance to spread of fire.

CABLE INSTALLATION

In all cases, cables must be installed in compliance with the safety requirements of AS/NZS 3000.

Particular attention should be paid to the following:

- Current carrying capacities of cables depend on the temperature of the air or ground in which they are installed and the degree to which heat can escape. Except for a group of single core cables carrying the phase currents of a circuit, cables should be spaced to allow heat to escape.
 - Wherever cables are installed in close proximity, especially in the ground, or enclosed in such a way as to restrict heat loss, their current carrying capacities must be reduced using a derating factor appropriate to the situation.
 - For minimum voltage drop single core cables carrying the phase currents of a single circuit should be installed as closely as possible together, to minimise inductive reactance. The preferred formation for three phase conductors is a “trefoil” or cloverleaf pattern although flat formation may also be used. Sheaths should be in contact with one another in either case.
- A single core cable generates an alternating magnetic field around itself which can cause large increases in voltage drop and power loss due to “transformer effect” when ferrous metal (iron and steel) is allowed to encircle the cable. Steel racking or ladder will not cause trouble, but the following must be observed:
- Steel wire or tape armour is never used on a single core cable for AC use.
 - Where three single phase cables pass through a steel bulkhead all must pass through the same hole. Where glanding is required it is usual to cut out a panel and replace this with a non-ferrous (metal or plastic) plate in which the three or four glands are mounted. Should plastic or non-ferrous gland plate material not be available, an alternative is to cut a slot (hacksaw blade width is adequate) between adjacent gland holes. This will provide physical and electrical isolation for the eddy current paths and stop the cable from overheating.

GENERAL DATA

Minimum size of copper earthing conductors

Nominal area active conductors	For copper active conductors	For aluminium active conductors
mm ²	mm ²	mm ²
1	1.0*	
1.5	1.5*	
2.5	2.5	
4	2.5	
6	2.5	2.5
10	4	2.5
16	6	4
25	6	6
35	10	6
50	16	10
70	25	10
95	25	16
120	35	25
150	50	25
185	70	35
240	95	50
300	120	70
400	120	95
500	120	95
630	120	120

*Refer Wiring Rules, AS/NZS 3000 regarding 1.5 earthing conductors.

Maximum operating temperatures for various types of cable insulants

Type		Normal use* °C	Max permissible °C
Thermoplastic (PVC)	V-75	75	75
	V-90	75	90
	V-90HT	90	90**
Elastomer	R-EP-90	90	90
	R-CPE-90	90	90
	R-S-150	150	150
Polyethylene – low density		70	70
Cross linked polyethylene (X-90)		90	90
Nexans Olex Ceramifiable®	R-E-110	110	110
	HF-I-90	90	90

*As defined in AS/NZS 3008.1.1.

**V-90HT PVC may be operated up to 105°C for restricted periods only.

GENERAL DATA

DC Conductor resistances for insulated cables for fixed installations. Solid, stranded conductors; also refer to AS/NZS 1125.

Nominal conductor area mm ²	Conductor type	Single core or multicore		
		Maximum DC resistance at 20°C Ω/km		
		Copper Plain	Copper Tinned	Aluminium
0.5	Solid	36.0	36.7	
1.0*	Solid	18.1	18.2	
1.0	Stranded	21.2	21.6	
1.5*	Solid	12.1	12.2	
1.5	Stranded	13.6	13.8	
2.5*	Solid	7.41	7.56	
2.5	Stranded	7.41	7.56	
4	Stranded	4.61	4.70	
6	Stranded	3.08	3.11	
10	Stranded	1.83	1.84	
16	Stranded	1.15	1.16	1.91
25	Stranded	0.727	0.734	1.20
35	Stranded	0.524	0.529	0.868
50	Stranded	0.387	0.391	0.641
70	Stranded	0.268	0.270	0.443
95	Stranded	0.193	0.195	0.320
120	Stranded	0.153	0.154	0.253
150	Stranded	0.124	0.126	0.206
185	Stranded	0.0991	0.100	0.164
240	Stranded	0.0754	0.0762	0.125
300	Stranded	0.0601	0.0607	0.100
400	Stranded	0.0470	0.0475	0.0778
500	Stranded	0.0366**	0.0369**	0.0605**
630	Stranded	0.0283**	0.0286**	0.0469**

*Single strand conductors only (solid).

**Single core values.

GENERAL DATA

USEFUL 3 PHASE

FORMULA

$$kW = kVA \times pf$$

$$kW = \frac{hp \times 746}{1000 \times Eff}$$

$$kW = \frac{\text{Line Amps} \times \text{Line Volts} \times 1.732 \times pf}{1000}$$

$$kVA = \frac{kW}{pf}$$

$$kVA = \frac{hp \times 746}{1000 \times Eff \times pf}$$

$$kVA = \frac{\text{Line Amps} \times \text{Line Volts} \times 1.732}{1000}$$

$$\text{Line Amps} = \frac{kW \times 1000}{\text{Line Volts} \times 1.732 \times pf}$$

$$\text{Line Amps} = \frac{kVA \times 1000}{\text{Line Volts} \times 1.732}$$

$$\text{Line Amps} = \frac{hp \times 746}{\text{Line Volts} \times 1.732 \times Eff \times pf}$$

$$\text{Horsepower (hp)} = \frac{kW \times 1000 \times Eff}{746}$$

$$hp = \frac{kVA \times 1000 \times Eff \times pf}{746}$$

$$hp = \frac{\text{Line Amps} \times \text{Line Volts} \times 1.732 \times Eff \times pf}{746}$$

$$\text{Line Current} = \frac{5}{100} \times \text{Supply Voltage} \times \frac{1}{\text{Route Length} \times \text{Voltage Drop}}$$

Factor

GENERAL DATA

American conductor sizes M.C.M. & A.W.G. conversion to mm².

M.C.M.	mm ²	M.C.M.	mm ²
1300	659	650	329
1200	608	600	304
1100	557	550	279
1000	507	500	253
950	481	450	228
900	456	400	203
850	431	350	177
800	405	300	152
750	380	250	127
700	355	200	101

Note: The American term "mil" refers to a milli-inch (1/1000N) NOT a millimetre. A Circular Mil, (C.M.) is the area of a circle 1 mil in diameter. The term "M.C.M." refers to an area of 1000 Circular Mils and is the same as "kcmil." 1.0mm² is approximately 1974 Circular Mils.

A.W.G.	Diameter	mm ²	A.W.G.	Diameter	mm ²
	mm			mm	
0000	11.68	107.3	10	2.59	5.3
000	10.40	85.0	12	2.05	3.3
00	9.27	67.4	14	1.63	2.1
0	8.25	53.5	16	1.29	1.3
2	6.54	33.6	18	1.02	0.8
4	5.19	21.2	20	0.81	0.5
6	4.12	13.3	22	0.64	0.3
8	3.25	8.4	24	0.51	0.2

Note: The American Wire Gauge (AWG) was originally known as the Brown & Sharp (B&S) Gauge and both terms are synonymous. The gauge number can apply to a single wire or to a stranded or bunched conductor. The cross-sectional areas given apply to single wire only. The larger gauges are sometimes written using a number to denote the number of zeroes, e.g. 0 gauge can be written 1/0 and 000 as 3/0.

GENERAL DATA

Cable minimum installed bending radii

		Factor			
Type	Voltage	Instal.	During instal.		
Fixed wiring	PVC or Elastomer or XLPE				
	(1) Single and Multicore				
	(a) Overall diameter to & including 25mm	0.6/1kV	4	6	
	(b) Overall diameter over 25mm	0.6/1kV	6	9	
	(2) Multicore SWA or metal tape	0.6/1kV	12	18	
Flexible cords	(3) Solid aluminium, Stranded or sector	0.6/1kV	8	12	
	PVC or Elastomer	250/440V	4		
		0.6/1kV	4		
		0.6/1kV	4		
Flexible cables	PVC or Elastomer (incl. Versolex®)	0.6/1kV	4		
Lead sheath	PVC or Elastomer	0.6/1kV	12	18	
Paper insulated	Single	Up to 11kV	15	22	
		Up to 12 18			
	Multicore	11kV	12	18	
		22kV	18	27	
	Single Core	22kV	15	22	
		33kV	20	30	
	Multicore	33kV	18	27	
	Trailing	Elastomer			
		(1) Single and Multicore	1.1kV	6	
Welding	(2) Single and Multicore	3.3kV & above	12		
	PVC or Elastomer	0.6/1kV	6		
	Nylon covered	All cables	20	30	
HDPE sheathed	All cables	15	25		

Factor x cable overall diameter = minimum internal bending radius.

Motor current table, Amperes (approx.)

Power kW	hp	Single phase 230V	Three phase 400V	Single phase 240V	Three phase 415V
0.37	0.5	4.2	0.9	4.0	0.90
0.55	0.75	5.2	1.3	5.0	1.3
0.75	1	7.2	1.7	6.9	1.7
1.1	1.5	10.0	2.4	9.6	2.3
1.5	2	10.1	3.1	9.7	3.0
2.2	3	13.8	4.6	13.3	4.5
4	5	26.1	7.9	25.0	7.6
5.5	7.5	34.5	11.2	33.0	10.8
7.5	10		14.9		14.4
9.3	12.5		18.7		18.0
11	15		22.4		21.6
15	20		29.9		28.8
18.5	25		38.0		36.6
22	30		44.8		43.2

GENERAL DATA

Number of cables in conduit. Recommended maximum number of thermoplastic insulated unsheathed single core 0.6/1kV copper or aluminium cables permitted in metallic and non-metallic conduit or pipe.

Nominal area mm ²	Nominal size of conduit (mm)													
	16 LD	20 LD	20 HD	25 LD	25 HD	32 LD	32 HD	40 LD	40 HD	50 LD	50 HD	63 LD	63 HD	80 HD
1	7	12	10	21	18	36	33	60	55	96	89	-	-	-
1.5	5	10	8	17	15	30	27	48	45	78	73	129	120	-
2.5	4	7	6	12	11	22	20	36	33	58	54	95	89	-
4	2	4	4	8	7	14	13	23	21	37	34	61	56	120
6	2	3	3	6	5	11	10	18	16	29	27	47	44	93
10	1	2	2	4	4	8	7	13	12	21	19	34	32	67
16	1	2	1	3	3	6	5	9	9	15	14	26	24	51
25	1	1	1	2	2	4	3	6	6	10	9	17	16	34
35	-	1	1	1	1	3	2	5	4	8	7	14	13	27
50	-	1	-	1	1	2	2	3	3	6	5	10	9	20
70	-	-	-	1	1	1	1	3	2	4	4	8	7	15
95	-	-	-	-	1	1	2	1	3	3	5	4	10	
120	-	-	-	-	1	1	1	1	2	2	4	3	8	
150	-	-	-	-	-	1	-	1	1	2	1	3	3	6
185	-	-	-	-	-	-	-	1	1	1	2	2	5	
240	-	-	-	-	-	-	-	1	-	1	1	2	1	4
300	-	-	-	-	-	-	-	-	-	1	1	1	1	3
400	-	-	-	-	-	-	-	-	-	1	-	1	1	2
500	-	-	-	-	-	-	-	-	-	-	-	1	1	2
630	-	-	-	-	-	-	-	-	-	-	-	1	1	1

Notes: 1. For PVC flexible conduits, the recommendations are based on conduits used without fittings or with fittings only at the ends of the conduit run. Where intermediate fittings are used in a run of PVC flexible conduit, an appropriate reduction should be made in the number of cables drawn into the conduit. 2. One earth wire of appropriate size, as determined by the requirements of AS/NZS 3000, may be inserted in all conduits, provided that its insertion does not prevent easy drawing in of cables. 3. Table suitable for use with Nexans Olex manufactured product only.

GENERAL DATA

Number of cables in conduit. Calculated maximum number of thermoplastic insulated and sheathed single core copper or aluminium cables permitted in metallic and non-metallic conduit or pipe. 1 1.0 to 25mm² 450/750V to AS/NZS 5000.2 1 35 to 630mm² 0.6/1kV to AS/NZS 5000.1.

Nominal area mm ²	Nominal size of conduit (mm)								
	20 HD	25 HD	32 HD	40 HD	50 HD	63 HD	80 HD	100 HD	150 HD
1.0	5	9	16	27	43	72	152	–	–
1.5	4	7	13	22	36	59	126	–	–
2.5	3	5	10	16	27	44	93	155	–
4	2	4	7	12	19	32	67	112	–
6	1	3	6	9	16	26	56	93	–
10	1	2	4	7	11	18	40	66	131
16	1	1	3	5	8	14	30	51	100
25	–	1	2	3	5	9	19	32	64
35	–	1	1	2	4	7	16	27	54
50	–	–	1	2	3	6	13	21	42
70	–	–	1	1	3	4	10	17	34
95	–	–	–	1	2	3	7	12	24
120	–	–	–	1	1	3	5	9	19
150	–	–	–	1	1	2	4	8	16
185	–	–	–	–	1	1	4	6	13
240	–	–	–	–	1	1	3	5	10
300	–	–	–	–	–	1	2	4	8
400	–	–	–	–	–	1	2	3	6
500	–	–	–	–	–	–	1	2	5
630	–	–	–	–	–	–	1	2	4

Notes: 1. For PVC flexible conduits, the recommendations are based on conduits used without fittings or with fittings only at the ends of the conduit run. Where intermediate fittings are used in a run of PVC flexible conduit, an appropriate reduction should be made in the number of cables drawn into the conduit. 2. One earth wire of appropriate size, as determined by the requirements of AS/NZS 3000, may be inserted in all conduits, provided that its insertion does not prevent easy drawing in of cables. 3. Table suitable for use with Nexans Olex manufactured product only.

GENERAL DATA

Cables in conduit and pipe – space factors.

One cable in conduit or pipe	50%
Two cables in conduit or pipe	33%
Three or more in conduit or pipe	40%


Note: The above values should not be exceeded.

Maximum safe pulling tension.

Conductor area mm ²	Maximum tension kN per conductor		Conductor area mm ²	Maximum tension kN per conductor	
	Copper	Aluminium		Copper	Aluminium
1.5	0.11	0.08	25	1.75	1.25
2.5	0.18	0.13	35	2.45	1.75
4	0.28	0.20	50	3.50	2.50
6	0.42	0.30	70	4.90	3.50
10	0.70	0.50	95	6.65	4.75
16	1.12	0.80			

(1kN = 102kgf)

ACCESSORIES GLANDS




Alco Metal Cable Glands – Type UW (IP68)

Item number	Mounting thread dia.x.length mm	Cable details				PVC shroud orange*
		Seal B (thick)		Seal A (thin)		
		OA	OA	OA	OA	
ALCUW12	M12x10	1.5	3.5	3.5	6.0	ALCSG0
UW16S	M16x10	1.5	3.5	3.5	5.0	ALCSG0
ALCUW16	M16x10	5.0	7.5	7.5	10.0	ALCSG0
UW20A	M20x10	5.0	7.5	7.5	10.0	ALCSG1
ALCUW20	M20x10	10.0	11.0	11.0	15.0	ALCSG1
ALCUW25	M25x12	14.5	17.0	17.0	20.0	ALCSG3
ALCUW32	M32x12	20.0	23.0	23.0	26.5	ALCSG3
ALCUW40	M40x15	26.0	30.0	30.0	33.5	ALCSG4
ALCUW50	M50x15	33.0	36.0	36.0	42.0	ALCSG5
ALCUW63	M63x19	41.5	46.0	46.0	52.0	ALCSG6
ALCUW75	M75x19	51.0	56.0	56.0	65.0	ALCSG7
ALCUW90	M90x30	64.0	68.0	68.0	75.0	ALCSG9
ALCUW105	M105x30	75.0	80.0	82.0	89.0	ALCSG10
ALCUW120A	M120x30	89.0	92.0	92.0	98.0	ALCSG11
ALCUW120B	M120x30			98.0	105.0	ALCSG11

*For Black Shroud add "B" to part number: ALCSG2B.

Note: To comply with IP68 approval, the washer supplied must be installed on mounting thread.

ACCESSORIES GLANDS



Alco Metal Cable Glands – Hazardous Area Type HUW


(Grp/IIc, Ex d, Ex e, IP68)(AUS Ex 03 3903)

Item number	Mounting thread dia.x.length mm	Cable details						PVC shroud (orange)
		Seal C (thickest)		Seal B (thick)		Seal A (thin)		
		OA	OA	OA	OA	OA	OA	
ALCHUW20SB	M20x12			4.0	8.0	8.0	10.0	ALCSG1
ALCHUW20A	M20x12			6.5	8.0	8.0	10.0	ALCSG3
ALCHUW20B	M20x12			10.0	12.0	12.0	14.0	ALCSG3
ALCHUW25	M25x12			14.0	16.0	16.0	19.0	ALCSG3
ALCHUW32	M32x15			19.0	22.0	22.0	25.0	ALCSG3
ALCHUW40	M40x15			25.0	28.5	28.5	31.0	ALCSG4
ALCHUW50	M50x20	31.0	36.0	36.0	39.0	39.0	42.0	ALCSG6
ALCHUW63	M63x25	42.0	46.5	46.5	50.0	50.0	53.0	ALCSG7
ALCHUW75	M75x25	53.0	57.0	57.0	61.0	61.0	64.0	ALCSG7
ALCHUW90	M90x30			64.0	68.0	70.0	75.0	ALCSG9
ALCHUW105	M105x30			75.0	80.0	82.0	89.0	
ALCHUW120A	M120x30			89.0	92.0	92.0	98.0	
ALCHUW120B	M120x30					98.0	105.0	

*For black shroud add "B" to part number: ALCSG2B.

Note: To comply with IP68 approval, the washer supplied must be installed on mounting thread.

ACCESSORIES GLANDS



Alco Metal Cable Glands – Type AW (IP68)


Item number	Mounting thread dia.xlength	Cable details				PVC shroud
		overall		over bedding	SWA	
		min.	max.	max.	dia.	
	mm	mm	mm	mm	mm	(orange)
ALCAW16	M16x12	10.5	15.5	10.0	0.8-1.25	ALCSG2
ALCAW20SB	M20x12	10.5	15.5	10.0	0.8-1.25	ALCSG1
ALCAW20MR	M20x12	14.5	17.5	11.5	0.8-1.25	ALCSG1
ALCAW20	M20x12	14.5	20.0	14.0	0.8-1.25	ALCSG3
ALCAW20UR	M20x12	19.5	22.5	16.0	0.8-1.25	ALCSG3
ALCAW25	M25x14	20.0	26.0	19.0	1.25-1.6	ALCSG3
ALCAW32	M32x14	26.0	33.5	26.0	1.25-1.6	ALCSG4
ALCAW40	M40x15	33.0	42.0	33.0	1.6-2.0	ALCSG5
ALCAW50	M50x15	41.5	51.0	42.0	2.0-2.5	ALCSG6
ALCAW50L	M50x15	49.0	56.0	44.5	2.50	ALCSG6
ALCAW63	M63x19	51.0	64.0	55.0	2.5-3.15	ALCSG7
ALCAW63L	M63x19	62.0	69.0	56.5	2.5-3.15	ALCSG7
ALCAW75	M75x19	63.0	75.0	63.0	2.5-3.15	ALCSG8
ALCAW90	M90x19	75.0	90.0	75.0	2.5-3.15	ALCSG9

*For black shroud add "B" to part number: ALCSG2B.

Note: To comply with IP68 approval, the washer supplied must be installed on mounting thread.

Two weatherproof seals are provided with each gland. Fitting instructions will define the seal suitable for your application.

ACCESSORIES GLANDS

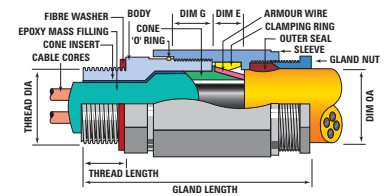


Alco Metal Cable Glands – Hazardous Area Type HAW (Grp/IIc, Ex d, Ex e, IP68)(AUS Ex 03.3904)

Item number	Mounting thread diameter	Cable details				SWA diameter	Barrier gland requirements	PVC shroud
		Over bedding		Cable				
		diameter	diameter	diameter				
	xlength	min.	max.	min.	max.	mm		(orange)
	mm	mm	mm	mm	mm	mm		
ALCHAW20LR	M20x15	5.2	8.0	7.8	12.7	0.70-0.90	ALCHAW20LR-B	ALCSG1
ALCHAW20	M20x20	6.5	10.0	11.5	16.0	0.80-1.25	ALCHAW20-B	ALCSG2
ALCHAW20SB	M20x16	9.1	12.3	14.0	18.0	0.80-1.25	ALCHAW20SB-B	ALCSG2
ALCHAW25A	M25x20	10.0	14.0	16.0	20.0	0.80-1.25	ALCHAW25A-B	ALCSG3
ALCHAW25B	M25x20	14.0	18.0	20.0	24.0	1.25-1.60	ALCHAW25B-B	ALCSG3
ALCHAW32A	M32x20	18.0	21.5	24.0	28.0	1.25-1.60	ALCHAW32A-B	ALCSG4
ALCHAW32B	M32x20	21.5	25.0	28.0	32.0	1.60-2.00	ALCHAW32B-B	ALCSG4
ALCHAW40A	M40x20	25.0	29.0	32.0	37.0	1.60-2.00	ALCHAW40A-B	ALCSG4
ALCHAW40B	M40x20	28.5	33.5	37.0	42.0	1.60-2.00	ALCHAW40B-B	ALCSG5
ALCHAW50A	M50x20	33.0	37.5	41.0	46.0	2.00-2.50	ALCHAW50A-B	ALCSG6
ALCHAW50B	M50x20	36.5	42.0	45.0	51.0	2.00-2.50	ALCHAW50B-B	ALCSG6
ALCHAW63A	M63x25	42.0	47.0	51.0	57.0	2.50-3.15	ALCHAW63A-B	ALCSG7
ALCHAW63B	M63x25	47.0	53.0	57.0	63.0	2.50-3.15	ALCHAW63B-B	ALCSG7
ALCHAW75A	M75x25	52.5	58.5	62.0	69.0	2.50-3.15	ALCHAW70A-B	ALCSG8
ALCHAW75B	M75x25	58.0	64.0	66.0	75.0	2.50-3.15	ALCHAW70B-B	ALCSG8
ALCHAW90A	M90x25	63.0	69.0	73.0	82.0	2.50-3.15	ALCHAW90A-B	ALCSG9
ALCHAW90B	M90x25	68.0	75.0	81.0	90.0	2.50-3.15	ALCHAW90B-B	ALCSG9

Note: Alco HAW glands are suitable for use with elastomer seals or as a barrier gland. Two seals are provided for bedding to body sealing (see fitting instructions). Alternatively, discard the seals and use the epoxy resin and insert to provide a barrier. When ordering add 'B' to the standard code as indicated in the second last column above.


ACCESSORIES EARTH TAGS



Alco Earth Tags – Nickel Plated

Item number	Description	Width	Width	Depth	Width
		Dim. A	Dim. C	Dim. B	Dim. F
		(+0.5, -0.0)	(+0.5, -0.0)		(+0.5, -0.0)
ALCET12	EARTH TAG, 12mm, BRS, PLTD	28.85	12.45	1.80	7.00
ALCET12	EARTH TAG, 12mm, BRS, PLTD	22.50	12.45	1.80	7.00
ALCET16	EARTH TAG, 16mm, BRS, PLTD	28.85	16.48	1.80	7.00
ALCET20	EARTH TAG, 20mm, BRS, PLTD	28.86	20.40	1.80	7.00
ALCET25	EARTH TAG, 25mm, BRS, PLTD	37.55	25.50	1.80	10.50
ALCET32	EARTH TAG, 32mm, BRS, PLTD	43.30	32.64	1.80	12.00
ALCET40	EARTH TAG, 40mm, BRS, PLTD	54.85	40.80	1.80	13.50
ALCET50	EARTH TAG, 50mm, BRS, PLTD	66.40	51.25	2.00	13.50
ALCET63	EARTH TAG, 63mm, BRS, PLTD	80.83	63.95	2.00	13.50
ALCET75	EARTH TAG, 75mm, BRS, PLTD	103.93	76.13	2.00	13.50
ALCET90	EARTH TAG, 90mm, BRS, PLTD	127.02	91.35	2.00	13.50
ALCET105	EARTH TAG, 105mm, BRS, PLTD	138.60	106.58	2.00	13.50
ALCET120	EARTH TAG, 120mm, BRS, PLTD	161.65	121.80	2.00	13.50

ACCESSORIES SHROUDS



Alco Gland Shrouds

Flexible rubber shrouds for the protection of Alco glands.

Item number	Cable dia. (A)	Overall Length (F)	Parallel Length (B)	Outside dia. (D)	Inside dia. (C)
	mm	mm	mm	mm	mm
ALCSG0	2.0	44	20	22	20
ALCSG1	6.0	69	43	28	25
ALCSG2	10.0	76	50	32	29
ALCSG2L	12.0	87	55	38	35
ALCSG3	14.0	96	60	43	40
ALCSG3L	18.0	100	65	47	44
ALCSG4	20.0	108	65	54	51
ALCSG5	29.0	115	70	65	62
ALCSG6	38.0	126	75	78	75
ALCSG6L	42.0	127	80	85	81
ALCSG7	48.0	135	85	95	91
ALCSG8	62.0	140	90	109	104
ALCSG9	62.0	170	110	120	114
ALCSG10	78.0	135	88	130	124
ALCSG11	87.0	137	88	130	144

Standard colour for all shrouds is orange. Sizes 1, 2 and 2L are stocked in black.

For black shroud part numbers add B to the orange item number in the LH column.

THE NEXANS OLEX CABLE RANGE

LOW VOLTAGE POWER AND CONTROL CABLES

Building wires

Flats

PVC/PVC SDIs

XLPE/PVC single cores

PVC/PVC circulars

XLPE/PVC multicores

Armoured PVC/PVC circulars

Armoured XLPE/PVC multicores

Multicore control

Armoured control

Neutral screened

Aerial

FIRE PERFORMANCE CABLES

Alsecure® Premium

Alsecure® Plus

Alsecure® Envirolex®

INSTROLEX INSTRUMENTATION CABLES

Overall screened

Overall screened armoured

Individual and overall screened

Individual and overall screened armoured

FLEXIBLE POWER

Versolex® – XLPE/TPE

– Power

– Welding

– Submersible

Titanex®

PVC/PVC power

PVC/PVC control

DATA AND COMMUNICATIONS CABLES

Datolex® – Security

– Figure 8

– Category 5e

– Coaxial

Gardolex™ Garden Lighting

Audiolex® – Speaker

– Coaxial

Fibre – Multi Mode

– Single Mode

Telephone – Internal

– External

Data

MINING CABLES (FLEXIBLE) TO 33KV

Reeling and trailing cables to AS/NZS-1802 and 2802

Feeder cables

Machine cables

SPECIALISED INDUSTRIAL CABLES

Airport lighting cables:

– Primary and secondary cables

Automation cables

Offshore Oil and gas cables

Defence cables – AO 14,000

– VG cables

– Milspec cables

Rolling stock cables

Materials handling cables

Marine cables

Wind turbine cables

VARIABLE SPEED DRIVE CABLES

Extra High Voltage U/G XLPE to 330kV (joints, terminations, engineering services, condition monitoring)

BARE OVERHEAD CONDUCTORS

– All Aluminium

– All Aluminium alloy 1120

– ACSR

– Steel earth wire and stay wire (galvanised or aluminium clad)

HV DISTRIBUTION CABLES

U/G XLPE to 33kV

Paper insulated lead covered to 33kV

Aerial bundled cable XLPE to 33kV (metallic and non-metallic screened)

Covered Conductor

Single Point Suspension

11kV to 33kV (EHV also)

XLPE, EPR or PILC insulation

Radial water barrier:

– Al/HDPE, LAS, stainless steel sheath

Mechanical protection:

– Single, double wire armour, HDPE, hessian-served

LO-SAG COVERED CONDUCTOR

ABBREVIATIONS

A.m	Ampere metre	L.D.	light duty
ABC	aerial bundled cable	mm	millimetre
AC	alternating current	MM	Multi Mode (Fibre)
Al	aluminium	nF/km	nanofarad/kilometre
AS	Australian Standard	OD	outside diameter
C	core	O.D.	ordinary duty
°C	degree Celsius	PACW	plain annealed copper wire
CPE	Chlorinated Polyethylene	PE	Polyethylene
CSA	cross-sectional area	pf	power factor
CSP	Chlorosulphonated Polyethylene	pF/m	picofarad/metre
Cu	copper	PILC	paper insulated lead covered
dB	decibel	PVC	Polyvinyl Chloride
DC	direct current	R-CPE-90	rubber – Chlorinated Polyethylene – 90°C
E	earth	SM	Single Mode (Fibre)
EA	Ethylene Acrylic	SWA	steel wire armoured
Eff	efficiency	TACW	tinned annealed copper wire
ELV	Extra Low Voltage	TPE	thermoplastic elastomer
EPR	Ethylene Propylene Rubber	UTP	unshielded twisted pairs
HD	hard drawn	V	volt
H.D.	heavy duty	V-75	75°C rated PVC
HFS-90-TP	halogen free sheath – 90°C – thermoplastic	V-90	90°C rated PVC
HF-110-R	halogen free – 110°C – rubber (sheath)	V-90RP	PVC 90°C insulation formulated for Reduced Propagation of Fire
hp	horsepower	5V-90RP	PVC 90°C sheathing formulated for Reduced Propagation of Fire
HR	heat resistant	V-90HT	90°C rated PVC – 105°C for restricted periods
HRC	high rupture capacity	X-HF-90	XLPE – halogen free – 90°C
ISDN	Integrated Services Digital Network	X-90	Cross-linked Polyethylene
kg	kilogram		
kN	kilonewton		
kV	kilovolt		
kVA	kilovoltamp		
kW	kilowatt		
LAN	local area network		

NEXANS OLEX LOCATIONS

VICTORIA

Head Office

15/300 La Trobe Street,
Melbourne, VIC 3000

Victoria Sales

1300 CABLES
(1300 222 537)

NEW SOUTH WALES/ AUSTRALIAN CAPITAL TERRITORY

State Office

Suite 6, L1 1183-1187
The Horsely Drive,
Wetherill Park,
NSW 2164
P: 1300 CABLES
(1300 222 537)
F: 1300 556 551

WESTERN AUSTRALIA

State Office

857 Abernethy Road,
Forrestfield WA 6058
P: 1300 CABLES
(1300 222 537)
F: 08 9353 2688

QUEENSLAND

State Office

541 Bilsen Road,
Virginia QLD 4014
P: 1300 CABLES
(1300 222 537)
F: 07 3259 2606

MANUFACTURING LOCATIONS

Lilydale

55 Main Street, Lilydale
VIC 3140

New Zealand

Nexans Olex
New Zealand Ltd
Paraite Road, Bell Block,
New Plymouth,
New Zealand
P: 64 6 755 9800
F: 64 6 755 9890

SUBSCRIPTION

WOULD YOU LIKE THE NEXT EDITION OF THE HANDBOOK DELIVERED TO YOUR DOOR?

If you would like to be kept up-to-date with the latest cabling information from Nexans Olex and receive the next edition of The Handbook please return this subscription page to Nexans Olex Australia, 15/300 La Trobe Street, Melbourne, VIC 3000, Australia

Title* _____

Name* _____

Company name* _____

Postal address* _____

Number of copies required* _____

Contact phone number _____

Email _____

*mandatory information

Would you like to be kept up-to-date with industry news and information relating to the Nexans Olex range of products and services?

Yes, please email No thanks

Would you like to receive any further information on any Nexans Olex range of cables?

No thanks Yes, please specify _____

All information received on this form will be kept strictly confidential and will be used only for the purposes of sending you the next edition of The Handbook and for sending information of interest (only if you have requested above).

Nexans Olex has taken every precaution to ensure that the information contained in this booklet is in line with requirements of the appropriate Australian Standards and correct electrical practice. However, we accept no liability of any kind with respect to the information presented here. All information is subject to change without notice. Note: Current carrying capacity tables stated in this handbook are based on AS/NZS 3008.1, Electrical Installations – Selection of Cables, Part 1: Cables for alternating voltages up to and including 0.6/1kV. The latest edition of this handbook and other Nexans Olex product catalogues is always available at www.olex.com.au OLC15984 July 2017

SAFETY WARNING

Cables are insulated and sheathed with stable materials which may contain certain toxic substances including lead. Insulation and sheathing materials should not be chewed or ingested.

Should you require more detailed data regarding materials, please contact our Group Safety Manager on 03 9281 4444 or refer to our web site, www.olex.com.au

Installation Cables must be installed in accordance with the requirements of Section 3 – Selection and Installation of Wiring Systems in the latest issue of AS/NZS 3000 or the appropriate ruling standard in the country of installation. Cables must also be connected by a licensed electrician, as ruled in the state or country of installation. In particular your attention is drawn to Section 1.5 of the Wiring Rules (AS/NZS 3000) – Fundamental Principles.

Designers and installers can be assured the products provided by Nexans Olex meet the requirements of the relevant cable standard, but must ensure appropriate selection of cables for the electrical installation conditions.

Hazardous Areas Installation of wiring and fittings for hazardous areas, e.g. flammable or explosive gas, liquid, dust or solids must comply with Section 7.7 – Hazardous Areas, of AS/NZS 3000, and other relevant Australian Standards for specific hazards and occupancies.

Technical Note

PVC 90 C Thermal Rating The current carrying capacities for thermoplastic cables, including flexible cords used as fixed wiring, insulated with V-90 and V-90HT PVC compounds have been based on a conductor operating temperature of 75°C (refer AS/NZS 3008.101 Table 1 Note 2).

Subtle differences in construction methodology and use of materials indicate that data in this catalogue relate only to Nexans Olex manufactured products.



Nexans Olex as a member of Australian cable makers Association supports the Approved Cables Initiative. The focus of ACI is to ensure that electrical cables available in the Australian market are fully compliant to the relevant Australian standards. Find out more by visiting www.australiancablemakers.com



Sometimes the sequel is even better than the original.

With the addition of technological wonder that is **Geo Location™** Nexans Olex is proud to announce the sequel to their 2011 blockbuster app, The Handbook. Thanks to Geo Location™ you can now find the perfect cable product, as well as the perfect place to buy it. So break out the popcorn and choctops and get ready for the best sequel you've ever seen.

Download the smartphone here or search your App store for 'Olex Handbook'

