



Assemblies for Construction Sites

Temporary Power Distribution System



Product information as at:01 / 2020

ENYCON



ENYCON

- For temporary power distribution upto 630A
- Degree of Protection: IP44 - IP65
- Thermoplastic (polycarbonate)
- Insulated and shock proof
- Dust proof & Water tight
- Anti - Corrosive
- Inner cover for additional protection for unskilled operators
- Impact proof
- In accordance with IEC 61 439 part 4 "Particular requirements for Assemblies for Construction sites"




Outgoings via CEE sockets up to 63 A




Inner cover for additional protection for unskilled operators



Choice of mounting frames



Glow wire test passed with 960° C

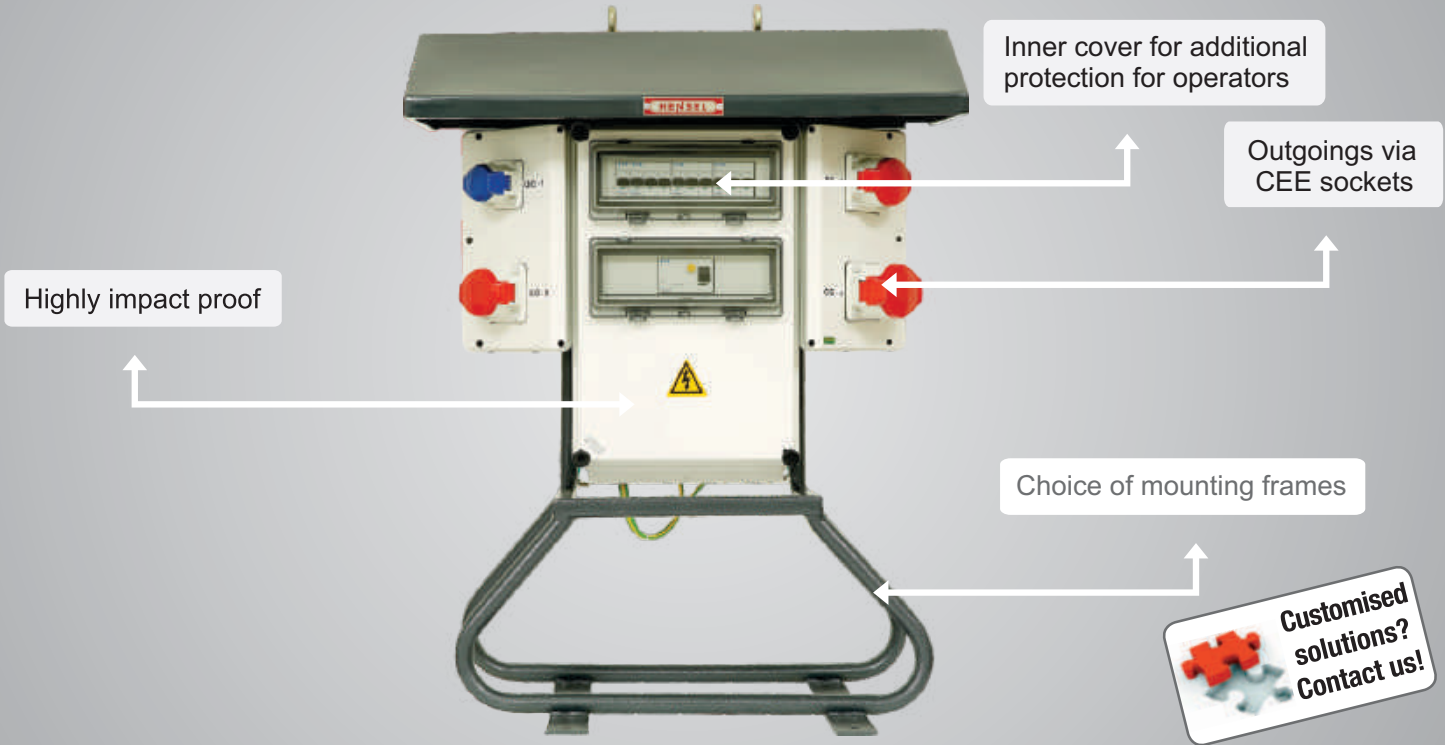


Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
1.	CP 3001 CP 3001W	Thermoplastic Polycarbonate 700x825x525mm	IP 44 ▲ IP 65 ▲▲	M32 / M25 Each 2Nos.	63A FP 100mA RCCB with terminals suitable up to 25 Sq.mm	32A 5Pin Socket 1No. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 1No.	32A TP MCB - 1No. 16A TP MCB - 2Nos. 16A SP MCB - 1No.
	CP 3002 CP 3002W	Thermoplastic Polycarbonate 700x825x525mm	IP 44 ▲ IP 65 ▲▲	M32 / M25 Each 2Nos.	63A FP 100mA RCCB with terminals suitable up to 25 Sq.mm	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 3Nos.	32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 3Nos.
	CP 3003 CP 3003W	Thermoplastic Polycarbonate 700x825x525mm	IP 44 ▲ IP 65 ▲▲	M32 / M25 Each 2Nos.	40A FP 100mA RCCB with terminals suitable up to 25 Sq.mm	16A 5Pin Socket 1No. 16A 3Pin Socket 4Nos.	16A TP MCB - 1No. 16A SP MCB - 4Nos.
	CP 3004 CP 3004W	Thermoplastic Polycarbonate 700x825x525mm	IP 44 ▲ IP 54 ▲▲	M32 / M25 Each 2Nos.	63A FP 100mA RCCB with terminals suitable up to 25 Sq.mm	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Schuko Socket 3Nos.	32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 3Nos.
	CP 3005 CP 3005W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 ▲ IP 65 ▲▲	M40 / M32 Each 1 no. M25 2 Nos	100A FP 100mA RCCB with terminals suitable up to 50 Sq.mm	63A 5Pin Socket 1No. 32A 5Pin Socket 1No. 16A 3Pin Socket 1No.	63A TP MCB - 1No. 32A TP MCB - 1No. 16A SP MCB - 1No.

Note: CEE plugs to be ordered separately

Application References



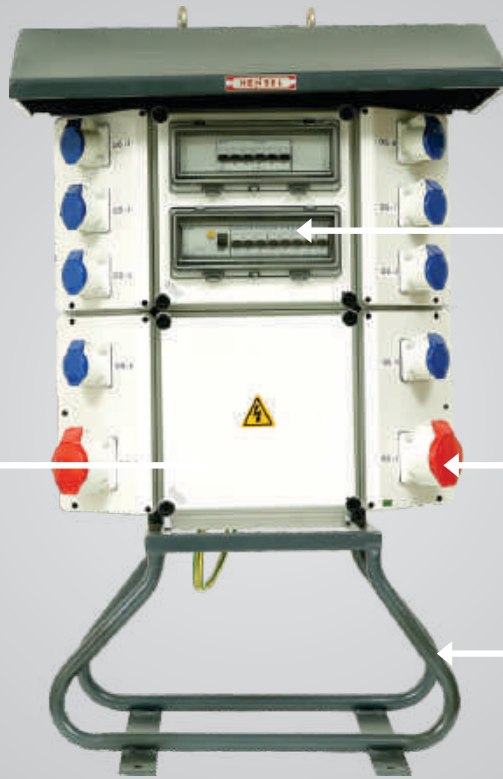

Highly impact proof

Inner cover for additional protection for operators

Outgoings via CEE sockets

Choice of mounting frames

Customised solutions? Contact us!

Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
2.	CP 5001 CP 5001W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 65	M40 / M32 Each 1 No. M25 2 Nos.	63A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	32A 5Pin Socket - 2 Nos. 16A 3Pin Socket - 8 Nos.	32A TP MCB - 2 Nos. 16A SP MCB - 8 Nos.
	CP 5002 CP 5002W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 65	M40 / M32 Each 1 No. M25 2 Nos.	80A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	32A 5Pin Socket - 2 Nos. 16A 5Pin Socket - 2 Nos. 16A 3Pin Socket - 6 Nos.	32A TP MCB - 2 Nos. 16A TP MCB - 2 Nos. 16A SP MCB - 6 Nos.
	CP 5003 CP 5003W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 54	M40 / M32 Each 1 No. M25 2 Nos.	80A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	32A 5Pin Socket - 2 Nos. 16A 5Pin Socket - 2 Nos. 16A 3Pin Schuko Socket - 6 Nos.	32A TP MCB - 2 Nos. 16A TP MCB - 2 Nos. 16A SP MCB - 6 Nos.
	CP 5004 CP 5004W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 65	M40 / M32 Each 1 No. M25 2 Nos.	100A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	63A 5Pin Socket - 1 No. 32A 5Pin Socket - 1 No. 16A 5Pin Socket - 2 Nos. 16A 3Pin Socket - 6 Nos.	63A TP MCB - 1 No. 32A TP MCB - 1 No. 16A TP MCB - 2 Nos. 16A SP MCB - 6 Nos.
	CP 5005 CP 5005W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 65	M40 / M32 Each 1 No. M25 2 Nos.	100A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	32A 5Pin Socket - 2 Nos. 16A 5Pin Socket - 3 Nos. 16A 3Pin Socket - 3 Nos.	32A TP MCB - 2 Nos. 16A TP MCB - 3 Nos. 16A SP MCB - 3 Nos.
	CP 5006 CP 5006W	Thermoplastic Polycarbonate 700x975x525mm	IP 44 IP 65	M40 / M32 Each 1 No. M25 2 Nos.	125A FP 100mA RCCB with Terminals suitable up to 50 Sq. Mm	63A 5Pin Socket - 1 No. 32A 5Pin Socket - 2 Nos. 16A 5Pin Socket - 2 Nos. 16A 3Pin Socket - 3 Nos.	63A TP MCB - 1 No. 32A TP MCB - 2 Nos. 16A TP MCB - 2 Nos. 16A SP MCB - 3 Nos.

Note: CEE plugs to be ordered separately

Covers of the schuko sockets are made of thermoplastic. Opening angle of 180°. **Absolutely maintenance free.**

Compact and portable

Tinted transparent cover - easy access to breakers.

Every single combination comes with a test certificate (inside the transparent cover) - for documented safety.


For rough use

Customised solutions? Contact us!



Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
1.	CR 1008	Solid Rubber 270x270x310mm	IP 44 ▲		25A FP 30mA RCCB 16A 5Pin Appliance Plug & Coupler 1No.	16A 3Pin Schuko Socket 6Nos.	16A SP MCB - 6Nos.
	CR 1009	Solid Rubber 270x270x310mm	IP 44 ▲		40A FP 30mA RCCB 32A 5Pin Appliance Plug & Coupler 1No.	16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	16A TP MCB - 1No. 16A SP MCB - 2Nos.
	CR 1010	Solid Rubber 270x270x310mm	IP 44 ▲		63A 5Pin Appliance Plug & Coupler 1No.	32A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	32A TP MCB - 2Nos. 16A SP MCB - 4Nos.
	CR 1011	Solid Rubber 270x270x310mm	IP 44 ▲		63A 5Pin Appliance Plug & Coupler 1No.	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Schuko Socket 4Nos.	32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 4Nos.
	CR 1012	Solid Rubber 270x270x310mm	IP 44 ▲		63AFP 30mA RCCB 63A 5Pin Appliance Plug & Coupler 1No.	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Schuko Socket 3Nos.	16A TP MCB - 1No. 16A SP MCB - 3Nos.
	CR 1013	Solid Rubber 270x270x310mm	IP 44 ▲		63A 5Pin Appliance Plug & Coupler 1No.	32A 5Pin Socket 1No. 16A 5Pin Socket 2Nos.	32A TP MCB - 1No. 16A TP MCB - 2Nos.
	CR 1014	Solid Rubber 270x270x310mm	IP 44 ▲		63A 5Pin Appliance Plug & Coupler 1No.	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 2Nos.	32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 2Nos.
2.	CR 2006	Synthetic Rubber 270x270x450mm	IP 44 ▲		80A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 8Nos.	32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 4Nos.
	CR 2007	Synthetic Rubber 270x270x450mm	IP 44 ▲		125AFP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	63A 5Pin Socket 1No. 32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 4Nos.
	CR 2008	Synthetic Rubber 270x270x450mm	IP 44 ▲		63A FP 30mA RCCB 63A 5Pin Appliance Plug & Coupler	16A 5Pin Socket 3Nos. 16A 3Pin Socket 3Nos. 16A 3Pin Schuko Socket 4Nos.	16A TP MCB - 3Nos. 16A SP MCB - 7Nos.
	CR 2009	Synthetic Rubber 270x270x450mm	IP 44 ▲		63A FP 30mA RCCB 63A 5Pin Appliance Plug & Coupler	32A 5Pin Socket 1No. 32A 3Pin Socket 1No. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	32A TP MCB - 1No. 32A SP MCB - 1No. 16A TP MCB - 2Nos. 16A SP MCB - 6Nos.
	CR 2010	Synthetic Rubber 270x270x450mm	IP 44 ▲		80AFP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos. 16A 3Pin Schuko Socket 2Nos.	32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 4Nos.

Note: CEE plugs to be ordered separately

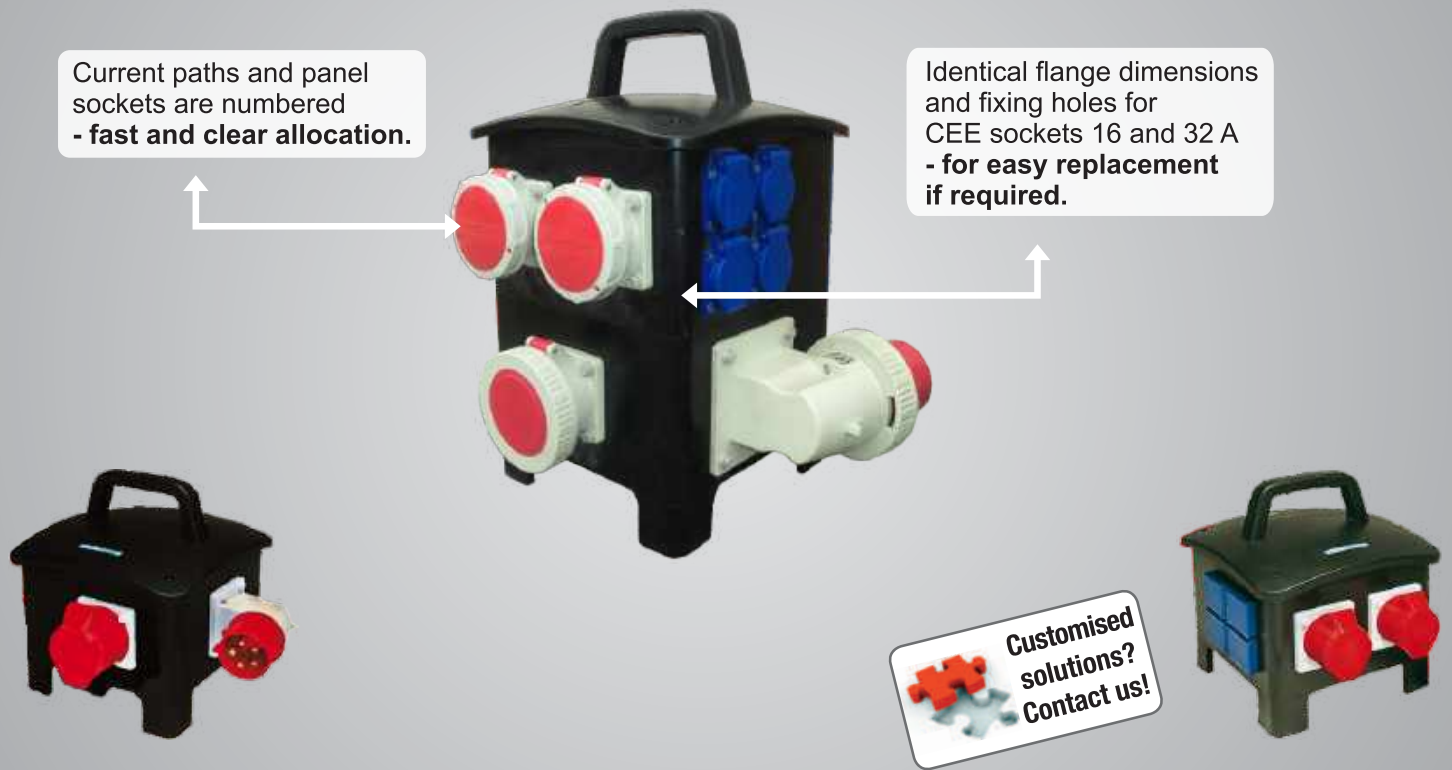

Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
3.	CR 3006	Synthetic Rubber 270x270x590mm	IP 44 ▲		125A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	63A 5Pin Socket 1No. 32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos. 16A 3Pin Schuko Socket 3Nos.	63A TP MCB - 1No. 32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 5Nos.
	CR 3007	Synthetic Rubber 270x270x590mm	IP 44 ▲		125A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	63A 5Pin Socket 2Nos. 32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos.	63A TP MCB - 2Nos. 32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 2Nos.
	CR 3008	Solid Rubber 270x270x590mm	IP 44 ▲		125A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 6Nos.	32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 6Nos.
	CR 3009	Solid Rubber 270x270x590mm	IP 44 ▲		125A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	63A 5Pin Socket 1No. 32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 4Nos. 16A 3Pin Schuko Socket 4Nos.	63A TP MCB - 1No. 32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 8Nos.
	CR 3010	Solid Rubber 270x270x590mm	IP 44 ▲		125A FP 30mA RCCB 125A 5Pin Appliance Plug & Coupler	63A 5Pin Socket 2Nos. 32A 5Pin Socket 2Nos. 16A 3Pin Socket 4Nos. 16A 3Pin Schuko Socket 4Nos.	63A TP MCB - 2Nos. 32A TP MCB - 2Nos. 16A SP MCB - 8Nos.

Note: CEE plugs to be ordered separately

Application References






Wall Mounting



Multiple Extension Units

Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
Wall Mounting							
1.	CR 4001	Solid Rubber 370x280x190mm	IP 44 ▲		40A FP 30mA RCCB with terminals to terminate the incoming Cable with Gland	16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 3Nos.	16A TP MCB - 2Nos. 16A SP MCB - 3Nos.
	CR 4002	Solid Rubber 370x280x190mm	IP 44 ▲		63A FP 30mA RCCB with terminals to terminate the incoming Cable with Gland	32A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 3Nos.	32A TP MCB - 2Nos. 16A SP MCB - 3Nos.
	CR 4003	Solid Rubber 370x280x190mm	IP 44 ▲		63A FP 30mA RCCB with terminals to terminate the incoming Cable with Gland	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Schuko Socket 3Nos.	32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 3Nos.
	CR 4004	Solid Rubber 420x345x213mm	IP 44 ▲		Suitable terminals to terminate the incoming with Cable Gland	32A 5Pin Socket 2Nos. 16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	32A TP MCB - 2Nos. 16A TP MCB - 2Nos. 16A SP MCB - 4Nos.
	CR 4005	Solid Rubber 420x345x213mm	IP 44 ▲		Suitable terminals to terminate the incoming with Cable Gland	63A 5Pin Socket 1No. 32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 1No. 16A 3Pin Schuko Socket 2Nos.	63A TP MCB - 1No. 32A TP MCB - 1No. 16A TP MCB - 1No. 16A SP MCB - 3Nos. 25A DP 30mA RCCB 1No. (For Schuko only)
	CR 4006	Solid Rubber 420x345x213mm	IP 44 ▲		Suitable terminals to terminate the incoming with Cable Gland	63A 5Pin Socket 1No. 32A 5Pin Socket 1No. 16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos.	63A TP MCB - 1No. 32A TP MCB - 1No. 16A TP MCB - 2Nos. 16A SP MCB - 2Nos.
Multiple Extension Units							
2.	CR 5005 CR 5005W	Solid Rubber 462x150x143mm 462x150x142mm	IP 44 ▲ IP 65 ▲▲	5C x 6Sq.mm Cable 2mtr with Gland	32A 5Pin Plug	16A 5Pin Socket 2Nos.	16A TP MCB - 2Nos.
	CR 5006 CR 5006W	Solid Rubber 462x150x155mm 462x150x156mm	IP 44 ▲ IP 65 ▲▲	5C x 6Sq.mm Cable 2mtr with Gland	32A 5Pin Plug	32A 5Pin Socket 1No. 16A 5Pin Socket 1No.	32A TP MCB - 1No. 16A TP MCB - 1No.
	CR 5007	Solid Rubber 462x150x112mm	IP 54 ▲	5C x 2.5Sq.mm Cable 2mtr with Gland	16A 5Pin Plug	16A 3Pin Schuko Socket 4Nos.	25A FP 30mA RCCB - 1No.
	CR 5008	Solid Rubber 462x150x112mm	IP 54 ▲	5C x 2.5Sq.mm Cable 2mtr with Gland	16A 5Pin Plug	16A 3Pin Schuko Socket 6Nos.	
	CR 5009 CR 5009W	Solid Rubber 347x82x122mm 347x82x122mm	IP 44 ▲ IP 54 ▲	3C x 2.5Sq.mm Cable 2mtr with Gland	16A 3Pin Plug	16A 3Pin Socket 1No.	25A DP 30mA RCCB - 1No.
	CR 5010 CR 5010W	Solid Rubber 347x82x122mm 347x82x122mm	IP 44 ▲ IP 54 ▲	3C x 2.5Sq.mm Cable 2mtr with Gland	16A 3Pin Plug	16A 3Pin Socket 2Nos.	
	CR 5011	Solid Rubber 347x82x92mm	IP 54 ▲	3C x 2.5Sq.mm Cable 2mtr with Gland	16A 3Pin Plug	16A 3Pin Schuko Socket 2Nos.	25A DP 30mA RCCB - 1No.
	CR 5012	Solid Rubber 347x82x92mm	IP 54 ▲	3C x 2.5Sq.mm Cable 2mtr with Gland	16A 3Pin Plug	16A 3Pin Schuko Socket 3Nos.	

Note: CEE plugs to be ordered separately

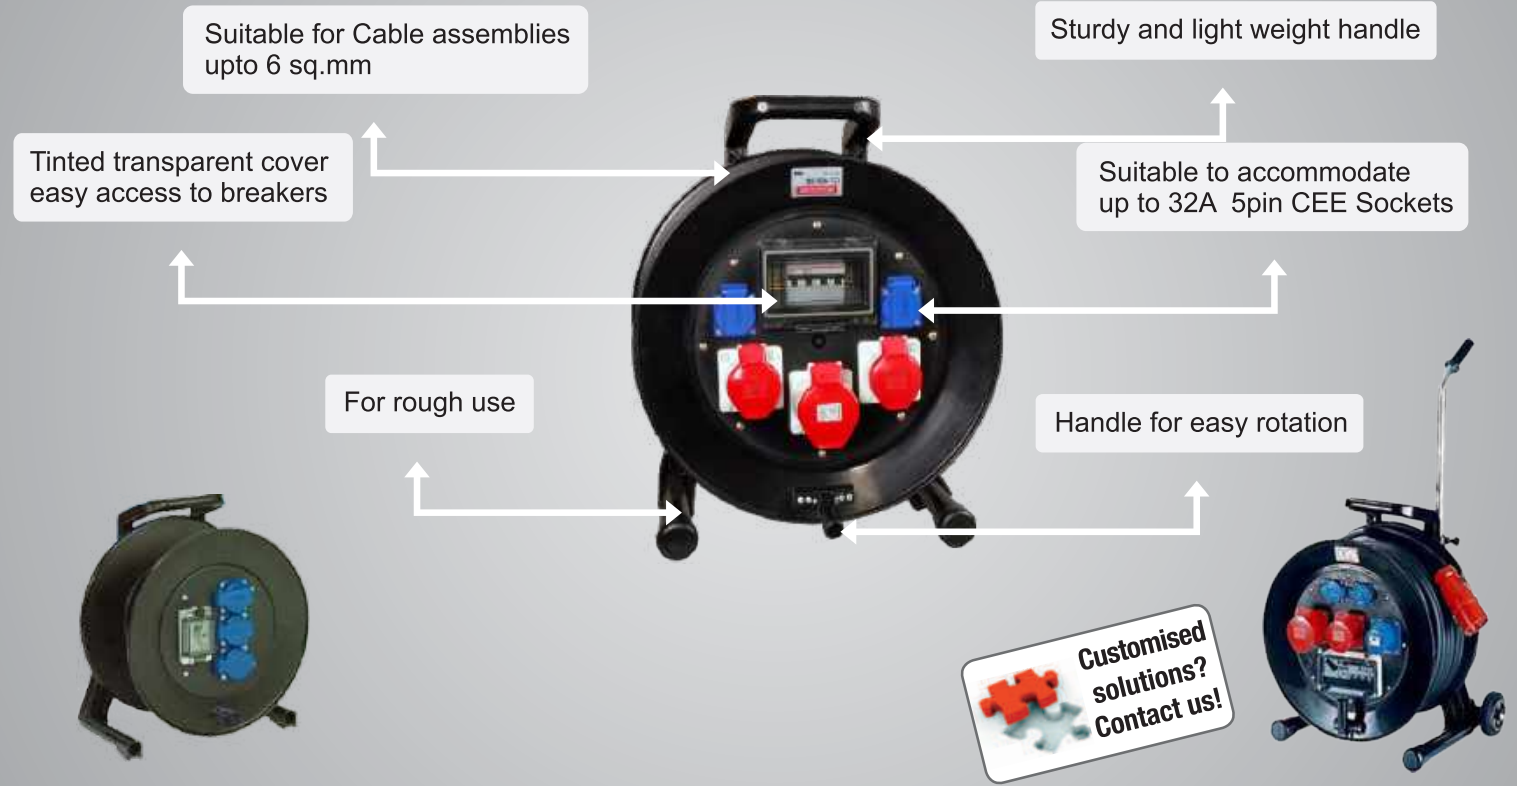


Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
1.	CD 2351-1 (with cable) CD 2351-2 (without cable)	Synthetic Rubber 235	IP 44 ▲	5C x 1.5Sq.mm - 19Mtrs	16A 5Pin Plug Terminals	16A 5Pin Socket 1No.	
	CD 2352-1 (with cable) CD 2352-2 (without cable)	Synthetic Rubber 235	IP 44 ▲	3C x 1.5Sq.mm - 24Mtrs	16A 3Pin Plug Terminals	16A 3Pin Socket 1No.	
	CD 2355-1 (with cable) CD 2355-2 (without cable)	Synthetic Rubber 235	IP 44 ▲	3C x 2.5Sq.mm - 19Mtrs	16A 3Pin Plug Terminals	16A 3Pin Schuko Socket 2Nos.	
	CD 2356-1 (with cable) CD 2356-2 (without cable)	Synthetic Rubber 235	IP 44 ▲	3C x 2.5Sq.mm - 19Mtrs	16A 3Pin Plug Terminals	16A 3Pin Schuko Socket 3Nos.	
2.	CD 3105-1 (with cable) CD 3105-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	5C x 2.5Sq.mm - 24Mtrs	16A 5Pin Plug Terminals	16A 5Pin Sockets 2Nos.	
	CD 3107-1 (with cable) CD 3107-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	5C x 2.5Sq.mm - 24Mtrs	16A 5Pin Plug Terminals	16A 5Pin Socket 2Nos. 16A 3Pin Schuko Sockets 1No.	
	CD 3108-1 (with cable) CD 3108-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	3C x 4Sq.mm - 24Mtrs	32A 3Pin Plug Terminals	16A 3Pin Schuko Socket 4Nos.	
	CD 3109-1 (with cable) CD 3109-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	3C x 4Sq.mm - 24Mtrs	32A 3Pin Plug Terminals	16A 3Pin Schuko Socket 5Nos.	
	CD 31010-1 (with cable) CD 31010-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	3C x 4Sq.mm - 24Mtrs	32A 3Pin Plug Terminals	16A 3Pin Socket 4Nos.	
	CD 31011-1 (with cable) CD 31011-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	3C x 4Sq.mm - 24Mtrs	32A 3Pin Plug Terminals	16A 3Pin Socket 1No. 16A 3Pin Schuko Socket 3Nos.	
	CD 31012-1 (with cable) CD 31012-2 (without cable)	Synthetic Rubber 310	IP 44 ▲	3C x 4Sq.mm - 24Mtrs	32A 3Pin Plug Terminals	16A 3Pin Sockets 2Nos. 16A 3Pin Schuko Socket 2Nos.	
3.	CD 3804-1 (with cable) CD 3804-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	3C x 4Sq.mm - 49Mtrs	32A 3Pin Plug Terminals	16A 3Pin Socket 2Nos.	16A SP MCB - 2Nos.

Note: CEE plugs to be ordered separately

Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
	CD 3807-1 (with cable) CD 3807-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	5C x 6sq.mm - 24Mtrs	32A 5Pin Plug Terminals	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Schuko Socket 2Nos.	
	CD 3808-1 (with cable) CD 3808-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	3C x 4Sq.mm - 32Mtrs	32A 3Pin Plug Terminals	16A 3Pin Schuko Socket 6Nos.	
	CD 3809-1 (with cable) CD 3809-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	3C x 2.5Sq.mm - 49Mtrs	16A 3Pin Plug Terminals	16A 3Pin Schuko Socket 3Nos.	16A SP MCB - 3Nos.
	CD 38010-1 (with cable) CD 38010-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	3C x 4Sq.mm - 32Mtrs	32A 3Pin Plug Terminals	16A 3Pin Socket 5Nos.	
	CD 38011-1 (with cable) CD 38011-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	5C x 6sq.mm - 24Mtrs	32A 5Pin Plug Terminals	16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 4Nos.	
	CD 38012-1 (with cable) CD 38012-2 (without cable)	Synthetic Rubber 380	IP 44 ▲	5C x 6sq.mm - 24Mtrs	32A 5Pin Plug Terminals	16A 5Pin Socket 2Nos. 16A 3Pin Socket 2Nos.	
4.	CD 4503-1 (with cable) CD 4503-2 (without cable) CD 4503-3 (Trolley with cable) CD 4503-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	5C x 6Sq.mm - 24Mtrs	32A 5Pin Plug 40A FP 30mA RCCB Terminals	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 1No. 16A 3Pin Schuko Socket 2Nos.	16A SP MCB 2Nos.
	CD 4504-1 (with cable) CD 4504-2 (without cable) CD 4504-3 (Trolley with cable) CD 4504-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	5C x 6Sq.mm - 24Mtrs	32A 5Pin Plug 40A FP 30mA RCCB Terminals	16A 5Pin Socket 2Nos. 16A 3Pin Socket 1No. 16A 3Pin Schuko Socket 2Nos.	16A SP MCB 2Nos.
	CD 4505-1 (with cable) CD 4505-2 (without cable) CD 4505-3 (Trolley with cable) CD 4505-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	5C x 6Sq.mm - 24Mtrs	32A 5Pin Plug Terminals	32A 5Pin Socket 1No. 16A 5Pin Socket 1No. 16A 3Pin Socket 1No. 16A 3Pin Schuko Socket 2Nos.	
	CD 4506-1 (with cable) CD 4506-2 (without cable) CD 4506-3 (Trolley with cable) CD 4506-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	5C x 6Sq.mm - 24Mtrs	32A 5Pin Plug 40A FP 30mA RCCB Terminals	32A 5Pin Socket 1No. 16A 5Pin Socket 2Nos. 16A 3Pin Schuko Socket 2Nos.	16A SP MCB 2Nos.
	CD 4507-1 (with cable) CD 4507-2 (without cable) CD 4507-3 (Trolley with cable) CD 4507-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	3C x 4Sq.mm - 49Mtrs	32A 3Pin Plug Terminals	16A 3Pin Schuko Socket 8Nos.	
	CD 4508-1 (with cable) CD 4508-2 (without cable) CD 4508-3 (Trolley with cable) CD 4508-4 (Trolley without cable)	Synthetic Rubber 450	IP 44 ▲	3C x 4Sq.mm - 49Mtrs	32A 3Pin Plug Terminals	16A 3Pin Schuko Socket 8Nos.	16A SP MCB 4Nos.

Note: CEE plugs to be ordered separately

Application References





Sl.no	Cable Bridges	Description
1	39870090	Cable protector 1c straight solid rubber, black LxWxH: 1000 x 130 x 20 mm load up 200kg 1 channel size: 10 x 40 mm
2	39870020	Cable protector 2c straight solid rubber, black/yellow LxWxH: 1000 x 250 x 48 mm axle load up to 9t 2 channel size each 28 x 30 mm
3	39870080	Cable protector 2c maxi straig solid rubber, black/yellow LxWxH: 800 x 590 x 105 mm axle load up to 9t 2 channel Maxi size: each 80 x 80 mm
4	39870040	Cable protector 4c straight solid rubber, black/yellow LxWxH: 800 x 590 x 78 mm axle load up to 9t 4 channel 2x channel size 52 x 52 mm and 2x channel size 52 x 46 mm
5	39870050	Cable protector 5c straig solid rubber, black/yellow LxWxH: 800 x 445x 50 mm axle load up to 9t 5 channel size: each 35 x 35 mm
Accessories		
for Sl. 2	39870021	Cable protector 2c curve 30° solid rubber, black/yellow LxWxH: 280 x 250 x 48 mm axle load up to 9t 2 channel size: each 28 x 30 mm
for Sl. 2	39870022	Cable protector 2c endpiece solid rubber, black LxWxH: 150 x 250 x 48 mm axle load up to 9t 2 channel size: each 28 x 30 mm
connecting tap for 39870021 & 39870022 (each side 2 pcs)	39870023	Cable protector 2c joint solid rubber, black LxWxH: 45 x 30 x 38 mm
for Sl. 4	39870041	Cable protector 4c curve 30° solid rubber, black/yellow LxWxH: 455 x 590 x 78mm axle load up to 9t 4 channel 2x channel size 52 x 52 mm and 2x channel size 52 x 46 mm
for Sl. 4	39870042	Cable protector 4c endpiece solid rubber, black LxWxH: 300 x 590 x 78 mm axle load up to 9t 4 channel 2x channel size 52 x 52 mm and 2x channel size 52 x 46 mm
connecting tap for 39870041 & 39870042 (each side 2 pcs)	39870043	Cable protector 4c joint solid rubber, black LxWxH: 105 x 47 x 50 mm
for Sl. 5	39870051	Cable protector 5c curve 30° solid rubber, black/yellow LxWxH: 380 x 445 x 50 mm axle load up to 9t 5 channel size: each 35 x 35 mm
for Sl. 5	39870052	Cable protector 5c endpiece solid rubber, black LxWxH: 200 x 445 x 50 mm axle load up to 9t 5 channel size each 35 x 35 mm
connecting tap for 39870052 (each side 2 pcs)	39870053	Cable protector 5c endpiece solid rubber, black LxWxH: 200 x 445 x 50 mm axle load up to 9t 5 channel size each 35 x 35 mm





Extension Cable Sets

 Customised solutions? Contact us!

Sr. No.	Cat No.	Enclosure System / Dimensions	Degree of Protection	Cable Entry	Incomer	Outgoings	Outgoing Protection
1.	CC 1001		IP44 ▲	3Cx2.5sq.mm -5mts	16A 3Pin Plug	16A 3Pin Coupler	
	CC 1002		IP67 ●●	3Cx2.5sq.mm -5mts	16A 3Pin Plug	16A 3Pin Coupler	
	CC 1003		IP44 ▲	3Cx6sq.mm -5mts	32A 3Pin Plug	32A 3Pin Coupler	
	CC 1004		IP67 ●●	3Cx6sq.mm -5mts	32A 3Pin Plug	32A 3Pin Coupler	
	CC 1005		IP44 ▲	3Cx16sq.mm -5mts	63A 3Pin Plug	63A 3Pin Coupler	
	CC 1006		IP67 ●●	3Cx16sq.mm -5mts	63A 3Pin Plug	63A 3Pin Coupler	
	CC 1007		IP44 ▲	5Cx2.5sq.mm -5mts	16A 5Pin Plug	16A 5Pin Coupler	
	CC 1008		IP67 ●●	5Cx2.5sq.mm -5mts	16A 5Pin Plug	16A 5Pin Coupler	
	CC 1009		IP44 ▲	5Cx6sq.mm -5mts	32A 5Pin Plug	32A 5Pin Coupler	
	CC 1010		IP67 ●●	5Cx6sq.mm -5mts	32A 5Pin Plug	32A 5Pin Coupler	
	CC 1011		IP44 ▲	5Cx16sq.mm -5mts	63A 5Pin Plug	63A 5Pin Coupler	
	CC 1012		IP67 ●●	5Cx16sq.mm -5mts	63A 5Pin Plug	63A 5Pin Coupler	



**Hensel Electric India Private Limited
(Singapore Branch)**

Industrial Electrical Power Distribution Systems
25 International Business Park
#02-106, German Center for Industry and Trade
Singapore - 609916

Email : info@hensel-electric.in
web : www.hensel.in

Follow us on: 

 made in **GERMANY**
since 1931